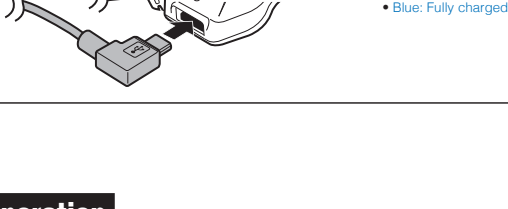## Sena Utility App

- Download
  - Android: Google Play Store > **Sena Utility**
  - iOS: App Store > **Sena Utility**

Sena Device Manager

The **Sena Device Manager** allows you to upgrade the firmware and configure its settings directly from your PC or Apple computer. Download the **Sena Device Manager** from sena.com.

Charging

- Red: Charging
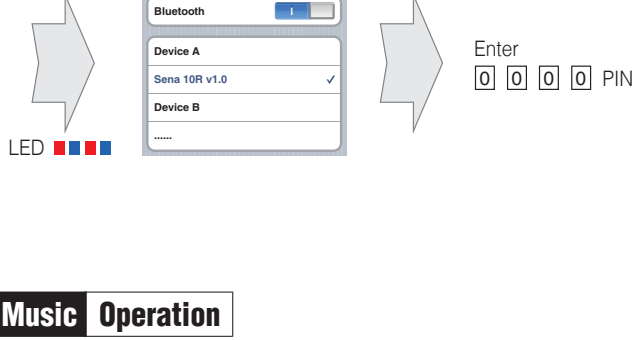- Blue: Fully charged

Button Operation

Tap	Tapping	Tap	Double Tapping
1"	Press for 1 sec	5" 12"	Press and Hold

Power On/Off

+ 1" Press

Volume Adjustment

or Tap

Battery Check

Power On

	LED
70 ~ 100%	
30 ~ 70%	
0 ~ 30%	

Phone, Music Pairing

10" Press → Tap

Select **Sena 10R**

Bluetooth	
Device A	
Sena 10R v1.0	✓
Device B	

Enter 0 0 0 0 PIN

LED

Music Operation

▶ / ❚❚		1" Press
◀◀		1" Press
▶▶		1" Press
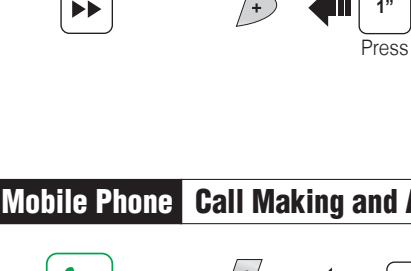
Mobile Phone Call Making and Answering

Answer			Tap
End			2" Press
Voice Dial			3" Press
Speed Dial			3" Press
Reject			2" Press

Intercom Pairing

Headset A ‹ - - Pairing - - › Headset B

5" Press LED   5" Press LED

↓

Tap

Intercom Start/End
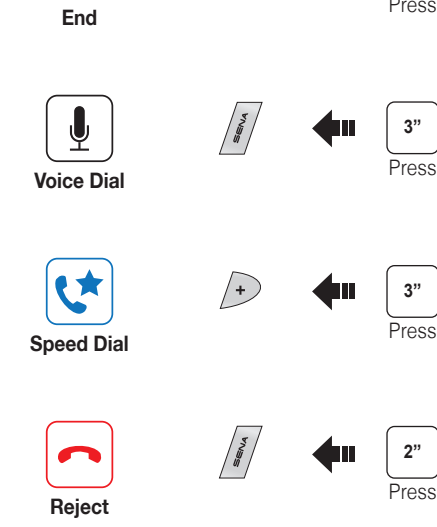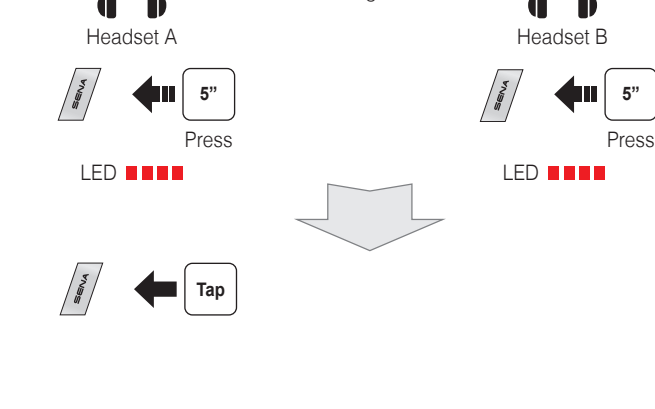
| | Tap | | Tap Double Tap |
| 1st Friend | | 2nd Friend | |

| | Tap Triple Tap |
| 3rd Friend | |
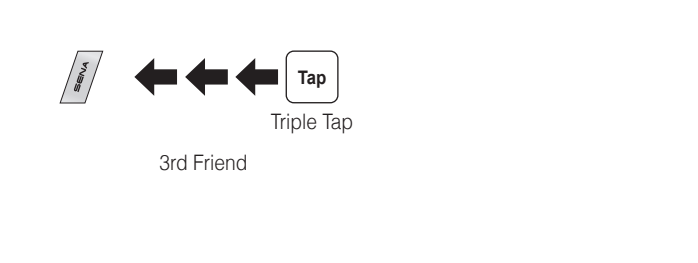
Setting

Configuration Menu

⚙ 10" Press

Troubleshooting

Factory Reset

If you want to restore the 10R to factory default settings, use the Factory Reset in the configuration menu. The headset automatically restores the default settings and turns off.

Fault Reset

If the 10R is not working properly for any reason, reset by gently pushing the pin-hole reset button located below the (+) button.

> You can download the full version of the manual and view other Sena products at the Sena website: www.sena.com.

10R Quick Reference

Type	Operation	Button Command	LED
Basic Function	Power on	Press the Center Button and the (+) Button for 1 second	Solid blue
	Power off	Press the Center Button and the (+) Button	Solid red
	Volume adjustment	Tap the (+) Button or the (-) Button	-
Mobile Phone	Answer mobile phone call	Tap the Center Button	-
	End mobile phone call	Press the Center Button for 2 seconds	-
	Voice dial	Press the Center Button for 3 seconds	-
	Speed dial	Press the (+) Button for 3 seconds	-
	Reject incoming call	Press the Center Button for 2 seconds	-
Intercom	Intercom pairing	Press the Center Button for 5 seconds	Red flashing
		Tap the Center Button of any one of the two headsets	-
	Start/End each intercom	Tap the Center Button	-
	End all intercoms	Press the Center Button for 3 seconds	-
	Start Group Intercom	Tap the (+) Button and the (-) Button at the same time	Blue and red flashing
	End Group Intercom	Press the Center Button for 3 seconds	-
Music	Play/Pause Bluetooth music	Press the Center Button for 1 second	-
	Track forward/back	Press the (+) Button or the (-) Button for 1 second	-