



SMART WATCH COMBO

User Manual




2.01” Full touch Smart Watch

Bluetooth Call / Wireless charging




Bluetooth Earbuds

OWS style, touch controls




Power bank

5000 mAh



Charging Cable

Type-C + Type-C
100cm / Fast Charging For
Power Bank & Earbuds

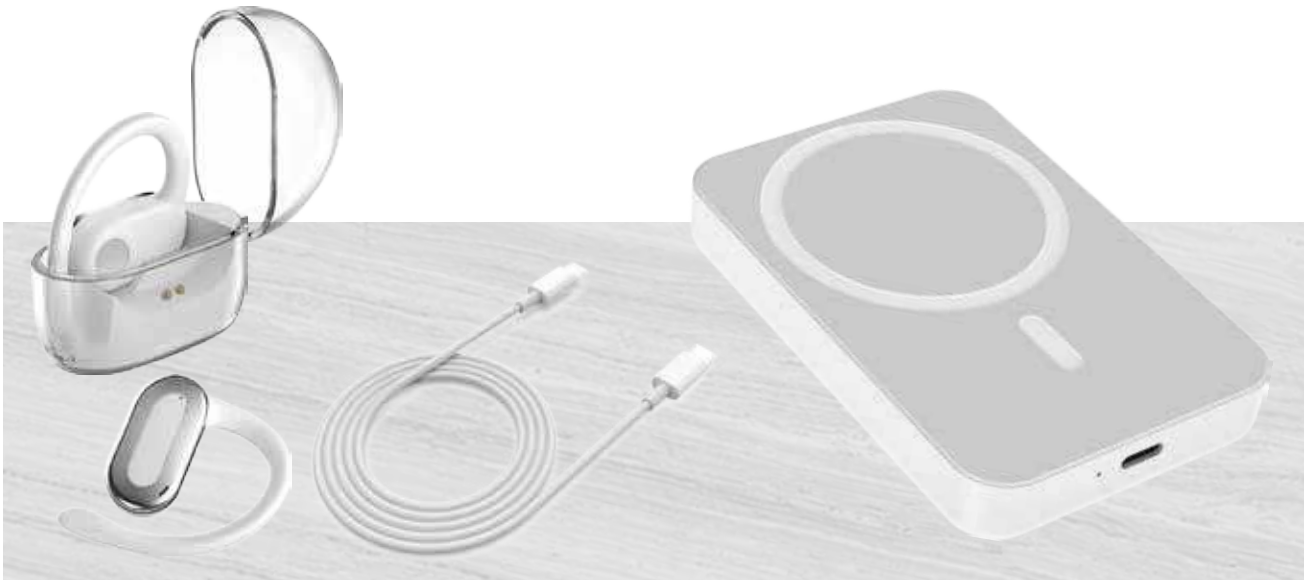

- Smart Watch -

Adapt to platform requirements:

- Android 5.0 and above mobile phones
- iOS 9.0 and above mobile phones
- Support Bluetooth BT 3.0


APP download method:



- IOS/Android phone users:** scan the above QR code to download and install the application.
- Android:** Search for "HryFine" through the software application store to download and install the application.
- Apple:** Search for "HryFine" through the App store to download and install the app.
- WeChat:** Follow the official account "Deer Enjoy Planet", you can get the download link to download on the official account.

Initial use

- To ensure the normal use of the smart watch, please charge it first.
 - Before charging, make sure the charging pot is clean and dry.
 - Using other companies' chargers may result in slow charging and
- Step 1:** Place the charging contact of the smart watch onto the USB charging dock (Concave side)
Step 2: Connect the USB end of the charging cable into an USB Power source. When connected successfully, you will see the charging indication on the watch screen.



Charging time: It takes about 2.5 hours to fully charge your Smart Watch. Remove the watch once it is fully charged.


- WARNING:** Do not place metal between the smart watch & the charging pot, including but not limited to metal brackets for magnetic mounts, magnets, phone grip rings, keys/key rings, coins & paperclips.

Watch +APP +Smart Phone Pair

- The watch and the smart phone must be connected via Bluetooth, after the APP **Hryfine** downloaded into the phone, to guarantee all functions performance.
- Pair between smartphone and watch via APP :** After switch on the Bluetooth setting menu on your smartphone, activate APP Hryfine, it will remind you to enable the notification point to confirm. Click to add a device, search for the device name "IK-WS28" and click Connect to pair the watch device.
- Connect BT3.0 Bluetooth for audio play:** Enter the Bluetooth terminal of the mobile phone and search for another Bluetooth point "Hry3.0" in case you need audio broadcast via watch including call and music play.
- How to verify that the Bluetooth connection is successful:** The Bluetooth icon in the the watch main menu indicates the Bluetooth connection status. Also you can click "find the phone" or enter the APP to "find the watch". If there is vibration on the watch or the phone warns, it means both devices are connected successfully via the APP.

Operation instructions for keys & screen :

- Rotary key (up):**
 - Rotate to switch the watch faces
 - Rotate to switch the main menu items
 - Short press to enter the main menu
- Power / Off screen key (down) :**
 - Short press to make off -screen, or back to watch face.
 - Long press to power on/off.



- Screen Touch Gestures:**
 - Swipe left: to switch the watch faces.
 - Swipe right: to enter half screen home menu.
 - Swipe up: to enter message bar.
 - Swipe down: to enter shortcut setting menu

Main functions

- Calling pad:** Make a call on the watch side, in case audio Bluetooth point Hry 3.0 is connected with the phone.
- Contact:** After the contact from your smart phone successfully added to the watch via APP, the phone book of the watch will be displayed synchronously. Click the contact in the phone book on the watch to make a call
- Call record:** The call history of watch can be displayed, just click the phone number to dial directly.
- Notice:** For any call making action, the audio Bluetooth point Hry3.0 must be paired between the phone and watch.
- Messages:** The content of the message push can be displayed, such as: QQ, WeChat, etc. (The system above IOS12 will block SMS reminders by default).
- Notice :** When the watch has an incoming call, there is no notification reminder on QQ or WeChat, you need set the phone settings-"notification settings", to open the corresponding and notification application to receive information notification.
- Sports:**
 - Enter the sports mode (running, walking, cycling, climbing) selection. interface, click again to start the corresponding sport data monitoring, such as exercise time, distance, calories burned and heart rate data.
 - Record: record all exercise data
- Pedometer:** Calculate your step count data for the day, it will automatically clear the data at 00:00 in every morning, you can view the historical steps record in the APP.
- Sleep monitoring:** Turn on sleep detection to monitor the quality of sleep.
- Sedentary reminder:** Set the sedentary time, when the time is up, the watch will vibrate, and there will be a prompt remind on the interface too.
- Heart rate:** Put the watch close to your wrist, the real-time heart rate can be measured. Reference value is 60-100 beats/min.
- Blood pressure:** Put the watch close to your wrist, the real-time blood pressure can be measured. Reference value: adult diastolic blood pressure: 60~80 (mmHg) adult systolic blood pressure: 100~120 (mmHg).
- Blood oxygen monitoring:** The watch is tightly attached to the wrist, the real-time blood oxygen value can be measured. Reference value is 95% to 100%.
- NOTICE:** For health monitor including heart rate / Blood Pressure / Blood Oxygen, we strongly recommend to wear the watch on the wrist bone and above the arm.
- BT camera:** The camera app in the watch allows you to remotely take photos through your phone's camera.
 - Open the Hryfine app in your phone.
 - Open the BT camera menu in the watch, tap the screen or shake the watch to take photos from your phone remotely. You can view the photos in your phone.
- NOTICE:** Please make sure the watch has been successfully paired with your phone and Hryfine App, and keep your phone in the Hryfine App Screen.
- Bluetooth music:** Control the playback of music in the phone. When the "Hry3.0" blue point is connected, the watch could also play music via its built-in speaker.
- Find the phone:** Long press the icon on the watch, the Bluetooth connected mobile phone will ring.
- Weather:** Display the weather conditions and temperature in the current day.
- Stopwatch:** start stopwatch timing and end timing.
- Alarm bell:** When set a custom alarm clock on the APP, the watch will vibrate to remind you when time up.
- Style:** You can set and change the UI style.
- About:** Display the MAC serial code, Bluetooth name, and version number of the watch.
- Brightness:** can adjust the brightness of screen by swiping the +/- bar.
- QR code:** Scan the built in QR code to download associated APP to your smartphone and bind the watch.
- Reset:** Let your device reset and clear data, such as pedometer record and messages, etc.
- Torch:** Turn on the function, the screen of the watch will light up in white for long time as a Torch.
- Calculator:** easy to make calculation by the watch
- Siri:** to enable Siri voice control in your phone.
- Password lock:** four-digit password can be set to unlock the dial
- Time setting:** Time can be set manually.
- Do Not Disturb mode:** You can set the Do Not Disturb time period in the APP, and you will not receive any message prompt, after it is turned on
- Settings:** make various settings for the watch, you can also swipe the screen to enter setting short cut menu.
- Raise your hand to brighten the screen:** When you wear the watch, the screen will light up when you raise your wrist.
- Changing watch face on the smart watch :** You can change by below methods:
 - Turn the rotary key on the watch to navigate through the watch face pictures, select your desired picture the change as you like.
 - Open the Hryfine App=>Dail menu, select your desired pictures and install to change the watch face in the smart watch.
- Language:**
 - For watch: You can manually set from the language bar in the watch, or u can set by Hryfine App - language setting. Multi-language choices for you.
 - For APP : You must adjust as per your phone setting.

- Bluetooth Earbuds -

Basic Features

- Bluetooth Signal distance: ≥10 meters (without any large obstacles in an ideal environment)
- Battery specifications: headset 3.7V/35mA,charging base 3.7V/200mA
- Music Play time: about3.5 hours
- Talk time: about 3.5hours
- Charging time: For the charging base about 1.5 hours, For the headset about 1 hour

Key Operating instructions

- Power on: take out the headset from the charging base, it will turn on automatically.
- Power off: put the headset into the charging base, it will power off automatically.
- Previous song: double-click the left headset
- Next song: double-click the right headset
- Volume plus: three strikes on the left headset
- Volume reduction: three strikes in the right headset
- Pause/Play: Click once the left headset or the right one.
- When call comes in, answer/hang up: Click once the left or the right headset to answer/hang up the phone
- Reject the call: Long press the left or the right headset arbitrarily for 1 second.
- Siri: Press the left or the right headset for 3 Seconds.
- Bluetooth pairing: the main and auxiliary machines are automatically paired after starting.
- Bluetooth connection: Open the Bluetooth device (phone, tablet, etc.), find the Bluetooth pairing name "IK-EBW24", and click to connect. After successful connection, the light on the headset will disappear.

ATTNTION:

- When the charging base fully charged, please disconnect it from the charging cable, to avoid damage caused by charging compartment.
- When plays music, please adjust the music to the appropriate volume, in order to avoid noise harm to your ears.
- Do not use this product in places with interference sources. Otherwise, it may affect the Bluetooth signal.
- Do not use this product in corrosive environment to avoid affection to the functions.

- Power Bank -

Li-Polymer Battery: 3.7V, 5000mAh, 18.5Wh
USB-C Input: DC 5V 3A, 9V 2.2A, 12V 1.67A
USB-C Output: DC 5V 3A, 9V 2.2A, 12V 1.67A
Wireless Output: 15W Max.
USB-C Output + Wireless Output: 15W Max.
Max. Output: 20W


- Type-C Cable -

Type-C+Type-C / 100cm length / Fast charging


مجموعة الساعة الذكية دليل الاستخدام




ساعة ذكية ٢,٠١ بوصة تعمل باللمس
بالكامل
مكاملة بلوتوث/شحن لاسلكي




سماعات بلوتوث
أسلوب OWS، الضوابط التي تعمل
باللمس



أداة للشحن
٥٠٠٠ مللي أمبير



كابل الشحن
النوع-C + النوع-C بطول ١٠٠ سم /

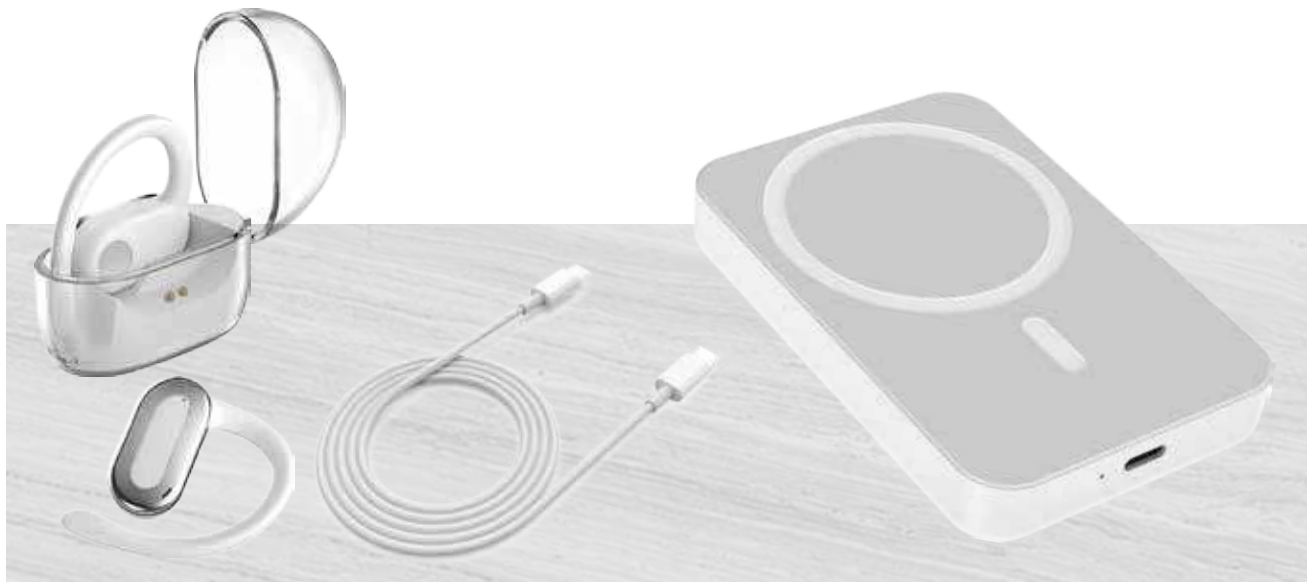

- الساعة الذكية -

التكيف مع متطلبات المنصة:

أندرويد ٥.٠ وما فوق على الهواتف
IOS 9.0 وما فوق على
الهواتف المحمولة

دعم بلوتوث BT 3.0


طريقة تحميل التطبيق:



- مستخدمو هواتف LOS/Android: امسح رمز QR أعلاه لتنزيل التطبيق وتثبيته.
- أندرويد: ابحث عن "HryFine" من خلال متجر التطبيقات البرمجية لتنزيل التطبيق وتثبيته.
- آبل: ابحث عن "HryFine" من خلال متجر التطبيقات لتنزيل التطبيق وتثبيته.
- وي شات: اتبع الحساب الرسمي "Deer Enjoy Planet"، يمكنك الحصول على رابط التنزيل للتنزيل على الحساب الرسمي.

الاستخدام الأولي

- لضمان الاستخدام الطبيعي للساعة الذكية، يرجى شحنها أولاً.
- قبل الشحن، تأكد من أن وعاء الشحن نظيف وجاف.
- قد يؤدي استخدام شواحن الشركات الأخرى إلى بطء الشحن و
- الخطوة ١: ضع جهة اتصال الشحن الخاصة بالساعة الذكية على قاعدة شحن USB (الجانب المقعر)
- الخطوة ٢: قم بتوصيل طرف USB الخاص بكابل الشحن بمصدر طاقة USB.
- عند التوصيل بنجاح، سترى مؤشر الشحن على شاشة الساعة.



وقت الشحن: يستغرق شحن ساعتك الذكية بالكامل حوالي ٢,٥ ساعة. قم بإزالة الساعة بمجرد شحنها بالكامل.
• تحذير: لا تضع المعدن بين الساعة الذكية ووعاء الشحن، بما في ذلك، على سبيل المثال لا الحصر، الأقراص المعدنية للحوامل المغناطيسية والمغناطيس وحلقات قبضة الهاتف والمفاتيح/حلقات المفاتيح والعملات المعدنية ومشابك الورق.

الاقتران بين الساعة + التطبيق + الهواتف الذكية

يجب توصيل الساعة والهاتف الذكي عبر البلوتوث، بعد تنزيل تطبيق Hryfine على الهاتف، لضمان أداء جميع الوظائف.

- الاقتران بين الهاتف الذكي والساعة عبر التطبيق: بعد تشغيل قائمة إعدادات Bluetooth على هاتفك الذكي، قم بتنشيط APP Hryfine، وسيندرك بتمكين نقطة الإشعار للتأكيد. انقر لإضافة جهاز، وابحث عن اسم الجهاز "IK-WS28".
- انقر فوق "اتصال" "Connect" لإقران جهاز الساعة.
- قم بتوصيل Bluetooth 3.0 BT لتشغيل الصوت: أدخل محطة Bluetooth الخاصة بالهاتف المحمول وابحث عن نقطة Bluetooth أخرى "Hry3.0" في حالة احتياجك إلى بث صوتي عبر الساعة بما في ذلك المكالمات وتشغيل الموسيقى.
- كيفية التحقق من نجاح اتصال البلوتوث: تشير أيقونة البلوتوث في القائمة الرئيسية للساعة إلى حالة اتصال البلوتوث. كما يمكنك النقر فوق "العثور على الهاتف" (find the phone) أو الدخول إلى التطبيق "العثور على الساعة". إذا كان هناك اهتزاز بالساعة أو تحذير من الهاتف، فهذا يعني أن كلا الجهازين متصلان بنجاح عبر التطبيق.

تعليمات التشغيل للمفاتيح والشاشة:

- المفتاح الدوار (لأعلى):
- ١. قم بالتدوير لتبديل وجوه الساعة
- ٢. قم بالتدوير لتبديل عناصر القائمة الرئيسية
- ٣. اضغط لفترة قصيرة للدخول إلى القائمة الرئيسية
- مفتاح الطاقة / إيقاف تشغيل الشاشة (لأسفل):
- ١. اضغط لفترة قصيرة لجعله خارج الشاشة، أو للرجوع لمشاهدة الوجه.
- ٢. اضغط لفترة طويلة لتشغيل/إيقاف التشغيل.



- إماءات لمس الشاشة:
- ١. اسحب لليسار: لتبديل وجوه الساعة.
- ٢. اسحب لليمين: للدخول إلى القائمة الرئيسية بنصف الشاشة.
- ٣. اسحب لأعلى: للدخول إلى شريط الرسائل.
- ٤. اسحب لأسفل: للدخول إلى قائمة إعداد الاختصارات

الوظائف الرئيسية

- لوحة الاتصال: قم بإجراء مكالمة على جانب الساعة، في حالة توصيل نقطة Bluetooth الصوتية Hry 3.0 بالهاتف.
- الاتصال: بعد إضافة جهة الاتصال من هاتفك الذكي بنجاح إلى الساعة عبر التطبيق، سيتم عرض دليل الهاتف الخاص بالساعة بشكل متزامن. انقر فوق جهة الاتصال الموجودة في دليل الهاتف على الساعة لإجراء مكالمة
- سجل المكالمات: يمكن عرض سجل المكالمات الخاص بالساعة، فقط انقر فوق رقم الهاتف للاتصال مباشرة.

ملحوظة: لإجراء أي مكالمة، يجب إقران نقطة Bluetooth الصوتية Hry3.0 بين الهاتف والساعة.

- الرسائل: يمكن عرض محتوى دفعة الرسالة، مثل: QQ و WeChat وما إلى ذلك (النظام الموجود فوق IOS12 سيحظر تنذيرات الرسائل القصيرة بشكل افتراضي).
- ملحوظة: عندما تحتوي الساعة على مكالمة واردة، لا يوجد تذكير بالإشعارات على QQ أو WeChat. تحتاج إلى ضبط إعدادات الهاتف - "إعدادات الإشعارات"، لفتح التطبيق المقابل وتطبيق الإشعارات لتلقي إشعار المعلومات.
- الرياضة:

١. الدخول إلى اختيار الوضع الرياضي (الجري، والمشي، وركوب الدراجات، التسلق). الواجهة، انقر مرة أخرى لبدء مراقبة البيانات الرياضية المقابلة، مثل وقت التمرين والمسافة والسرعات الحرارية المحروقة وبيانات معدل ضربات القلب.
٢. السجل: سجل جميع بيانات التمرين
- عداد الخطئ: احسب بيانات عدد خطواتك لهذا اليوم، وسوف يقوم بسحب البيانات تلقائيًا في الساعة ٠٠:٠٠ كل صباح، ويمكنك عرض سجل الخطوات التاريخية في التطبيق.
- مراقبة النوم: قم بتشغيل اكتشاف النوم لمراقبة جودة النوم.
- تذكير الجلوس: اضبط وقت الجلوس، وعندما ينتهي الوقت، ستهتز الساعة، وسيكون هناك تذكير سريع على الواجهة أيضًا.
- معدل ضربات القلب: ضع الساعة بالقرب من معصمك، ويمكن قياس معدل ضربات القلب في الوقت الحقيقي. القيمة المرجعية هي ٦٠-١٠٠ نبضة/دقيقة.

- ضغط الدم: ضع الساعة بالقرب من معصمك، ويمكن قياس ضغط الدم في الوقت الحقيقي. القيمة المرجعية:

ضغط الدم الانبساطي عند البالغين: ٦٠ ~ ٨٠ (مم زئبق) ضغط الدم الانقباضي للبالغين: ١٠٠ ~ ١٢٠ (مم زئبق).

- مراقبة نسية الأكسجين في الدم: الساعة متصلة بإحكام بالمعصم؛ يمكن قياس قيمة الأكسجين في الدم في الوقت الحقيقي. القيمة المرجعية هي ٩٥% إلى ١٠٠%.

تنبيه: بالنسبة لمراقبة الصحة بما في ذلك معدل ضربات القلب / ضغط الدم / الأكسجين في الدم، نوصي بشدة بارتداء الساعة على عظمة المعصم وفوق الذراع.

• كاميرا BT: يتيح لك تطبيق الكاميرا الموجود في الساعة التقاط

الصور عن بعد من خلال كاميرا هاتفك.

١. افتح تطبيق Hryfine على هاتفك.
٢. افتح قائمة كاميرا BT في الساعة، وانقر على الشاشة أو قم بهز الساعة لالتقاط الصور من هاتفك عن بعد. يمكنك عرض الصور في هاتفك.

تنبيه: يرجى التأكد من أن الساعة قد تم إقرانها بنجاح مع هاتفك وتطبيق Hryfine، واحتفظ بهاتفك في شاشة تطبيق Hryfine.

- موسيقى بلوتوث: التحكم في تشغيل الموسيقى في الهاتف. عند توصيل النقطة الزرقاء Hry3.0، يمكن للساعة أيضًا تشغيل الموسيقى عبر مكر الصوت المدمج.
- ابحث عن الهاتف: اضغط لفترة طويلة على الأيقونة الموجودة على الساعة، وسيرن الهاتف المحمول المتصل بالبلوتوث.
- الطقس: عرض الظروف الجوية ودرجة الحرارة في اليوم الحالي.
- ساعة الإيقاف: بدء توقيت ساعة الإيقاف وتوقيت الانتهاء.
- جرس الإنذار: عند ضبط منبه مخصص على التطبيق، ستهتز الساعة لتذكيرك عند انتهاء الوقت.
- النمط: يمكنك ضبط وتغيير نمط واجهة المستخدم.
- حول: اعرض الرمز التسلسلي لـ MAC واسم Bluetooth ورقم إصدار الساعة.
- السطوع: يمكن ضبط سطوع الشاشة عن طريق تمرير الشريط +/-

- رمز الاستجابة السريعة: قم بلمس رمز الاستجابة السريعة المدمج لتنزيل التطبيق المرتبط على هاتفك الذكي وربط الساعة.
- إعادة الضغط: اسمح لجهازك بإعادة ضبط البيانات ومسحها، مثل سجل عداد الخطى والرسائل، وما إلى ذلك.
- الكشف: قم بتشغيل الوظيفة، وستضيء شاشة الساعة باللون الأبيض لفترة طويلة ككشف.

- الآلة الحاسبة: من السهل إجراء العمليات الحسابية بواسطة الساعة سييري: لتمكين التحكم الصوتي سييري في هاتفك.
- قفل كلمة المرور: يمكن ضبط كلمة مرور مكونة من أربعة أرقام لفتح القرض

- ضبط الوقت: يمكن ضبط الوقت يدويًا.
- وضع عدم الإزعاج: يمكنك ضبط الفترة الزمنية لعدم الإزعاج في التطبيق، ولن تتلقى أي رسالة مطلوبة، بعد تشغيله
- الإعدادات: قم بضبط إعدادات مختلفة للساعة، ويمكنك أيضًا تمرير الشاشة للدخول إلى قائمة الإعدادات المختصرة.
- ارفع يدك لإضاءة الشاشة: عندما ترتدي الساعة، ستضيء الشاشة عندما ترفع معصمك.
- تغيير وجه الساعة على الساعة الذكية: يمكنك التغيير بالطرق التالية:

١. قم بتشغيل المفتاح الدوار على الساعة للتنقل عبر صور وجه الساعة، ثم حدد الصورة التي تريدها وقم بالتغيير كما تريد.
٢. افتح تطبيق Hryfine= قائمة Dail، وحدد الصور التي تريدها وقم بتثبيتها لتغيير وجه الساعة في الساعة الذكية.

- اللغة:
- ١. للمشاهدة: يمكنك الضبط يدويًا من شريط اللغة في الساعة، أو يمكنك الضبط من خلال تطبيق Hryfine - إعداد اللغة. خيارات متعددة اللغات بالنسبة لك.
- ٢. للتطبيق: يجب عليك الضبط حسب إعدادات هاتفك.

- سماعات بلوتوث -

- الميزات الأساسية
- مسافة إشارة البلوتوث: > ١٠ أمتار (دون أي عوائق كبيرة في بيئة مثالية)
- مواصفات البطارية: سماعة الرأس ٣,٧ فولت/٣٥ مللي أمبير، قاعدة شحن ٣,٧ فولت/٢٠٠ مللي أمبير
- وقت تشغيل الموسيقى: حوالي ٣,٥ ساعة
- وقت التحدث: حوالي ٣,٥ ساعة
- وقت الشحن: لقاعدة الشحن حوالي ١,٥ ساعة، ولسماعة الرأس حوالي ١ ساعة

تعليمات التشغيل الرئيسية

١. التشغيل: أخرج سماعة الرأس من قاعدة الشحن، وسيتم تشغيلها تلقائيًا.
٢. إيقاف التشغيل: ضع سماعة الرأس في قاعدة الشحن، وسيتم إيقاف تشغيلها تلقائيًا.
٣. الأغنية السابقة: انقر نقرًا مزدوجًا فوق سماعة الرأس اليسرى
٤. الأغنية التالية: انقر نقرًا مزدوجًا فوق سماعة الرأس اليمنى
٥. رفع الصوت: ثلاث ضربات على السماعة اليسرى
٦. خفض الصوت: ثلاث ضربات في سماعة الرأس اليمنى
٧. إيقاف مؤقت/تشغيل: انقر مرة واحدة على سماعة الرأس اليسرى أو سماعة الرأس اليمنى.
٨. عند ورود مكالمة، قم بالرد/أغلق الخط: انقر مرة واحدة على سماعة الرأس اليسرى أو اليمنى للرد على/تعليق الهاتف
٩. رفض المكالمة: اضغط مطولاً على سماعة الرأس اليسرى أو اليمنى بشكل عشوائي لمدة ثانية واحدة.
١٠. سييري: اضغط على سماعة الرأس اليسرى أو اليمنى لمدة ٣ ثوان.
١١. اقتران البلوتوث: يتم إقران الأجهزة الرئيسية والمساعدة تلقائيًا بعد البدء.
١٢. اتصال البلوتوث: افتح جهاز البلوتوث (الهاتف، الجهاز اللوحي، إلخ)، وابحث عن اسم اقتران البلوتوث "IK-EBW24"، وانقر للاتصال. بعد الاتصال الناجح، سيخفي الضوء الموجود على سماعة الرأس.

تنبيه:

١. عندما تكون قاعدة الشحن مشحونة بالكامل، يرجى فصلها عن كابل الشحن، لتجنب الضرر الناتج عن حجرة الشحن.
٢. عند تشغيل الموسيقى، يرجى ضبط الموسيقى على مستوى الصوت المناسب، لتجنب ضرر الضوضاء لأذنيك.
٣. لا تستخدم هذا المنتج في الأماكن التي بها مصادر متداخلة. وإلا فقد يؤثر ذلك على إشارة البلوتوث.
٤. لا تستخدم هذا المنتج في بيئة مساعدة على التآكل لتجنب التأثير على الوظائف.

- بنك الطاقة -

بطارية ليثيوم بوليمر ٣,٧ فولت، ٥٠٠٠ مللي أمبير، ١٨,٥ وات في الساعة تيار مستمر ٥ فولت ٣ أمبير، ٩ فولت ٢,٢ أمبير، ١٢ فولت ١,٦٧ أمبير تيار مستمر ٥ فولت ٣ أمبير، ٩ فولت ٢,٢ أمبير، ١٢ فولت ١,٦٧ أمبير ١٥ واط كحد أقصى.

مخرج USB-C + مخرج لاسلكي: ١٥ واط كحد أقصى.

المخرج الأقصى: ٢٠ واط

- كابل من النوع - C

النوع-C+النوع-C، طول ١٠٠ سم / شحن سريع