

MAP-36310

USER MANUAL

for WiFi connection

WIFI INSTRUCTIONS MANUAL



BFFORF YOU START

- Ensure your router provides a standard 2.4ghz connection.
- If your router is dual band ensure that both networks have different network names (SSID).

 The provider of your router / ISP will be able to provide advice specific to your router.
- Place the air purifier as close as possible to the router during setup.
- Once the app has been installed on your phone, turn off the data connection, and ensure your phone is connected to your router via wifi.

DOWNLOAD THE APP TO YOUR PHONE


Download the "TUYA SMART LIFE" app, from your chosen app store. Alternatively, you could also download the "TUYA Smart" app which is also compatible, but has some slight differences in the layout.


REMARK: Alternatively, you can use the TUYA Smart application, which has a similar layout and functions

REGISTER THE APP

- 1. Click on the register button at the bottom of the screen
- 2. Click "Agree" to the

"Privacy Policy".

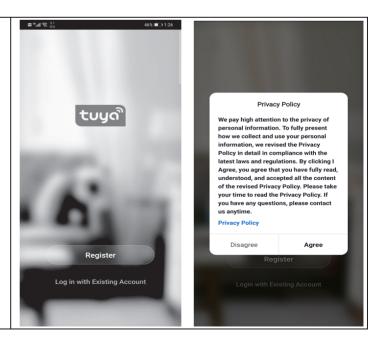

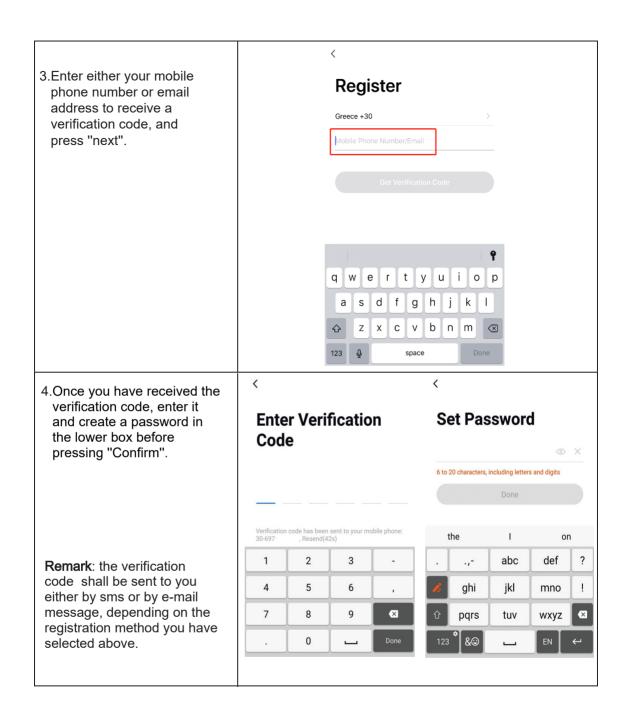

CONNECTION METHODS AVAILABLE FOR SETUP

This smart device has two different setup modes:

"Add Manually" and

"Search by Device"

Before starting the setup, please ensure that your air purifier is placed as close as possible to your WiFi-router.

ENTERING CONNECTION MODE To enter connection mode on your air purifier, press and hold 'Mode' button for 5" until the 2 lights of 'Auto' and 'Silent' start flashing rapidly. You will hear a sound.

CONNECTING THROUGH THE "ADD MANUALLY" TAB

Before initiating the connection, make sure the WiFi is ON and that the relative indication is flashing. If not, press again and keep pressed for 5 seconds the 'Mode' button, while also ensure your phone is connected to the wifi network.

1. Open app and click "+" to "Add

Device".

No devices, please add

Add Device

Smatt

Me

2. Tap on the top left the "Add


Manually" option. On the left side scroll down to "Small Home Appliances". Select the type of device as "Air Purifier".


Turn on the air purifier and press "MODE" for 5 seconds to enter the distribution network mode. Within five seconds you will see the 2 lights 'Auto' & 'Silent' on the front panel flashing rapidly.

3. Ensure the 2 lights on the


'Mode' button of air purifier are flashing rapidly (if not, turn off the air purifier, turn it on again and hold the 'Mode' button for 5 seconds until the 2 lights ('Auto' & 'Silent') on the front panel start flashing rapidly.

Then press the button at the bottom of the screen to confirm).

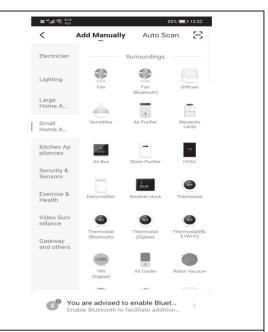

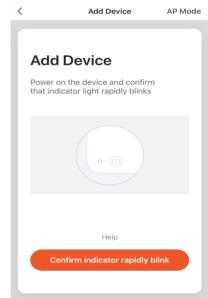

 Select your home network, enter your WiFi password and click "Confirm".

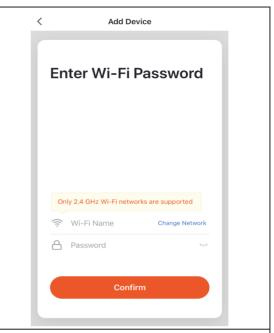


5. This will then transfer the settings to the air purifier.

Wait until the connection has been completed succesfully. If the connection fails, retry. If the connection is still failing please review the "Troubleshooting" section for further help.


Once the connection has been completed, your device will appear on the screen.

Press DONE button to complete the process.

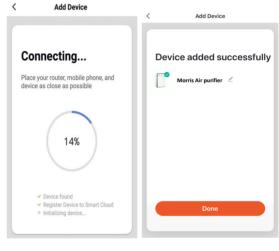

CONNECTING USING THE "SEARCH FOR DEVICE" TAB

Before initiating the connection, make sure the unit is switched on, with the connection lights (flashing. If not, press the 'Mode' button again and keep it pressed for 5 seconds, while also ensure that your phone is connected to the wifi network.

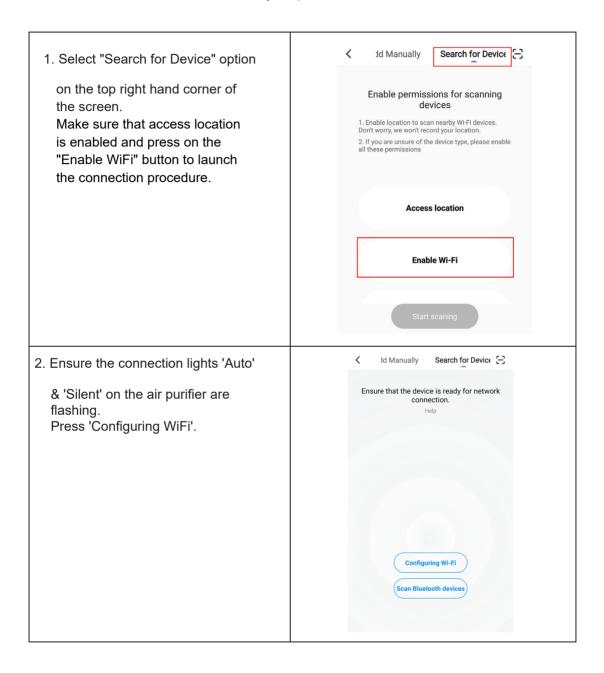

3. You should be seeing the name of your home network, to which your mobile device should already be connected as well. Enter the password in the relative field and press "Confirm".


Important: Only 2.4GHz Wi-Fi networks are supported.



4. The searching of the device will start.

If searching fails, retry.

If the connection is still failing, review the "Troubleshooting" section for help.

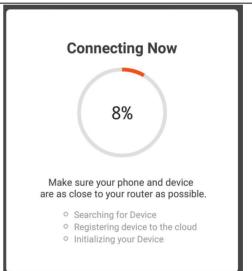

5. Once the searching is completed, you should see the air purifier found and appearing as an "Available device found". Press the "Next" button on the bottom to complete the linking.



DEVICE CONTROL ENVIRONMENT




Now that your air purifier is linked up to your

network, you can control it from your phone. Press 'Switch' button to turn your device on and off.


Press 'Mode' button to set air purifier working at 'Manual', 'Auto' or 'Mute' mode.

Press 'Wind/Speed' button to set speed of the device - Level 1 (Silent), Level 2 (Low), Level 3 (Middle), Level 4 (High).

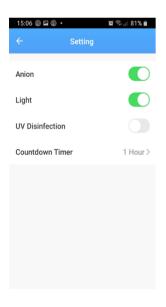

Press 'Setting' to activate or de-activate Anion, Lights, UV Disinfection and Timer functions.





Press 'Countdown Timer' button to choose the time you wish to activate / de-activate the device.

Choose to repeat the settings for specific time (1, 4, 8 hours) or cancel the setting.

TROUBLESHOOTING

- 1. Check whether the device is powered on and is in the correct standby mode, if not, please refer to the changing between connection types section.
- 2. Ensure the WiFi password has been entered into the app correctly (Case sensitive).
- 3. Check that the phone is connected to the WiFi you are connecting the device to.
- 4. Ensure the network you are connecting it to is 2.4Ghz (5Ghz wifi networks are not supported), and that there is a strong WiFi signal to the item.
- 5. Check the settings on the router. Encryption should be WPA2-PSK and authorisation type should be set to AES.
- 6. If you are unable to connect through the quick connection method, please try following the guide for connecting the AP Mode.

DISCLAIMER:

All above instructions and illustrations are offered based upon the layout of TUYA's Smart Life application at the date of publishing.

Actual layout of the application, its graphics, or exact menus at the time of installation may differ.

This is the result of the applications constant updating so as to improve the user experience, resolve potential bugs, or even add more features.

In case of any difficulty, please check our web-page for an updated version, or contact our after sales department.

