

VB400 14-PORT DOCK

Host multiple VB400 cameras
for simultaneous rapid charging,
configuration and video downloading.



GENERAL INFORMATION


Product Code	VB-400-DOCK-14/UK, VB-400-DOCK-14/EU, VB-400-DOCK-14/US, VB-400-DOCK-14/AUS, VB-400-DOCK-14/ROW
Hosts Multiple VB400s	14 VB400 camera ports
Scalability	Multiple docking stations can be connected to a DockController
Compatibility	Compatible with DockController DC-200
Easy To Deploy	Connection is a single USB to the DockController, and a mains adaptor for power - USB cable supplied
	Eliminates need for separate wiring to each camera
Speedy Plug-in / Pull-out Connectivity	VB400 cameras can be easily docked or undocked for speedy use
Flexible Docking	Flexible for use with camera accessories attached. Can be securely fastened to a shelf or other mounting surface - can be secured at an angle
Warranty	1 year manufacturer's warranty
	Extended warranty available

SIZE AND WEIGHT

Dimensions	200mm x 38mm x 436mm
Weight	2.2kg (3.5kg boxed)

CHARGING, POWER & INTERFACE

Charging	Up to 8 hrs from a fully flat VB400 battery.
Power Requirement	12V/5A PSU, input 100-240V (PSU supplied).
Interface	USB 2.0 compatible
	USB 3.0 compatible

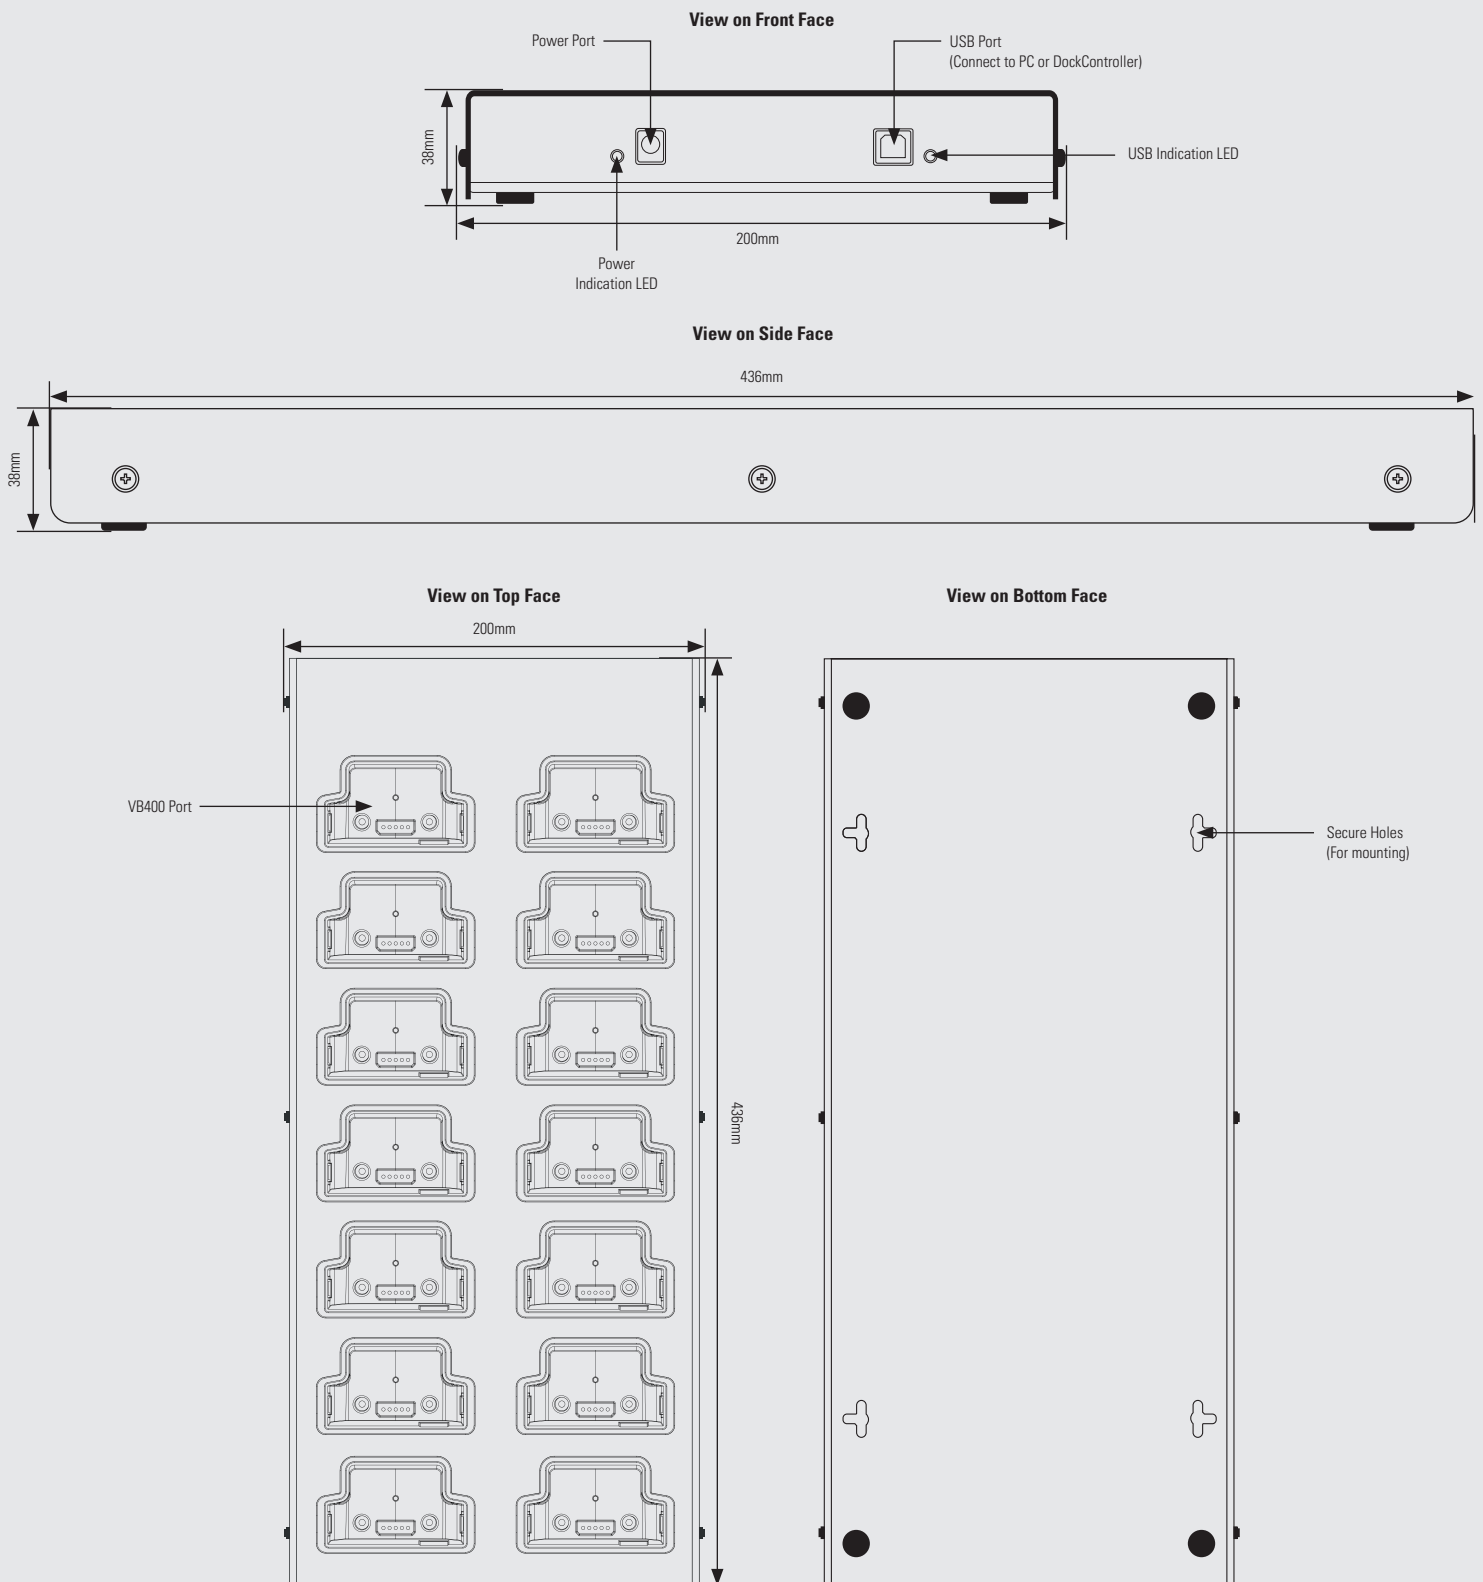

For more information, please visit: www.motorolasolutions.com/BWC

Motorola Solutions Australia Pty Ltd

Availability is subject to individual country law and regulations. All specifications shown are typical unless otherwise stated and are subject to change without notice. MOTOROLA, MOTO, MOTOROLA SOLUTIONS and the Stylized M Logo are trademarks or registered trademarks of Motorola Trademark Holdings, LLC and are used under license. All other trademarks are the property of their respective owners.
© 2020 Motorola Solutions, Inc. All rights reserved. (09/20) (ED-002-048-09-AUS)