VEVOR® TOUGH TOOLS, HALF PRICE

Technical Support and E-Warranty Certificate www.vevor.com/support

COIN SORTER USER MANUAL

MODEL NO.: KSW550-1

We continue to be committed to provide you tools with competitive price.

"Save Half", "Half Price" or any other similar expressions used by us only represents an estimate of savings you might benefit from buying certain tools with us compared to the major top brands and does not necessarily mean to cover all categories of tools offered by us. You are kindly reminded to verify carefully when you are placing an order with us if you are actually Saving Half in comparison with the top major brands.





Coin Sorter

MODEL NO.: KSW550-1



NEED HELP? CONTACT US!

Have product questions? Need technical support? Please feel free to contact us:

Technical Support and E-Warranty Certificate www.vevor.com/support

This is the original instruction, please read all manual instructions carefully before operating. VEVOR reserves a clear interpretation of our user manual. The appearance of the product shall be subject to the product you received. Please forgive us that we won't inform you again if there are any technology or software updates on our product.

WARNING:

Please read this manual carefully before using the product. Failure to do so may result in serious injury.

For your safety, it is very important that you always follow the simple Precautions as below:


- Do not operate the machine if you, or it, are damp. Operating the machine under wet, damp conditions can lead to an electrical shock hazard that might result in serious injury.
- -Use only the same type and rating when replacing a fuse. Using an incorrect Fuse can cause a potential fire hazard if a higher rating Fuse is used.
- -Ensure that both the machine and the domestic mains supply system are of the same voltage. An in correct supply voltage could cause a potential fire hazard.
- -Turn off and unplug the power before performing maintenance.
- -Do not start the machine when the back cover is open.
- -Do not put your fingers inside the hopper or channel when the machine is under operation.
- -Turn off and unplug the power not in use for a long time.
- -Should you have any doubts, please contact your local distributor, or sales agent, for further advice.

TECHNICAL SPECIFICATIONS

Model	KSW550-1
Rating(s)	AC220-240V,50Hz, 20W
Product Dimensions (LxWxH)(mm)	330*300*260
Net Weight(kg)	About 3.8

^{*}Products such as specifications, appearance, and design are subject to modification without prior notice.

MACHINE OVERVIEM

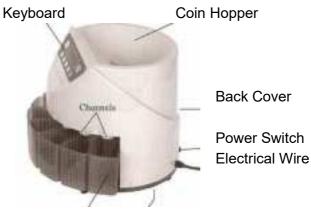

Coin Drawer Fuse(at the bottom)

OPERATION

- 1. Make sure that the machine is put on level and then turn on the machine.
- 2.Set an expected batch.

Each channel can be set an expected batch (from 0 to 999).

Press the "**SET**" key to select the channel, and the "**BAT**" key, "+" key and "-" key to set the expected batch number.

Note 1: If some channels set the batch to 0, the machine will not stop this channel even the drawer is full, unless the "**START/STOP**" key is pressed or no coin drop though the channel within 20 seconds.

Note 2: Keep "-" key pressed in 7 seconds can set all the channels to batch 0.

Note 3: The batch setting can be automatically memorized.

3.Start counting

Put coins in the hopper, and press the "START/STOP" key to start counting.

Press the "START/STOP" again to stop the counting.

4. Check the report

Press the "**REPORT**" key circularly when the machine in standby state can check the counting results of each channel. Press the "**C**" key can exit this checking procedure.

MAINTENANCE

WARNING!

TURN OFF THE MACHINE AND UNPLUG THE POWER BEFORR THE FOLLOWING MAITANENANCE!

1. Foreign object falls into the hopper will cause jamming or even damage the machine! Please do avoid the foreign object falling in.

As following shown, to remove the foreign object, just open the back Cover and pick out the foreign object.




2.To remove the coin jamming, as the following pictures show, use a finger to push up the jammed coin and let it fall out from the gap between the channels.



3.If the machine is switched on, the electron undergoes a test itself. It may result in one of the following error messages:

EA: Means the optical sensor is blocked: stop the machine and remove the back cover, then turn the carry tray by your hands, by outer light you see the glass which on top left corner, then clear the dust on the glass. Because there is too much dust on the glass and it affects the optical sensor work.

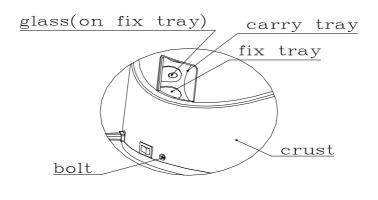

CLEAN GLASS

If the machine often appears EA, it may be due to working environment leading too much dust in the inner of the machine, to clean the inner parts

of the machine. a: switch off the machine and cut down power. b: remove 3 bolts on bottom of crust, remove the crust. c: clean dust, end to reset.

E1...E8 Means count sensor blocked.(According to the coin diameter from short to long range)

E9 Means the running sensor is blocked.

If it takes no effect after cleaning the inner parts as well as sensors, the machine needs repaired.

Correct Disposal



This product is subject to the provision of european Directive 2012/19/EU. The symbol showing a wheelie bin crossed through indicates that the product requires separate refuse collection in the European Union. This applies to the product and all accessories marked with this symbol. Products marked

as such may not be discarded with normal domestic waste, but must be taken to acollection point for recycling electrical and electronic devices.

Manufacturer: Shanghaimuxinmuyeyouxiangongsi

Address: Shuangchenglu 803nong11hao1602A-1609shi, baoshanqu,

shanghai 200000 CN.

Imported to AUS: SIHAO PTY LTD. 1 ROKEVA STREETEASTWOOD

NSW 2122 Australia

Imported to USA: Sanven Technology Ltd. Suite 250, 9166 Anaheim

Place, Rancho Cucamonga, CA 91730

UK REP

YH CONSULTING LIMITED. C/O YH Consulting Limited Office 147, Centurion House, London Road, Staines-upon-Thames, Surrey, TW18 4AX

EC REP

E-CrossStu GmbH Mainzer Landstr.69, 60329 Frankfurt am Main.



Technical Support and E-Warranty Certificate www.vevor.com/support