



Ultrathin Keyboard Folio S310

for Samsung Galaxy Tab 3™ (10.1")




Setup Guide

Contents

English.3

www.logitech.com/support 17


Know your product

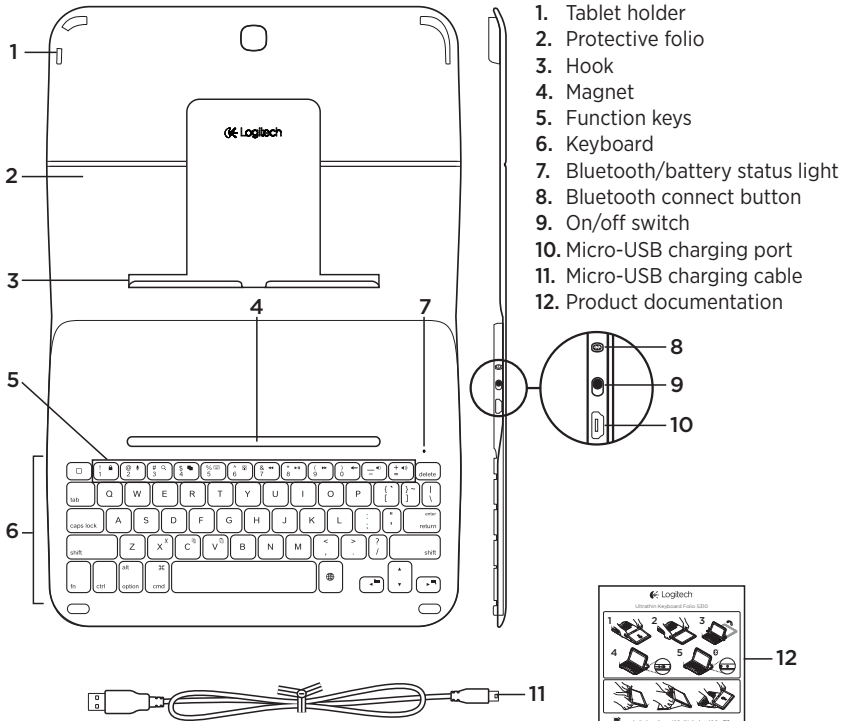


Setting up the keyboard folio

Getting started


1. Open the keyboard folio and push your Samsung Galaxy Tab 3 into the tablet holder:



2. Push your Samsung Galaxy Tab 3 down into the hook:



3. Move the keyboard folio into the typing position by lifting the back of the protective folio and sliding the hook forwards until it aligns with the magnet:



4. Establish Bluetooth connection with your Samsung Galaxy Tab 3. See "Using the Keyboard Plus app."

Using the Keyboard Plus app

You use the **Keyboard Plus** app when first setting up your keyboard folio, to establish Bluetooth connection with your Samsung Galaxy Tab 3 and configure the keyboard to get the best typing experience.

You can use the app at any point in the future if you experience issues, or want to change your settings.

The **Keyboard Plus** app is available on the Google Play™ Store.

To install the Keyboard Plus app:


1. From a Home screen, touch  **Apps** →  **Play Store**.
2. Touch  and search for 'Keyboard Plus'.
3. Select and install the app.

When the app is successfully installed it is displayed on the **Apps** screen as  **Keyboard Plus**.

To establish connection with your Samsung Galaxy Tab 3:


1. Launch the app. From a Home screen, touch  **Apps** →  **Keyboard Plus**.

You are prompted:




2. Touch **START** to start the Keyboard Setup Assistant which guides you through the connection process.
3. Turn on Bluetooth on your Samsung Galaxy Tab 3.

If Bluetooth is turned off you are prompted:




Touch **NEXT** to turn on Bluetooth.

4. Pair your Samsung Galaxy Tab 3 and keyboard folio. You are prompted:



To pair the devices:

- a. Touch **NEXT**. You are prompted:



- b. Turn on your keyboard (see “Using the keyboard folio”), and touch **NEXT**.


You are taken to the **Samsung Galaxy Tab 3 Settings** page.

The first time you turn on your keyboard the status light blinks blue to indicate that the keyboard is discoverable, ready for pairing with your Samsung Galaxy Tab 3. It remains discoverable for 15 minutes. If the status light doesn't blink blue, press the Bluetooth connect button.

- c. In the **Settings** page, touch **Keyboard Folio S310** from the list of ‘Available devices’. A PIN is displayed on screen.
- d. On the keyboard, enter the PIN and press **Enter**.

When successful connection is made the keyboard status light turns solid blue for a short time, and then off. The keyboard folio is now paired with your Samsung Galaxy Tab 3.

5. Enable the keyboard folio. You are prompted:




To enable the keyboard folio:

- a. Touch **NEXT**. You are prompted:




- b. Touch **NEXT**. You are taken to the Samsung Galaxy Tab 3 **Settings** page, “Language and input” section.

- c. Check “Ultrathin Keyboard Folio S310”:




The following note is displayed:



- d. Touch **OK** to close this note, and then press the  button on your Samsung Galaxy Tab 3 to return to the Keyboard Setup Assistant.

6. Set the keyboard folio as the default device for typing. You are prompted:




To set the keyboard folio as the default:

- a. Touch **NEXT**.
- b. Select “Ultrathin Keyboard Folio S310” as the default input method:




7. Set the keyboard language. You are prompted:



To set the keyboard language:

- a. Touch **NEXT**.
- b. Choose your language.


The setup process is now complete. You are prompted:



Touch **START** to start using your keyboard.

Resolving issues and changing settings

Having set up your keyboard folio, your keyboard works each time you turn it on. If you experience any issues, or want to change your settings, re-launch the app. The app opens on the **Status** page:

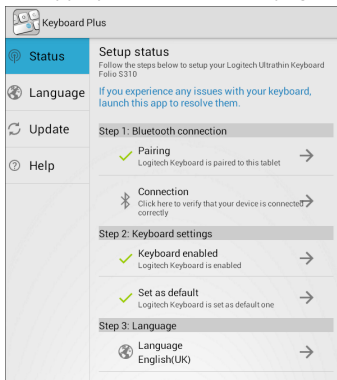

Any issues identified are denoted by a red cross.

To correct an issue or change a setting, touch the item and follow the instructions shown.


Using the keyboard folio

Two viewing positions

The keyboard folio provides two viewing positions—one for typing and another for browsing.

To type:

1. Move the Samsung Galaxy Tab 3 holder into the typing position, aligning it with the built-in magnet to secure it:




Typing position

If the status light turns red, charge the battery. For more information, see “Charging the keyboard battery.”

If you don’t use the keyboard for a while in the typing position, it enters sleep mode automatically. Pressing any key wakes it.


To browse, place the Samsung Galaxy Tab 3 holder in the browsing position:



Browsing position

You can switch off the keyboard if you want to conserve battery power.

2. Turn on the keyboard:

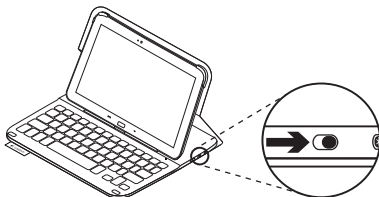

Status light indicators

Bluetooth and battery status light

Light	Description
Blinking green	The battery is charging.
Green	The battery is charged (more than 10%).
Red	Battery power is low (less than 10%). Recharge the battery.
Blinking blue	Fast: The keyboard is in discovery mode, ready for pairing. Slow: The keyboard is trying to reconnect to your Samsung Galaxy Tab 3.
Solid blue	Bluetooth pairing or reconnection is successful.

Function keys



Fn + Esc: Back



Fn + 1: Lock screen

Lock or unlock the tablet screen



Fn + 2: Search

Launch the tablet search function



Fn + 3: Web browser



Fn + 4: Mail



Fn + 5: Calendar



Fn + 6: Music



Fn + 7: Previous track



Fn + 8: Play/Pause



Fn + 9: Next track



Fn + 0: Mute



Fn + -: Volume down



Fn + =: Volume up



Fn + Backspace: Forward delete



Fn + X: Cut



Fn + C: Copy



Fn + V: Paste



Fn + Left cursor: Home



Fn + Right cursor: End



Fn + Up cursor: Page Up



Fn + Down cursor: Page Down



Fn + Right Alt: Android™ menu



Fn + Android home: Switch applications



Fn + spacebar: Switch language

Note:

- To select a function key, press and hold the Fn key, and then press the key indicated above.


Android keys

	 + E : Open or send email		 + B : Web browser
	 + P : Music player		 + M : Google Maps™
	 + A : Calculator		 + spacebar: Search
	 + L : Calendar		 + Esc : Return to Home screen
	 + C : Contacts (People)		

Notes:

- To select an Android key, press and hold the  key, and then press the key indicated above.
- Depending on your region, some Android keys may not work.

Charging the keyboard battery

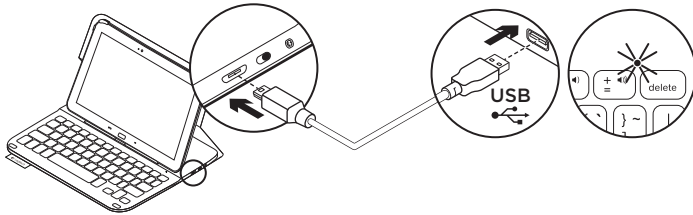

If the status light is red the keyboard folio battery needs to be charged.

1. Plug one end of the micro-USB cable into the charging port, and the other end into a USB port on your computer.


The status light blinks green as the battery charges.

2. Charge the battery until the status light turns solid green.

Battery information

- A fully charged battery provides about three months of use when the keyboard is used about two hours a day.
- Charge the battery if the status light turns red briefly after the keyboard turns on.
- When not in use, turn off the keyboard to conserve battery power.
- The keyboard enters sleep mode automatically if not used for a while in the typing position. Press any key to wake it.

Battery disposal at product end of life

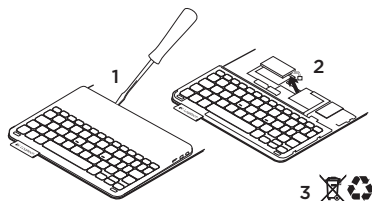


1. Pry off top cover of keyboard with screwdriver.
2. Detach battery from circuit board and remove battery.
3. Dispose of your product and its battery according to local laws.


When you've finished using the keyboard folio

Detaching your Samsung Galaxy Tab 3

1. Release your Samsung Galaxy Tab 3 from the hook:




2. Slide your Samsung Galaxy Tab 3 out of the tab holders:



Your Samsung Galaxy Tab 3 is then released.

Storing your Samsung Galaxy Tab 3 for travel

1. Insert your Samsung Galaxy Tab 3 in the tablet holder.
2. Close the keyboard folio:



Visit Product Central

There's more information and support online for your product. Take a moment to visit Product Central to learn more about your new keyboard folio.

www.logitech.com/support/ultrathin-keyboard-folio-s310

Browse online articles for setup help, usage tips, and information about additional features.

Connect with other users in our Community Forums to get advice, ask questions, and share solutions.

Find a wide selection of content including:

- Tutorials
- Troubleshooting
- Support community
- Online documentation
- Warranty information
- Spare parts (when available)

Troubleshooting

The keyboard does not work

- Press any key to wake the keyboard from sleep mode.
- Turn the keyboard off and then back on.
- Recharge the internal battery. For more information, see “Charging the keyboard battery.”
- Verify that Bluetooth is turned on in your Samsung Galaxy Tab 3's settings ( **Apps** →  **Settings** → **Wireless and networks** section → **Bluetooth**).
- Verify that “Ultrathin Keyboard Folio S310” is paired with your Samsung Galaxy Tab 3 ( **Apps** →  **Settings** → **Wireless and networks** section → **Bluetooth**).
- Re-establish Bluetooth connection between the keyboard and your Samsung Galaxy Tab 3 by selecting, or clicking on, “Ultrathin Keyboard Folio S310” in the devices list. The status light on your keyboard turns solid blue when Bluetooth connection is established.

www.logitech.com/support/ultrathin-keyboard-folio-s310



Australia

1-800-025-544

New Zealand

0800-447-361



www.logitech.com

© 2013 Logitech. All rights reserved. Logitech, the Logitech logo, and other Logitech marks are owned by Logitech and may be registered. Samsung, Galaxy and Tab are trademarks of Samsung Electronics Co., Ltd. Android, Google Play and Google Maps are trademarks of Google, Inc. All other trademarks are the property of their respective owners. Logitech assumes no responsibility for any errors that may appear in this manual. Information contained herein is subject to change without notice.

621-000223.002