




Wireless Video Transmission System ZOLink series

Item Model: ZO600S

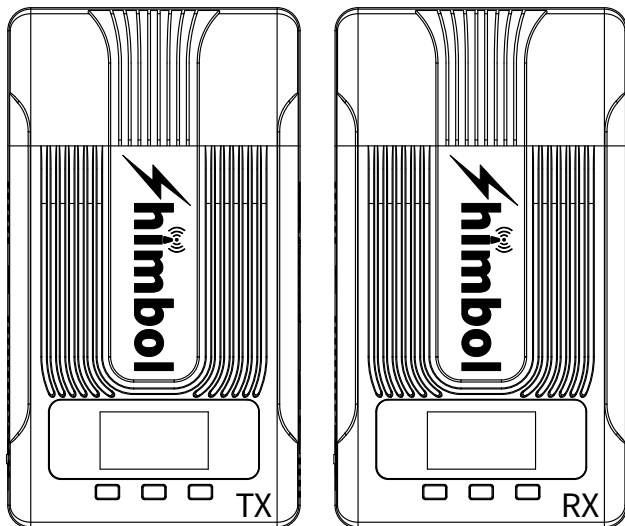


Manual

Shenzhen ZO Video Technology Co., Ltd.



01/Features



Transmit Range



Built-in antenna



80ms
Latency



Fanless
Ultra-low-power



App
Multiple monitoring




NPF/TYPE-C
Multiple power supply


02/Packing list

- 1 Transmitter*1
- 2 Receiver*1
- 3 User Manual*1
- 4 Type-c power cable*1

03/How to use

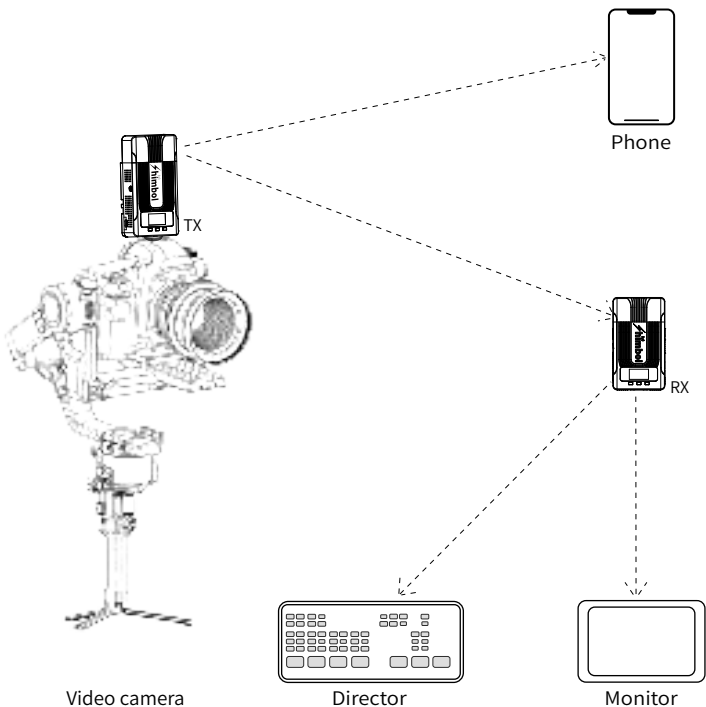

04/Product Description

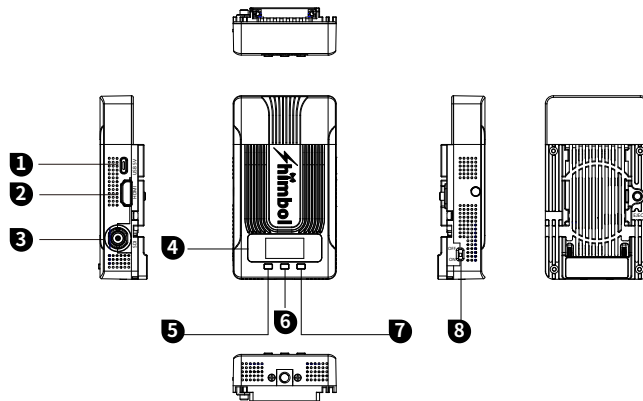

- 1** USB-C Port
- 2** HDMI Input(TX)/ Output(RX)
- 3** SDI Input(TX)/ Output(RX)
- 4** OLED Display screen
- 5** Direction button
- 6** Menu button
- 7** Direction button
- 8** Power switch

- A** Long press **5** Key for 3 seconds to enter the upgrade menu.
- B** Long press **6** Key for 3 seconds to enter into System Settings menu.
- C** Connecting to TX Device - Long press **7** Key for 3 seconds to show a connection QR code. Open mobile App to scan the Connection QR code.

05/Technical Parameters



	Transmitter	Receiver
Interface	HDMI Input/SDI Input	HDMI Output/SDI Output
Powered By	5V DC/NP-F Battery	5V DC/NP-F Battery
Power consumption	<5W	<4.5W
HDMI Input	720P@50/60Hz 1280*1024@60Hz 1080I@50/60Hz 1080P@24/25/30/50/60Hz	/
HDMI Output	/	720P@50/60Hz 1280*1024@60Hz 1080I@50/60Hz 1080P@24/25/30/50/60Hz
SDI Input	720P@50/60Hz 1080I@50/59.94/60Hz 1080P@23.98/24/25/29.97/30 50/59.94/60Hz 1080PSF23.98/24/25/29.97/30Hz	
SDI Output		720P@50/60Hz 1080I@50/60Hz 1080P@24/25/30/50/60Hz
Weight	160g	160g
Size	113*63.5*20.5mm	113*63.5*20.5mm
Transmission frequency band	5180-5240MHz,5745-5825MHz	
Transmit power	17dBmMAX	
Transmission delay	80ms, Noisy RF environment 120ms typical	
Receiving sensitivity	-80dBm	

Download “shimbol” APP on Apple App Store.

This product is for indoor or outdoor use.
This device is a non-handheld device, and the distance between the device and people is greater than 20cm during work.

FC CE 
Tel:+86 0755-21004986
URL:www.zeroone-video.com
Address:2C, 2nd Floor, Building 6, Longbi Industrial Park
No.27 Dafa Road, Bantian Street, Longgang District, Shenzhen
Shenzhen ZO Video Technology Co., Ltd.

FCC 15.105

FCC STATEMENT

1. This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:
- (1) This device may not cause harmful interference, and
 - (2) This device must accept any interference received, including interference that may cause undesired operation.
2. Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/ TV technician for help.

FCC Radiation Exposure Statement:

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. In order to avoid the possibility of exceeding the FCC radio frequency exposure limits, Human proximity to the antenna shall not be less than 20cm (8 inches) during normal operation