

H5194英文说明书

版本：1.0

料号：新建料号

成型尺寸：70×100 (mm)

材质：80G书页纸

印刷：单黑

工艺：157G双铜(封面封底+哑膜)

折叠方式：骑马钉

页数：24页



GoveeLife

Model:H5194

User Manual

Smart Wireless Meat
Thermometer(4-Probe)

English

01

Deutsch

16

Français

31

Español

46

Italiano

61

Safety Instructions

Read and save these instructions:

- Do not let children use this product, as there is a risk of injuries from the temperature probes.
- Avoid exposing the thermometer body to high temperatures. Do not attach it to the surface of a high-temperature stovetop, oven, or grill. Do not place the thermometer body inside an oven or grill.
- Do not touch the probe directly with bare hands during or directly after cooking. Use heat-insulating gloves to avoid burns.
- Do not submerge the thermometer or probes in water when cleaning and do not clean them in a dishwasher. Instead, lightly rinse them with flowing water and wipe clean.
- Do not use corrosive chemicals when cleaning.
- Always insert the probe past the safety notch (the minimum insertion point) to avoid product damage and personal injuries.
- DO NOT use the probe when cooking at temperatures above 572°F/ 300°C, or when cooking directly above hot coals or flames.
- DO NOT place probe charging unit directly on the grill cover or too close to any hot surface.
- DO NOT remove the probe while it is exposed to heat. The probe must be inserted in and removed from food away from all heat sources.
- Always use eye protection when removing a probe that has exceeded the maximum temperature or come in contact with hot charcoals or direct flames.


- DO NOT use the probe when searing. If the probe falls into the fire or direct heat source, turn off the cooking appliance and close the lid immediately. Allow the probe to cool completely before removing.
- DO NOT allow the probe to come in contact with hot charcoal or coals.
- The probe will be hot during and after use. Wear heat-resistant gloves when handling the probe.
- Always insert the probe past the safety notch to avoid damage.
- DO NOT use the probe in a microwave or pressure cooker.
- DO NOT place the probe charging unit on any hot surface.
- DO NOT drop the probe onto hard surfaces.
- DO NOT use cleaning products containing alcohol, ammonium, benzene, or abrasives, all of which could damage the device.
- DO NOT submerge the probe in water for a long period of time.
- DO NOT run the probe under cold water immediately after cooking. Let the probe cool down prior to washing.
- DO NOT exceed the probes internal sensor limit of 212°F/100°C or the ambient sensor limit of 572°F/300°C. Temperatures above these maximums may damage the probe. AND RESULT IN THERMAL SHOCK AND/OR INACCURATE MEASUREMENTS"
- DO NOT expose the probe's charging unit to moisture. Keep it covered in inclement weather and do not put it in the sink.

- Store the probe in a dry, cool place when not in use. This product is only designed for use in food. Use it only for its intended purpose.
- Please use the original Base to charge the probe. Make sure the temperature probe is fully charged at least every 3 months when not in use for a long period of time.
- DO NOT beat the probe so that the ceramic, glass and electronic components inside the probe will not be damaged.
- Consuming raw or undercooked meats, poultry, or seafood may increase your risk of foodborne illness. Always cook your food to USDA safe temperatures.
- Always keep the probe pointed away from fingers and body. Contact may result in injuries. Keep out of reach of children.
- EXPOSURE TO ELECTROMAGNETIC AND ELECTROSTATIC NOISE, SUCH AS FROM WIRELESS COMMUNICATION DEVICES, MAY RESULT IN INACCURATE MEASUREMENTS.

Package Includes


Item	B5194011
Probe	4
Base	1
Charging Cable	1
User Manual	1
Quick Start Guide	1
Service Card	1

At a Glance



Screen Display

- | | |
|----------------------|------------------------|
| a. Wi-Fi Signal | a. Internal, Ambient |
| b. Alarm Mute | b. Probe Number |
| c. Bluetooth | c. Probe Battery |
| d. Alert Temperature | d. Current Temperature |
| e. Base Battery | e. Temperature Unit |

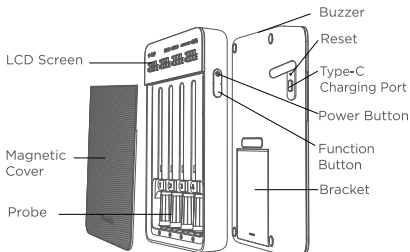

Power Button

1. Press for 3 seconds to turn the thermometer on/off.
- 2 Short press to switch between the current temperature and alert temperature.

Function Button

Short press to display the internal temperature and ambient temperature

Probe



Internal Sensor

To: detect the internal temperature of the food.

Ambient Sensor

To: detect the ambient temperature of the food.

Safety Notch

Insert the part under the safety notch into the food.

Note:

1. Charge the probe for 25 minutes before use.
2. When taking out the probe from the Base quickly the Base screen won't display a number. This means the probe is disconnected from the Base, which is normal. Please wait for the probe to reconnect to the Base (the connection will be faster in an open environment).

3. If the Base screen doesn't display a number, it means the probe is disconnected from the Base. Please go to the Device Settings page in Govee Home App and follow the in-app instructions to complete re-pairing.

Step 1: Fully charge the base before first use with the provided cable, long press the Power button for 3s to turn it on and the screen will start to display. Place the probe in the base to charge for 25 minutes before use.

Step 2: Download Govee Home App. Open the app and tap the "+" icon at the top right corner and select "H5194". Follow instructions in app to complete connecting. (Only 2.4GHz Wi-Fi is supported for the base)



Govee Home App



Step 3: Take out the probe from the base, and it will display the probe number and temperature. If no display, please wait for reconnection or rebind the probe by visiting the "Device Settings" - "Rebind" page and follow the instructions to try pairing again.

Note: The base will not display content if the probe is out of power.

Step 4: Insert the probe correctly into the food to detect temperature. You can also set the desired meat temperature for the corresponding meat, and once the temperature meets the target, you will be notified by the alarm sound and the app notification.

Step 5: After grilling, make sure the ambient temperature has dropped to a safe level before removing the probe. And remember to wear a heat-resistant glove.

Step 6: Use a clean damp cloth to wipe the probe after use. Then place the probe properly into the Base to charge for use next time.

Note:

- In an open environment, keep the probe and base within 500ft (150m); in an enclosed environment, keep them within 10ft (3m).
- Place the Base at least 1ft (30cm) away from the cooking appliance to avoid any potential damage from the heat.
- High temperatures will affect the probe connection distance, please try to keep the base close to the probe.

Temperature Alerts & Alarms

• Cooking Temperature Alert

When the monitored temperature reaches the preset cooking temp, the alarm will sound and the app will push an alert notification.

• Base Battery High Temperature Alarm

Avoid placing the base in contact with high-temperature surfaces or environments. If the internal battery reaches a temperature of 122°F(50°C), the alarm will be triggered and the base should be immediately removed. If the battery reaches a temperature of 131°F(55°C), the base will automatically shut down.

Specifications

Battery	3.85V 5000mAh (19.25Wh)
Input	9V $\Rightarrow$ 2A/5V $\Rightarrow$ 3A
Internal Temperature	14°F to 212°F(-10°C to 100°C)
Ambient Temperature	14°F to 572°F(-10°C to 300°C)
Accuracy	($\pm 1^\circ\text{C}$) 0°C to 100°C/32°F to 212°F ($\pm 2^\circ\text{C}$) 100°C to 200°C/212°F to 392°F ($\pm 5^\circ\text{C}$) 200°C to 300°C/392°F to 572°F
Probe-Battery Life	48h
Base-Battery Life	72h
Base-Charge Temperature Range	10°C to 45°C/50°F to 113°F

Troubleshooting

1. The screen will display error codes under the following circumstances:

Screen display	Connotation
E1	The probe is damaged, please contact customer service or buy a new probe.
E2	The base temperature is abnormal.
HHH/LLL	Probe temperature is too high/low.

2. Cannot connect to Wi-Fi.

- Check that the thermometer is connected to your Wi-Fi router's 2.4GHz network 5GHz is not supported.
- The thermometer's Wi-Fi connection distance is up to 328 ft/100 m, so make sure your Wi-Fi router is able to reach this signal coverage distance. Note that obstructions can limit a router's coverage area.
- Place the thermometer as close as possible to the Wi-Fi router.

3. Cannot power on/off.

- The base is low power. Please charge the base before trying to turn it on.
- Press the power button for 3 seconds to turn the thermometer on and off. If turned on, press again to switch between the current temperature and the preset temperature.

- If the thermometer freezes and doesn't respond to button presses, use a needle or similar object to press in the shutdown button to shut off the thermometer. Then, press the power button for 3 seconds to try to turn it on.
4. The ambient temperature doesn't match the cooker.
 - Typically, built-in thermometers in cooking appliances measure temperatures in different spots than where you place your food. The Probe provides an accurate reading of the temperature your food is exposed to, aiding in the calculation of a more precise cook time.
 5. The internal temperature doesn't match other thermometers.
 - While the meat is still cooking, there can be variations in temperature in different parts of the meat. This can happen because of differences in thickness, fat content or proximity to bones.
 - The temperature sensor is at the tip of the needle, please make sure the probe tip is inserted into the meat. The temperature may be inaccurate if inserted inside a cavity.
 - Please check if the screen displays an alarm temperature, and press the Power/Function button to switch the display.
 5. The probe is disconnected from the base.
 - The grill may block the signal, please place the base near the probe with the upper/lower vent open.

- When grilling, keep the handle as far away from metal as possible.
- High temperatures will affect the probe connection distance, please try to keep the base close to the probe.
- Check if the probe is fully charged/damaged. Exposure of the probe tip to meat will cause damage to the probe battery. If damaged, please contact the after-sales service for replacement.

Customer Service



Warranty: 12-Month Limited Warranty



Support: Lifetime Technical Support



Email: support@govee.com



Official Website: www.govee.com



@GOVEE



@Goveelife.official



@GoveeLife



@Goveelife



@GoveeLife

Compliance Information

FCC Statement

This device complies with Part 15 of the FCC Rules.

Operation is subject to the following two conditions:

(1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Warning: Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

(1) Reorient or relocate the receiving antenna.

(2) Increase the separation between the equipment and receiver.

(3) Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

(4) Consult the dealer or an experienced radio/TV technician for help.

FCC and ISED Radiation Exposure Statement

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.

L'appareil a été évalué pour répondre aux exigences générales en matière d'exposition aux RF. L'appareil peut être utilisé en condition d'exposition portable sans restriction.

ISED STATEMENT

This device complies with Innovation, Science and Economic Development Canada licence-exempt RSS standard(s). Operation is subject to the following two conditions:

(1) this device may not cause interference, and
(2) this device must accept any interference, including interference that may cause undesired operation of the device."

Cet appareil est conforme aux normes RSS exemptées de licence d'innovation, sciences et développement économique Canada. Le fonctionne-

ment est soumis aux deux conditions suivantes:
(1) l'appareil nedit pas produire de brouillage, et
(2) l'utilisateur de l'appareil doit accepter tout
brouillage radioélectrique subi, même si le brouillage
est susceptible d'en compromettre le fonctionnement."

The following importer is the responsible party
Name: GOVEE MOMENTS (US) TRADING LIMITED
Address: 2501 Chatham Rd Suite R Springfield IL 62704
Email: support@govee.com
Contact information: <https://www.govee.com/support>

EU Compliance Statement:

Shenzhen Qianyan Technology LTD here by declares
that this device is in compliance with the essential
requirements and other relevant provisions of the
Directive 2014/53/EU.

A copy of the EU Declaration of Conformity is
available online at www.govee.com/doc

EU contact address:

 GOVEE MOMENTS (DE) HANDEL GmbH
(E-mail: eu_rep@govee.com)

Zunftstraße 13 - Raum 205, 50374 Erftstadt, Germany

EU-Compliance:

Hiermit erklärt Shenzhen Qianyan Technology LTD
dass dieses Gerät den wesentlichen Anforderungen
und anderen einschlägigen Bestimmungen der
EU-Richtlinie 2014/53/EU entspricht. Eine Kopie der
EU-Konformitätserklärung finden Sie online auf
www.govee.com/doc

Kontaktadresse innerhalb der EU:

 GOVEE MOMENTS (DE) HANDEL GmbH
(E-mail: eu_rep@govee.com)

Zunftstraße 13 - Raum 205, 50374 Erftstadt, Germany

Déclaration de conformité UE:

Par la présente, Shenzhen Qianyan Technology LTD déclare que cet appareil est conforme aux principales exigences et autres clauses pertinentes de la directive européenne 2014/53/EU.

Une copie de la déclaration de conformité UE est disponible sur le site www.govee.com/doc

Adresse de contact pour l'UE :

  GOVEE MOMENTS (DE) HANDEL GmbH
(E-mail: eu_rep@govee.com)

Zunftstraße 13 - Raum 205, 50374 Erftstadt, Germany

Declaración de cumplimiento UE:

Shenzhen Qianyan Technology LTD por la presente declara que este dispositivo cumple los requisitos básicos y el resto de provisiones relevantes de la Directiva 2014/53/EU.

Hay disponible online una copia de la Declaración de conformidad UE en www.govee.com/doc

Dirección de contacto de la UE:

  GOVEE MOMENTS (DE) HANDEL GmbH
(E-mail: eu_rep@govee.com)

Zunftstraße 13 - Raum 205, 50374 Erftstadt, Germany

Dichiarazione di conformità UE:

Shenzhen Qianyan Technology LTD dichiara che il presente dispositivo è conforme ai requisiti essenziali e alle altre disposizioni rilevanti della direttiva 2014/53/EU.

Una copia della dichiarazione di conformità UE è disponibile online all'indirizzo Web www.govee.com/doc

Indirizzo di contatto UE:

  GOVEE MOMENTS (DE) HANDEL GmbH
(E-mail: eu_rep@govee.com)

Zunftstraße 13 - Raum 205, 50374 Erftstadt, Germany

UK Compliance Statement:

Shenzhen Qianyan Technology LTD hereby declares that this product complies with the UK Product Security and Telecommunications Infrastructure (Security Requirements for Relevant Connectable Products) Regulations 2023, A copy of the UK Statement of Conformity is available online at www.govee.com/doc

UK Authorised Representative :

GOVEE MOMENTS(UK) TRADING LIMITED

(uk_rep@govee.com)

4th Floor, 18 St Cross Street, London EC1N 8UN

	Bluetooth®	Wi-Fi
Frequency	2.4GHz	2412-2472MHz
Maximum Power	<10dBm	<20dBm (E.I.R.P.)

Shenzhen Qianyan Technology LTD hereby declares that this product complies with the UK Product Security and Telecommunications Infrastructure (Security Requirements for Relevant Connectable Products) Regulations 2023, A copy of the UK Statement of Conformity is available online at <http://www.govee.com/doc>



Environmentally friendly disposal

Old electrical appliances must not be disposed of together with the residual waste, but have to be disposed of separately. The disposal at the communal collecting point via private persons is for free. The owner of old appliances is responsible to bring the appliances to these collecting points or to similar collection points. With this little personal effort, you contribute to recycle valuable raw materials and the treatment of toxic substances.

Umweltfreundliche Entsorgung

Elektro-Altgeräte dürfen nicht mit gewöhnlichem Abfall entsorgt werden und müssen separat entsorgt werden. Die Entsorgung an kommunalen Sammelstellen ist für Privatpersonen kostenlos. Die Eigentümer der Altgeräte sind für den Transport zu den Sammelstellen verantwortlich. Durch diesen geringen Aufwand können Sie zur Wiederverwertung von wertvollen Rohmaterialien beitragen und dafür sorgen, dass umweltschädliche und giftige Substanzen ordnungsgemäß unschädlich gemacht werden.

Mise au rebut écologique

Les appareils électriques usagés ne doivent pas être éliminés avec les déchets résiduels. Ils doivent être éliminés séparément. La mise au rebut au point de collecte municipal par l'intermédiaire de particuliers est gratuite. Il incombe au propriétaire des appareils usagés de les apporter à ces points de collecte ou à des points de collecte similaires. Avec ce petit

efffort personnel, vous contribuez au recyclage de matières premières précieuses et au traitement des substances toxiques.

Tratamiento de residuos responsable con el medio ambiente

Los aparatos eléctricos viejos no pueden desecharse junto con los residuos orgánicos, sino que deben ser desechados por separado. Existen puntos limpios donde los ciudadanos pueden dejar estos aparatos gratis. El propietario de los aparatos viejos es responsable de llevarlos a estos puntos limpios o similares puntos de recogida. Con este pequeño esfuerzo estás contribuyendo a reciclar valiosas materias primas y al tratamiento de residuos tóxicos.

Smaltimento ecologico

I vecchi dispositivi elettrici non devono essere smaltiti insieme ai rifiuti residui, ma devono essere smaltiti separatamente. Lo smaltimento da parte di soggetti privati presso i punti di raccolta pubblici è gratis. È responsabilità del proprietario dei vecchi dispositivi portarli presso tali punti di raccolta o punti di raccolta analoghi. Grazie a questo piccolo impegno personale contribuirete al riciclo di materie prime preziose e al corretto trattamento di sostanze tossiche.



FOR INDOOR USE ONLY
NUR FÜR DEN INNENGEBRAUCH
POUR UNE UTILISATION EN INTÉRIEUR UNIQUEMENT
SÓLO PARA USO EN INTERIORES
SOLO PER USO INTERNO

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Shenzhen Qianyan Technology LTD is under license.

The trademark GoveeLife has been authorised to Shenzhen Qianyan Technology LTD.
Copyright ©2021 Shenzhen Qianyan Technology LTD.
All Rights Reserved.



Raccolta Carta

To ensure an accurate temperature reading, the lens of the unit should be free of dirt, dust, moisture, fog, smoke and debris.



Govee Home App

For FAQs and more information,
please visit: www.govee.com