

Bluetooth-compatible connection


Connect Bluetooth-compatible to start a new way of working on iPad.



- 1 Push the button to "On" and press "Connect".
The "📶" light turns on.



- 2 On the back of the mouse, push the button to "Bluetooth-compatible".

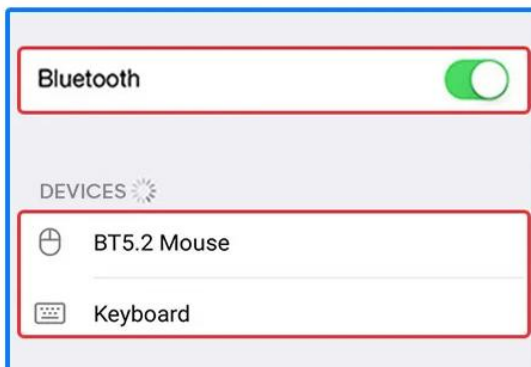

- 3 Turn on Bluetooth, connect the mouse "BT5.2 Mouse" first, and then connect the keyboard "keyboard".



- 4 Fn+Q (Android), W (Windows), E (IOS), select the corresponding system

Wireless Keyboard

Product specifications

- | | |
|------------------------------------|---|
| 1. Bluetooth connectivity | 9. Standby Time : >100 days |
| 2. Operating Distance to 10 meters | 10. Charging Time : 3-4 hours |
| 3. Modulation system: GFSK | 11. Battery Capacity : 150MAh/280MAh |
| 4. Operation Voltage: 3.0-4.2V | 12. Uninterrupted Working Time: 100 hours |
| 5. Operation current: <2.5mA | 13. Lithium Battery Life : 1-2 years |
| 6. Standby Current: <0.3mA | 14. Key Strength : 80+-10g |
| 7. Sleeping Current: <40uA | 15. Key life : 5million strokes |
| 8. Charging Current: >200mA | 16. Operating Temperature : -10-+55C |

Getting Started Guide

1. Button



Power toggle switch: slide switch ON or OFF to control the device power turn on or turn off.



Connect Button: Under the Power button turn on case, ready to be connect to Ipad.

2. Indicator



Power

Power indicator: turn on the power toggle switch. The state indicator light will be on for 4 seconds, then the light will go off.



Bluetooth connect indicator: Press on the [connect] button, the [Bluetooth] indicator light will be blinking, indicator light will stay on until the keyboard connect with your device.



CAPS

Uppercase and lowercase indicator: Indicator light will stay on under the uppercase.



Charge

Charging indicator: indicator light will be on when the keyboard will be charging by USB.

Charging

When the battery is low, the power indicator light flashing, that means need to charge the bluetooth keyboard.

1. Connect the B end of the original USB cable to the keyboard.
2. Connect the A end of the USB cable to the power adapter or A PC USB interface.
3. When charging "Charge" indicator will light up, when the battery is full of "Charge" will automatically lights go out.

2025.04.09 15:34


Keyboard User Manual

Bluetooth keyboard connection operation steps


1. To set the keyboard power button to "ON" position, the power indicator light will light up for 4 seconds, and then go out; Press the "Connect" to Connect a keyboard key, Bluetooth connection will twinkle lights when key Bluetooth is started, can be connected to the tablet computer.




2. Open and unlock the tablet computer, click on the flat Board computer "Settings" icon.

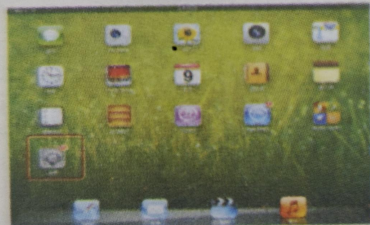

3. Select "bluetooth" in "Settings" interface. Enter the bluetooth Settings interface, click on the bluetooth Pass to open the connection.

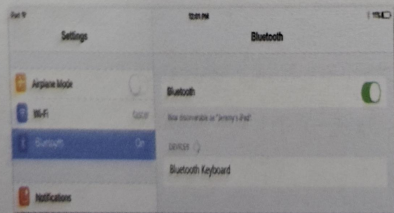

4. The tablet computer will automatically search for enabled Bluetooth devices, wireless keyboard found signals, Click the project link.

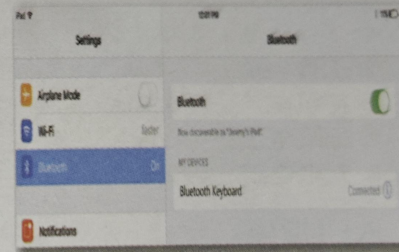

⚠ Caution:


1. In order to extend service life, we recommend you turn the keyboard off when there is long time no interactive.
2. We recommend to charging the keyboard only when the [power] indicator light start blinking, it is time to recharge the keyboard. It's better not less than 3 hours when every time charging.

2025.04.09 15:34

Touch Keyboard



Bluetooth connection
Connect Bluetooth quickly enter the office era

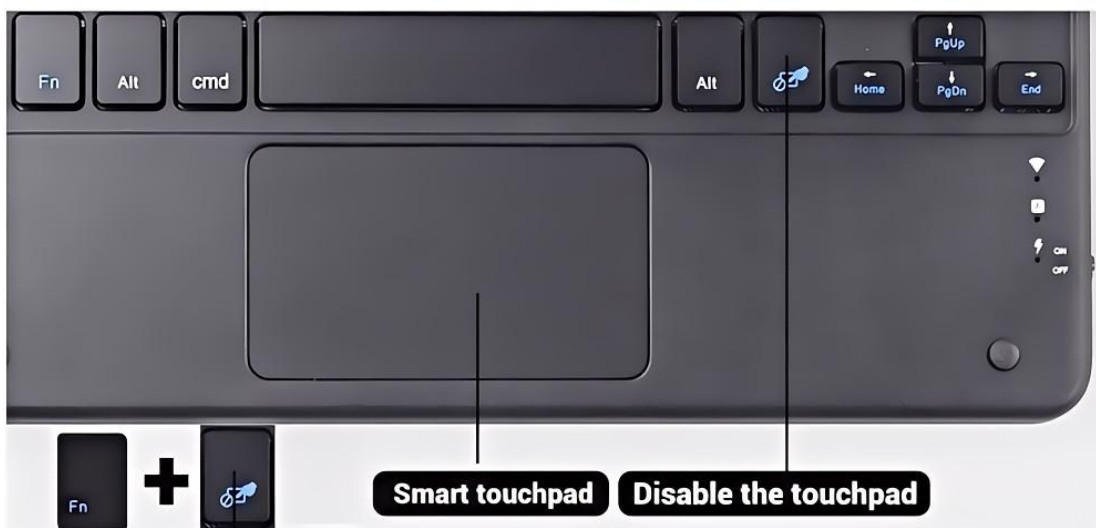

Keyboard shortcut function description

	Back to Home page		Brightness -		Brightness +
	search		Screen keyboard		Screen capture
	Previous track		Pause/Play		Next track
Connect	Bluetooth pairing		Volume-		Volume+
	Select all		Copy		Paste
	Touchpad on/off		Backlight brightness adjustment		Lock screen
	E-MAIL		Function key		Language switching

After switch system push above multimedia function show :

Notice 1 : This keyboard is 3-system universal keyboard , after confirming using it then push FN+Q/W/E to choose suitable system .

Notice 2 : Only backlight kind keyboard has this button .

Color adjust : total 7 kind colors circulating


Backlight model : Single push backlight key actualize three kinds models .

1.1 Single color backlight (RGB) 2. Breathing light 3. Backlight turn off .


RGB backlight switch : Under single color model situation , push FN+backlight key to switch .

3. Backlight lightness : Under single color model situation , push backlight key + direction upward arrow key , backlight lightness increase ; Push backlight + direction downward arrow key , backlight lightness reduce .


IOS13 system




Sliding finger




Single finger fast click without loose click



Two-finger vertical/horizontal move



Three fingers move up at the same time



Three fingers sliding right at the same time


IOS 13 mouse function

*Auxiliary Touch

Product model specification

1. Bluetooth Interface Standard
2. Operating Distance Available: 10 meters
3. Modulation System: GFSK
4. Operating Voltage: 3.0-4.2V
5. Working Current: <8mA
(When the touchpad is working)
6. Standby Current: <0.3mA
7. Sleeping Current: <40 μ A
8. Charging Current: 100mA/200mA
(Backlight)
9. Standby Time: >100 days
10. Charging Time: 2-3 hours
11. Lithium Battery Capacity: 150mA/280mA
(Backlight)
12. Sustainable Working Time: more than
100/30 hours
13. Lithium Battery Life: 1 year
14. Key Strength: 80 ± 10 g
15. Key Life: 5 Million Stroke
16. Operating Temperature: $-10^{\circ}\text{C} \pm 55^{\circ}\text{C}$

Getting Started Guide

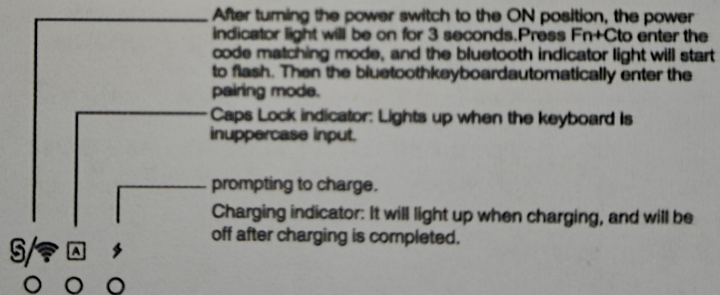



ON OFF Switch

- 2 -

IOS13 system touchpad gestures

	Moving the cursor		Left mouse button
	Left click to select the target drag		Right mouse

2025.04.09 15:37

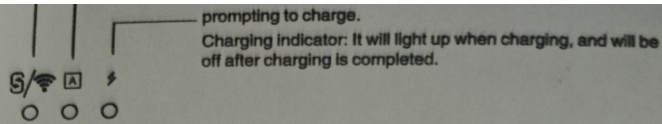

- 2 -

IOS13 system touchpad gestures

	Moving the cursor		Left mouse button
Sliding finger		Single finger tap	
	Left click to select the target drag		Right mouse button
Single finger fast double click without loose drag		Two-finger tapping	
	Vertical/horizontal scrolling		Middle mouse button
Two-finger vertical /horizontal movement		Three-finger tap	
	Recent task window switch		Back to Home page
Three fingers move up at the same time		Three fingers move down at the same time	
	Active window left /right slide switch		
Three fingers sliding left /right at the same time			

IOS 13 mouse function is enabled: "Settings" - "Accessibility" - "Touch" - "Auxiliary Touch" - "Open"

- 5 -


2025.04.09 15:37

Bluetooth keyboard connection steps


1. After the power switch is turned to the ON position, the power indicator light is on for 3 seconds, the Bluetooth indicator starts to flash, and the keyboard automatically enters the pairing mode.




2. Open and unlock your tablet and click on the "Settings" icon.




3. In the settings menu, click on the "Bluetooth" menu.




4. Turn on the Bluetooth switch and the tablet will automatically search for Bluetooth keyboard devices.



5. Discover the Bluetooth keyboard device: Bluetooth Keyboard ***, and click on it, the Bluetooth keyboard will automatically connect.



6. After the Bluetooth connection is successful, the pairing indicator is off, and "Connected" will appear in the list of Bluetooth devices.



-3-

① Attention

1. When not use for long time, suggest to close keyboard, in order to prolong battery life.
2. In order to get longer battery life ,charging before keyboard power light flashes, charging time must be better more than 2hours.

Energy saving sleep mode



When keyboard not use will be enter sleep mode after 15minutes,keyboard indicator will off, press any key 5s to wake it up when need use again ,then keyboard indicator will turn on .

2025.04.09 15:37

up when charging, and will be

Bluetooth Keyboard will automatically connect.

and "Connected" will appear in the list of Bluetooth devices.



-3-

① Attention

1. When not use for long time, suggest to close keyboard, in order to prolong battery lift.
2. In order to get longer battery lift ,charging before keyboard power light flashes, charging time must be better more than 2hours.

Energy saving sleep mode

When keyboard not use will be enter sleep mode after 15minutes,keyboard indicator will off, press any key 5s to wake it up when need use again ,then keyboard indicator will turn on .

Troubleshooting

1. Make sure the power is turned on
2. Ensure keyboard operable distance
3. Make sure the battery has power
4. Ensure the device' s Bluetooth was turned on
5. Ensure the wireless keyboard was connected with the Bluetooth
6. Ensure the wireless keyboard paired successfully

Cleaning

Washing, alcohol or a similar cleaning agent decontamination keyboard.

Charging

When battery is low, the power indicator blinking, means need to charge the keyboard

1. Connect Genuine Parts USB Type C cable B port to keyboard cradle
2. Connect USB Type C cable A port to power adapter or computer USB port .
3. When charging , charge indicator lights will blinking, after full lights automatically turn off

-6-

2025.04.09 15:37

DUAL MODE MOUSE WITH NOISELESS CLICK

One Mouse, Two Connection Methods, Bluetooth 5.0 + 2.4G Connection



Connection Steps

