PORTO Easy Access
Concealed Cistern

PORTO Easy Access Concealed Cistern Instruction Manual

Contents

PORTO Easy Access Concealed Cistern

Product Information

Specifications:

- **Product Name:** Easy Access Concealed Cistern
- **Type:** Bathroom cistern
- **Installation:** Concealed within the wall for a seamless look
- **Material:** Durable plastic

Product Usage Instructions

1. **Installation:**

   To install the Easy Access Concealed Cistern, follow these steps:
   - Prepare the wall for installation by ensuring it is strong enough to support the cistern.
   - Cut an opening in the wall according to the cistern's dimensions.
   - Securely install the cistern within the wall cavity, ensuring it is level and securely attached.
   - Connect the water supply and test for leaks.

2. **Usage:**

   Once installed, follow these guidelines for using the cistern:
   - Flush the toilet by pressing the flush button or lever connected to the cistern.
   - If there are any issues with flushing or water flow, refer to the troubleshooting section of the manual.
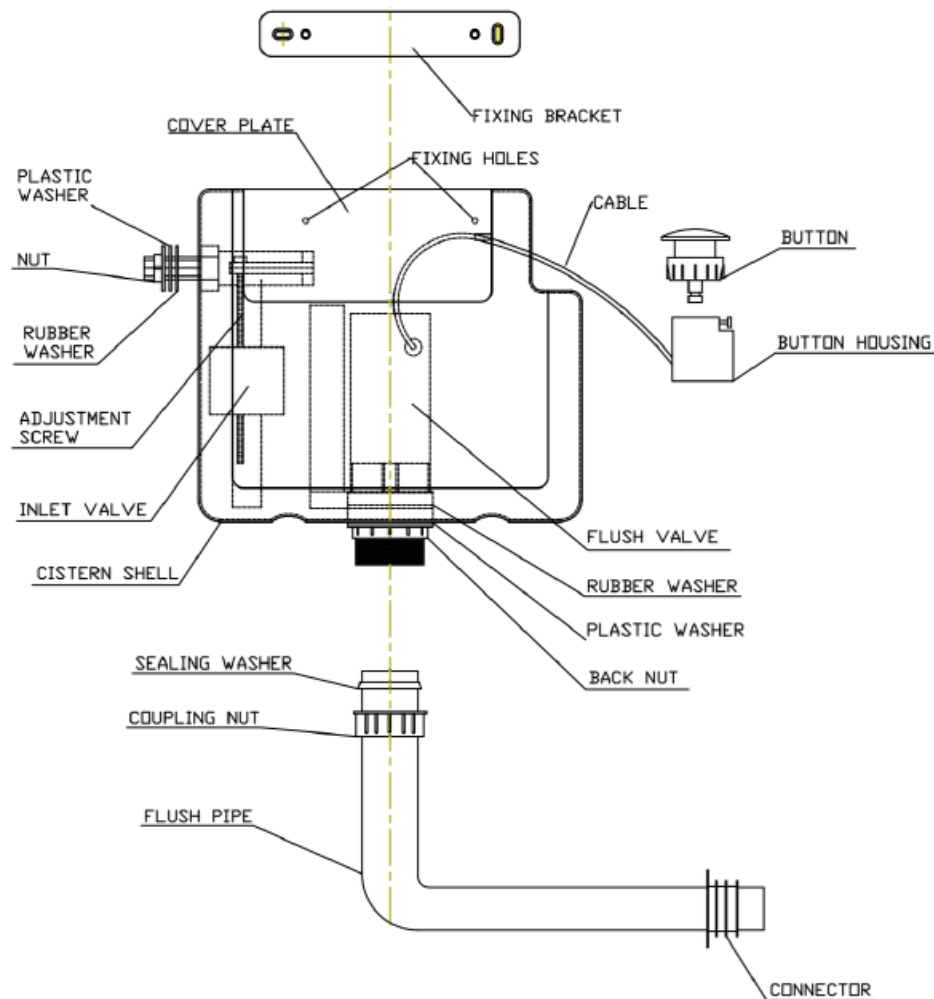
Maintenance:

To ensure optimal performance, perform regular maintenance on the cistern:

- Check for any leaks or water wastage periodically.
- Clean the cistern components to prevent buildup and maintain proper functionality.

Frequently Asked Questions (FAQ):

- Q: How do I access the inside of the concealed cistern for maintenance?
  A: Most concealed cisterns have a flush plate or access panel that can be easily removed to access the inner components for maintenance.
- Q: Can I replace parts of the cistern myself?
  A: It is recommended to consult a professional plumber for any repairs or part replacements to ensure proper installation and functionality.
- Q: What should I do if my cistern is constantly running?
  A: Check for any issues with the flush valve or float mechanism. Adjust or replace these components as needed to stop the constant running.

Product Description

1. Remove the easy access cover plate.
2. Assemble the cistern and fittings as shown in the diagram, making sure the cable is on the right-hand side as you face the front.
3. Place the cable into the slot in the easy access cover plate and clip it into position. Avoid kinking the cable.
4. Mark the position where the cistern will be fitted, ensuring there is at least a 20mm gap between the top of the cistern and the underside of the worktop when installing in a WC unit.
5. Use the fixing bracket and fixing holes to secure the cistern into the WC unit or wall cavity.
6. Measure and cut the flush pipe to size using a fine-toothed saw. Connect the flush pipe to the cistern using the coupling nut and washer.
7. Mark the position for the flush button on the front of the WC unit or ducting, and drill a 40mm hole, ensuring there is enough room behind the fascia for the button housing.
8. Fix the button into position by tightening the back nut. Clip the button housing onto the button, being careful not to bend or kink the cable.
9. If required, adjust the water level in the cistern by turning the adjusting screw on the inlet valve.
10. Connect and fix the WC pan according to the manufacturer's instructions.

Documents / Resources

PORTO Easy Access Concealed Cistern [pdf] Instruction Manual
Easy Access Concealed Cistern, Concealed Cistern, Cistern

References

- **User Manual**