


PRO X 2 LIGHTSPEED

SETUP GUIDE | GUIDE D'INSTALLATION



logitech 

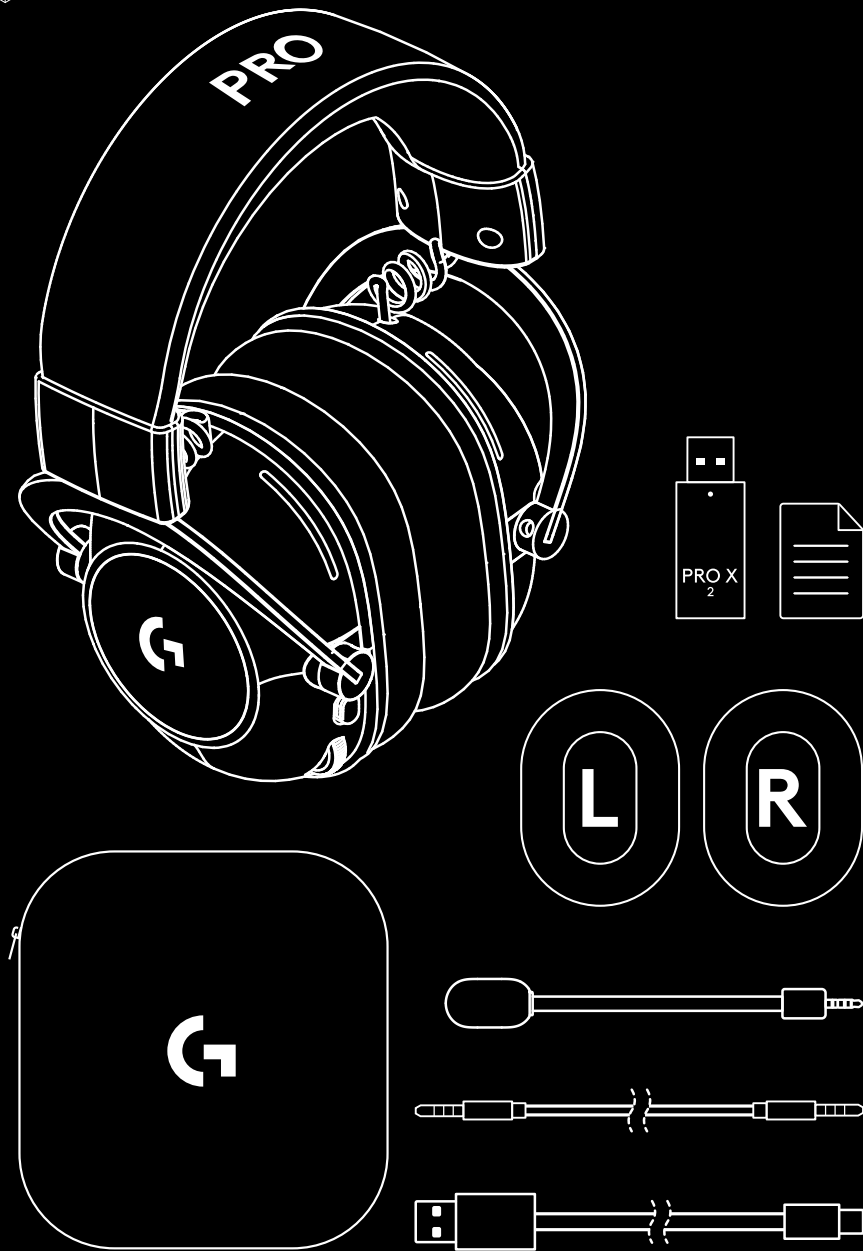

ENGLISH	3
FRANÇAIS.	16
ESPAÑOL	29
PORTUGUÊS	42

GENERAL HEADSET OPERATION

1 Power switch

- When power on LED will light solid green for 5 seconds if battery power $\geq 10\%$. Light will be red for 5 seconds if battery power is $\leq 10\%$. Headset will power down automatically after 30 minutes of no audio to save battery life. To resume use, turn the power off, then back on again. Timeout value can be adjusted in G HUB

2 Volume wheel

- Rotate up to increase OS volume
- Rotate down to decrease OS volume

3 Microphone mute toggle

- Microphone is active when red is not visible
- Microphone is muted when red is visible

4 USB C charging port


- Use provided USB A to USB C charging cable to charge headset by plugging into USB port on PC
- Cable is for charging only – audio will not play over USB

5 Microphone

- For optimal voice pickup, place foam ball approximately two fingers' width from the corner of your mouth
- Blue VO!CE functionality can be enabled using G HUB software


6 Bluetooth / LIGHTSPEED Toggle

- Press to toggle between BT and LIGHTSPEED modes
LED indicator will turn fixed blue for 5 seconds when put into Bluetooth mode, or cyan for 5 seconds when put into LIGHTSPEED mode

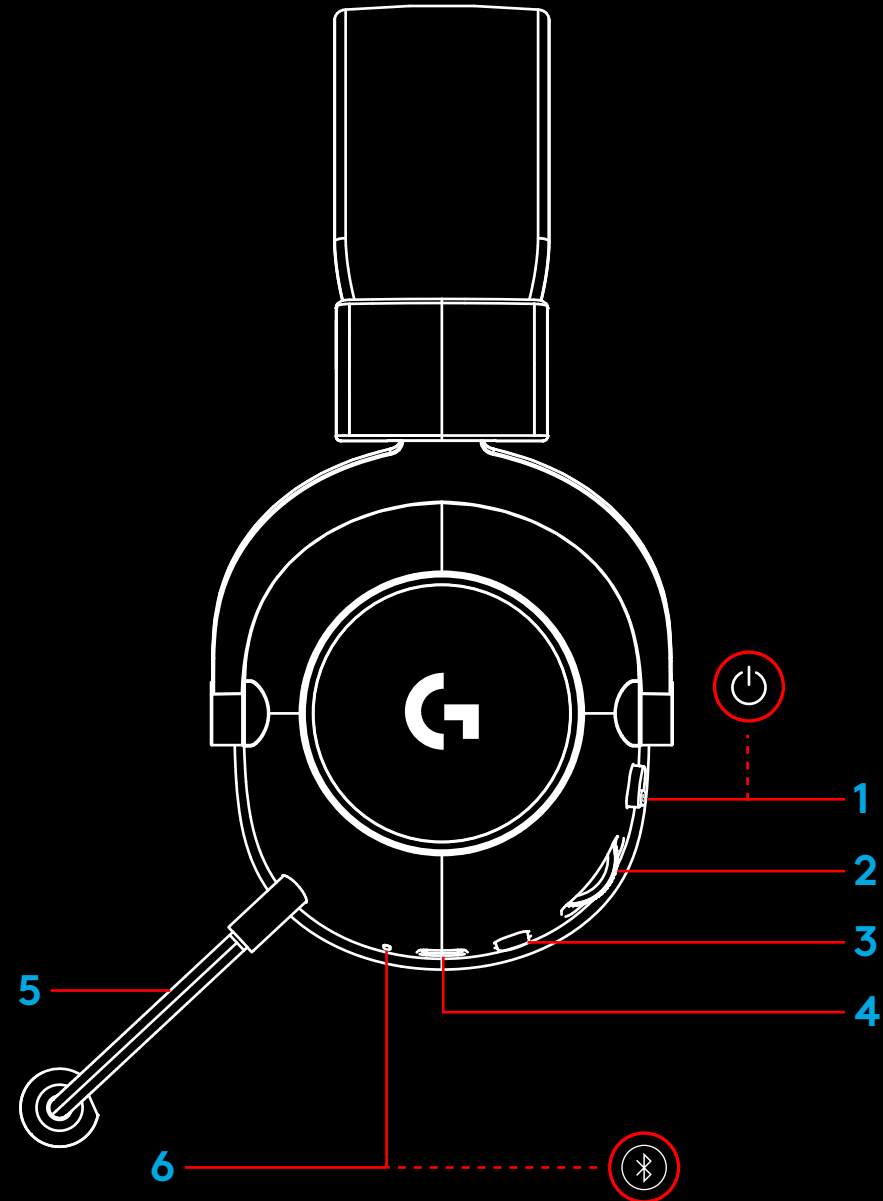


PC SETUP INSTRUCTIONS


- 1 Insert the mic boom completely into headset

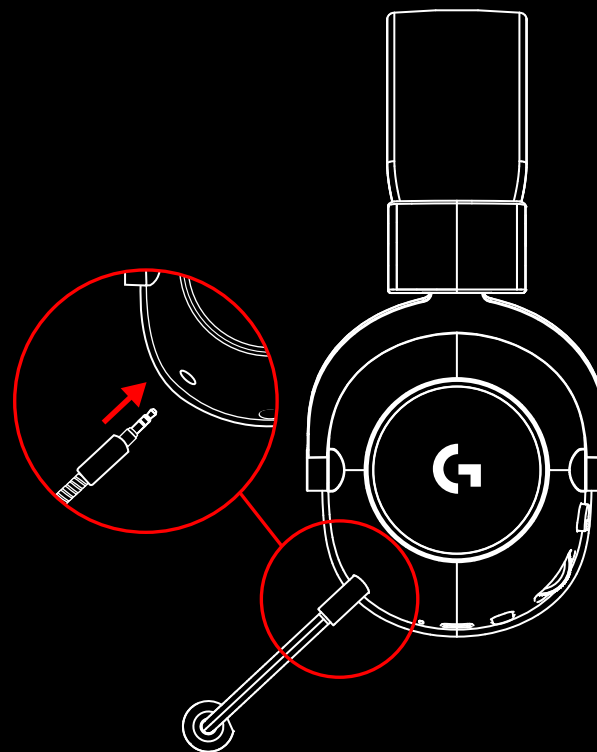


- 2 Insert LIGHTSPEED wireless adapter into USB port of your PC

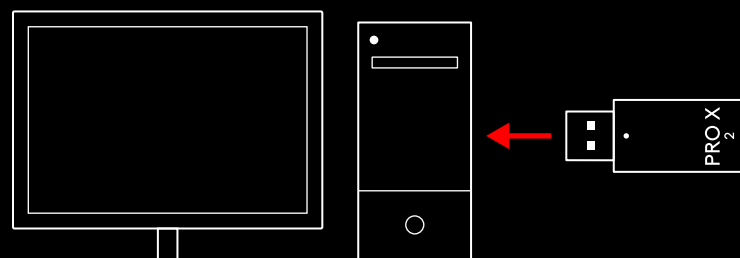


- 3 Toggle headset power switch on (**green** light will appear when first powered on when battery is at or above 10% - LED will turn **red** if battery below 10%)

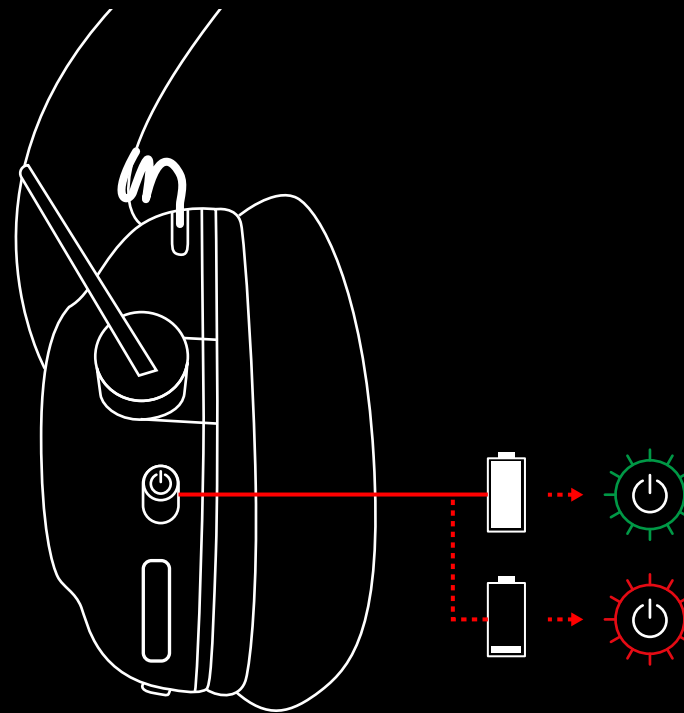

- 4 Open Windows sound settings and confirm that the headset is set as default Output and Input device

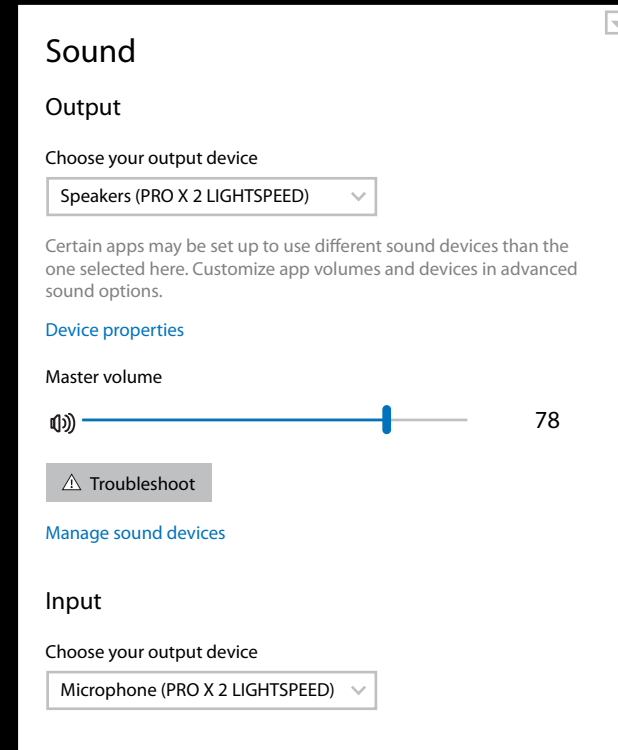


- 5 (Optional) Download Logitech G HUB software to access advanced features. Download at logitechG.com/ghub




logitechG.com/ghub
logitechG.com/support/pro-x-2

PAIRING HEADSET WITH LIGHTSPEED WIRELESS ADAPTER


- 1 Plug in LIGHTSPEED Wireless Adapter
(if already plugged in, un-plug and re-plug in)




- 2 Remove the left earpad cushion

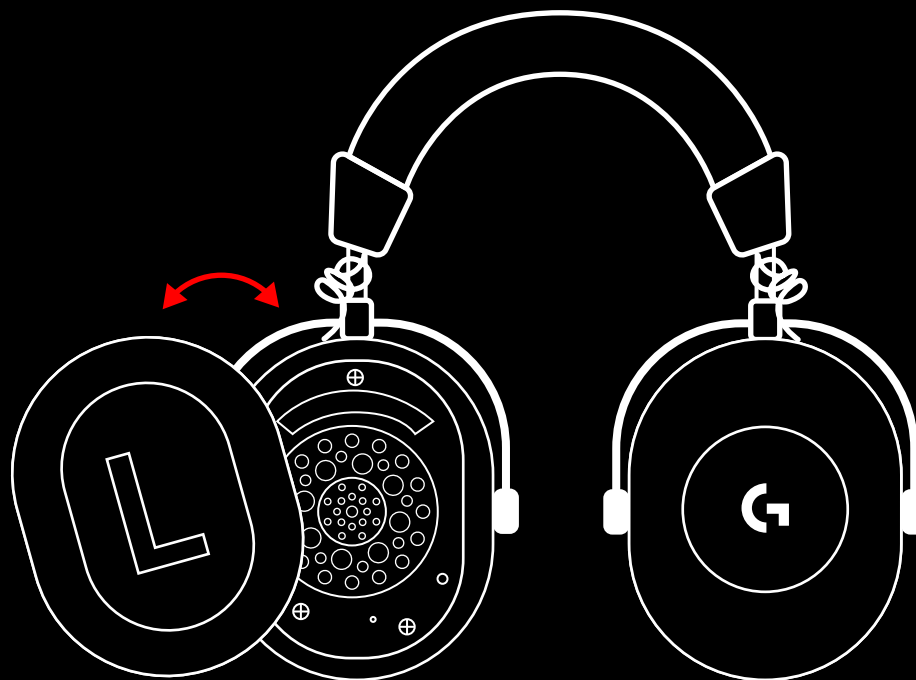

- 3 Use a paperclip to long press the headset pairing button

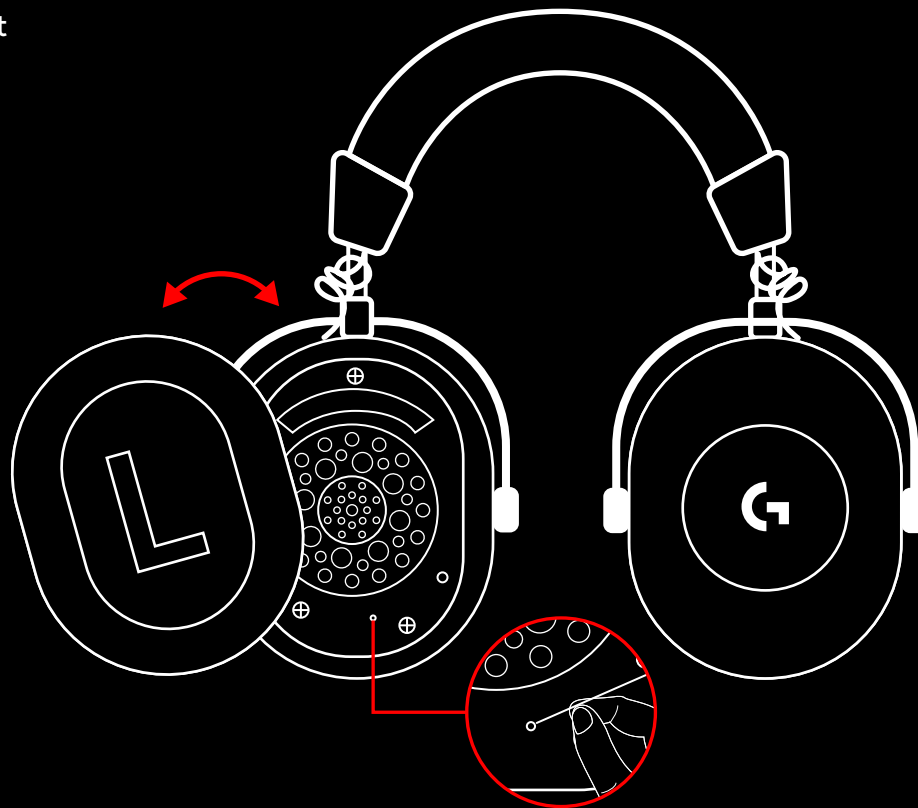


- 4 Use a paperclip to press the LIGHTSPEED wireless adapter pairing button

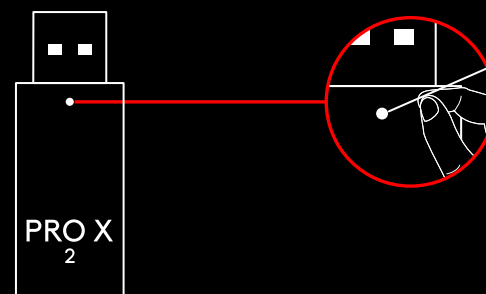


BLUETOOTH PAIRING

1 Turn on headset by sliding power switch

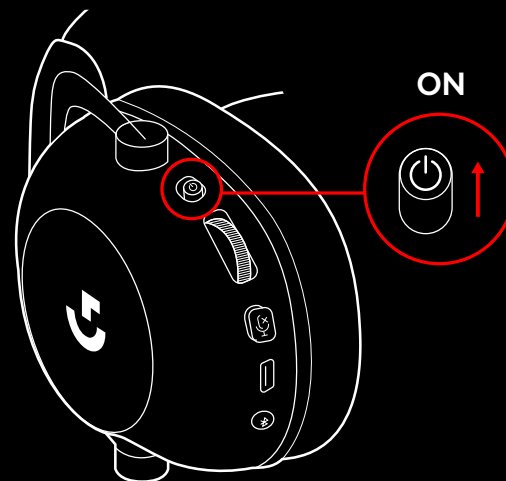


2 Press BT / LIGHTSPEED toggle button.
Power light will turn blue to indicate BT mode

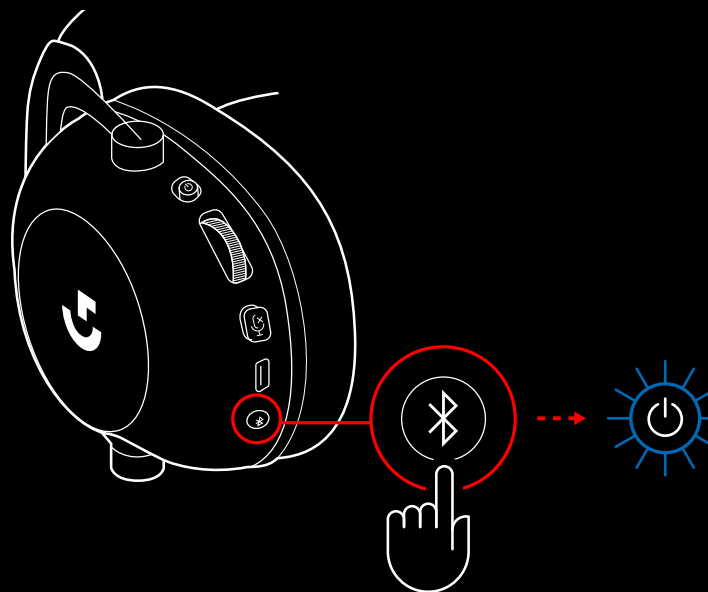


3 Press and hold BT / LIGHTSPEED button

- Headset LED will quickly blink blue

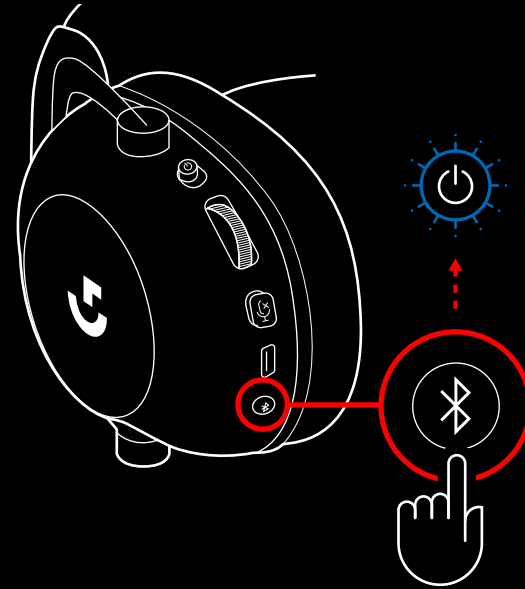

4 Follow *Bluetooth* connection steps for your device


- LED will turn solid blue for 5 seconds when pair is complete

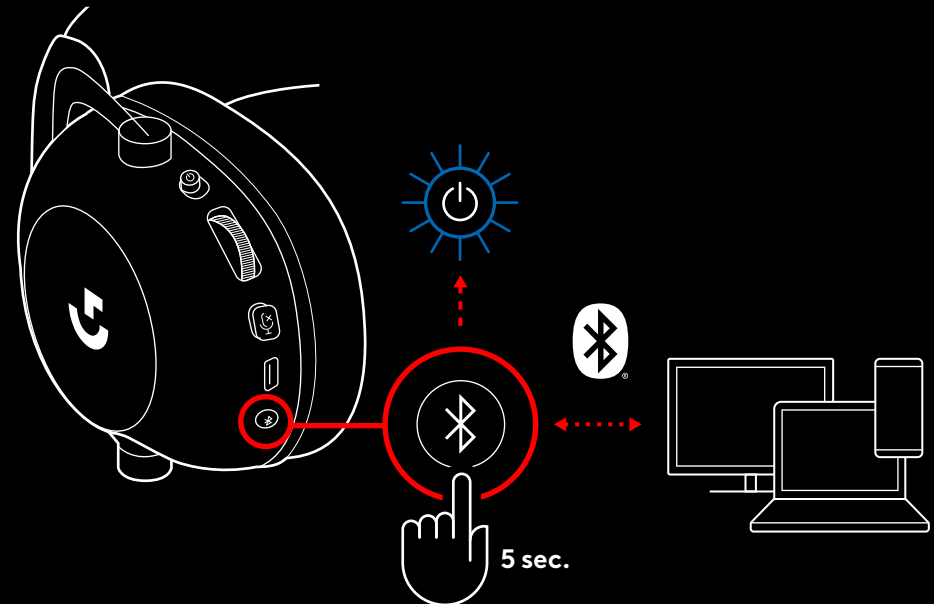

SWITCHING BETWEEN *BLUETOOTH* AND LIGHTSPEED

Short press the *Bluetooth* / LIGHTSPEED toggle button


- LED indicator will turn fixed **blue** for 5 seconds when put into *Bluetooth* mode, or **cyan** for 5 seconds when put into LIGHTSPEED mode

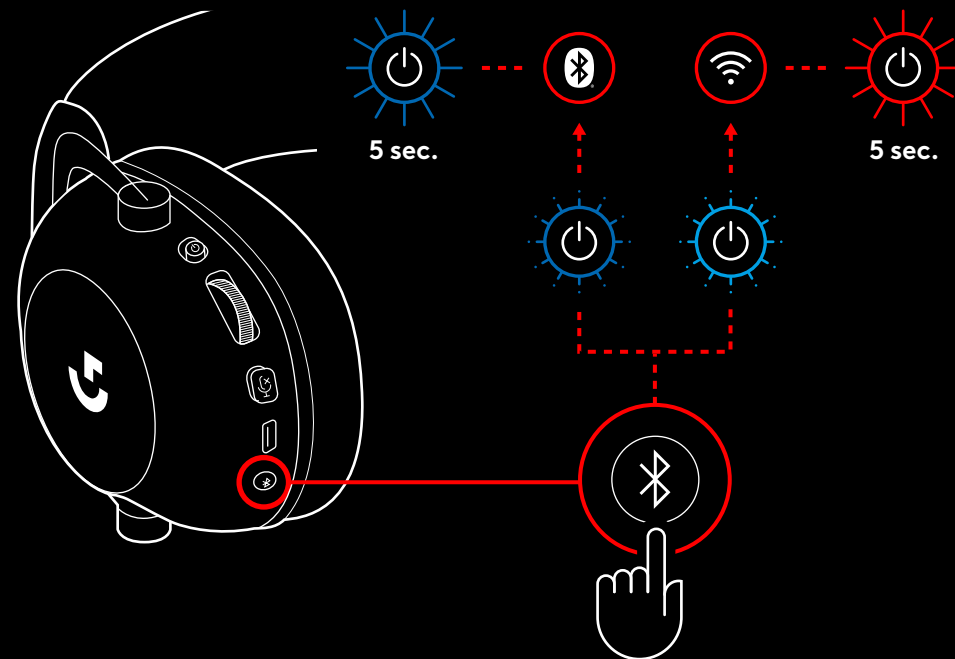

USING THE HEADSET IN WIRED MODE

1 Power off headset


- Headset must be powered off to operate in wired mode

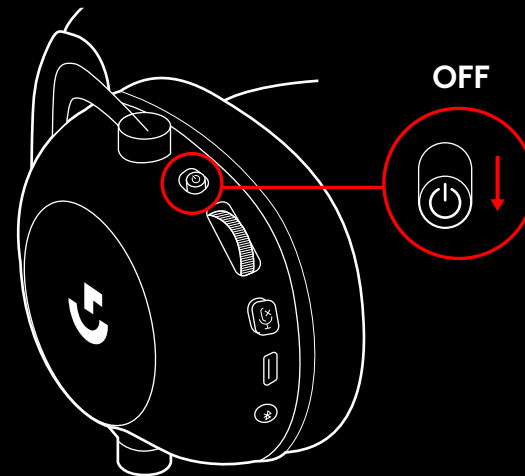


2 Plug the included 3.5mm cable into the 3.5mm jack on the headset

NOTE:

- Do not plug 3.5mm cable into the headset microphone jack.

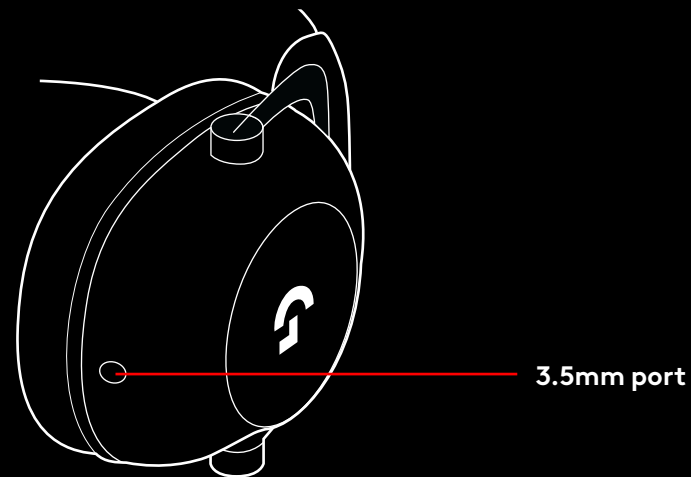


- 3 Plug the other end of the included 3.5mm cable into the 3.5mm jack on the audio source device

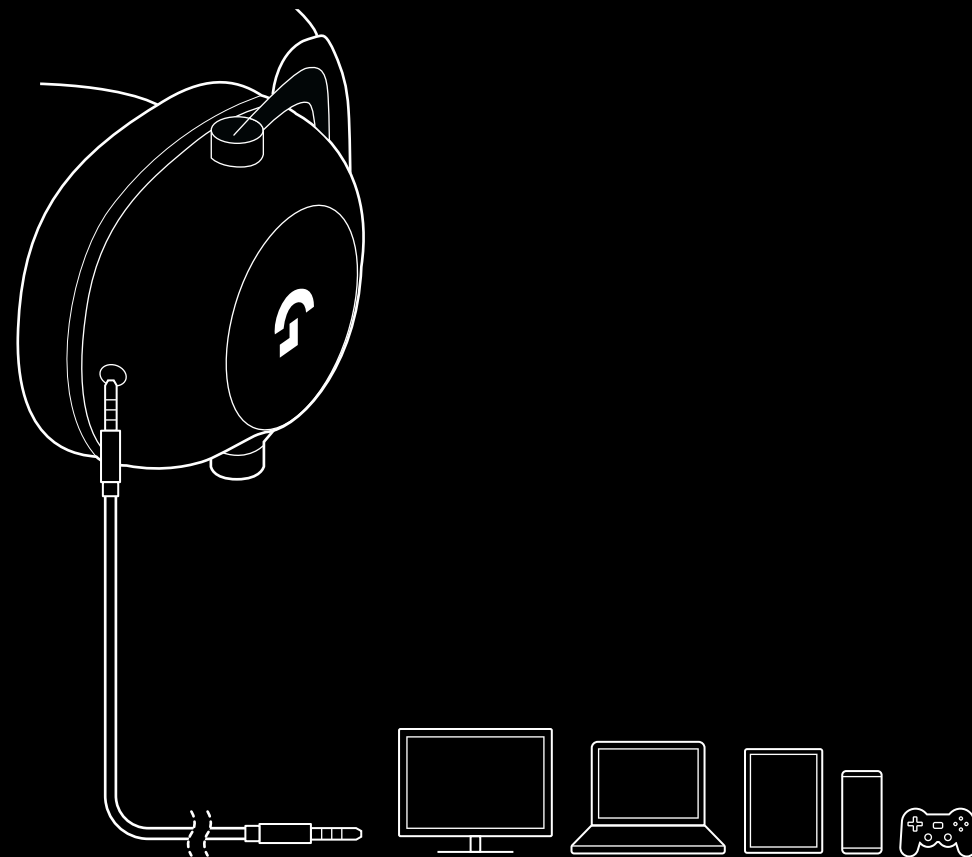


HOW TO MUX IN AN AUX SOURCE

- 1 Headset must be setup in LIGHTSPEED mode

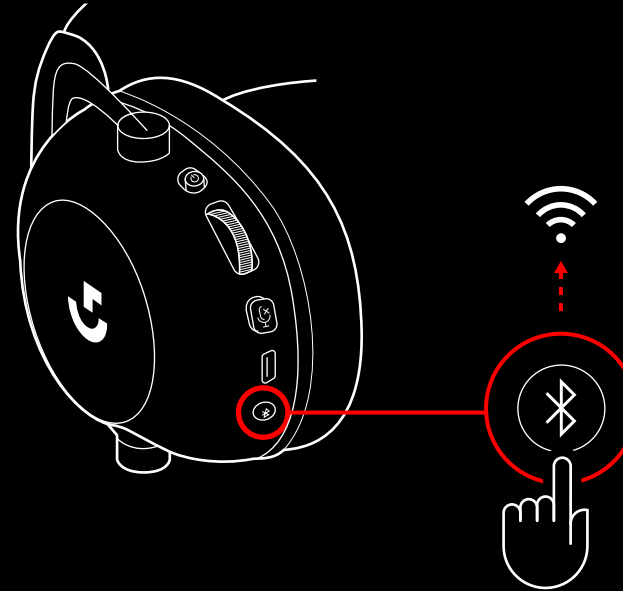


- 2 Plug one end of the included 3.5mm cable into the 3.5mm port of the LIGHTSPEED wireless adapter

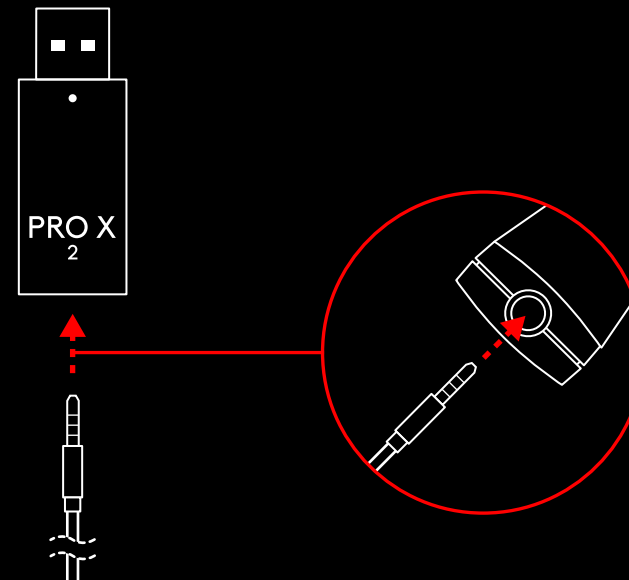

- 3 Plug the other end of the included 3.5mm cable into the 3.5mm port of the audio source you'd like to MUX into the wireless signal.

The MUXed source will stay at a constant volume, whereas the wireless signal can be volume adjusted with the volume wheel.

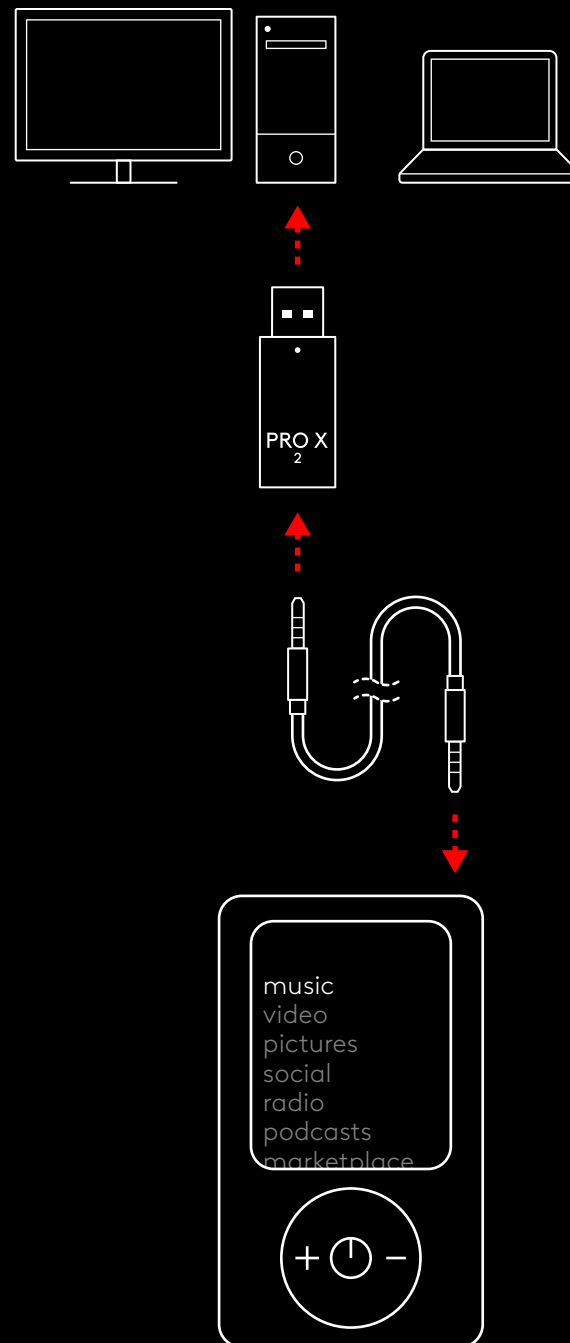

FONCTIONNEMENT GÉNÉRAL DU CASQUE

1 Commutateur d'alimentation

- À la mise sous tension, le témoin lumineux affiche un voyant **vert** fixe pendant 5 secondes lorsque le niveau de charge des piles est à 10% ou plus. Le voyant passe au **rouge** pendant 5 secondes lorsque le niveau de charge des piles descend à 10% ou moins. Afin de préserver la longévité de la batterie, le casque s'éteint automatiquement après 30 minutes sans utilisation. Pour réutiliser le casque, mettez ce dernier hors tension, puis à nouveau sous tension. Ce délai d'arrêt automatique peut être configuré depuis G HUB

2 Molette de volume

- Tournez-la vers le haut pour augmenter le volume du système d'exploitation
- Tournez-la vers le bas pour réduire le volume du système d'exploitation

3 Bouton d'activation/de désactivation du son du micro

- Le microphone est actif lorsque le voyant **rouge** n'est pas visible. Le microphone est désactivé lorsque le voyant **rouge** est visible

4 Port de charge USB-C

- Utilisez le câble de charge USB A vers USB C fourni pour charger le casque en le connectant au port USB du PC.
- Le câble sert uniquement au chargement. L'audio ne peut pas être lu via USB

5 Microphone

- Pour une captation optimale de la voix, placez la boule en mousse à environ deux doigts de l'angle de votre bouche.
- La fonctionnalité Blue VO!CE peut être activée via le logiciel G HUB

6 Bouton de bascule Bluetooth / LIGHTSPEED

- Appuyez sur le bouton pour basculer entre les modes Bluetooth et LIGHTSPEED. Le témoin lumineux affiche un voyant **bleu** fixe pendant 5 secondes en mode Bluetooth ou bien un voyant **cyan** fixe pendant 5 secondes en mode LIGHTSPEED.

