

**PYLE**<sup>®</sup>  
PyleUSA.com



**Questions or Comments?**  
**We are here to help!**  
Phone: 1.718.535.1800  
PyleUSA.com/ContactUs



**PYLE**<sup>®</sup>  
PyleUSA.com



*PPHP1044B*

Wireless BT Streaming PA Speaker System

***USER GUIDE***

**READ ALL INSTRUCTIONS CAREFULLY BEFORE USING THIS PRODUCT.  
RETAIN THIS OWNER'S MANUAL FOR FUTURE REFERENCE.**

### **Features:**

- High-Powered PA Speaker
- Indoor / Outdoor Loudspeaker System
- Bluetooth Wireless Music Streaming Ability
- Multi-Color LED Flashing DJ Party Lights
- Built-in Rechargeable Battery
- FM Radio with Digital Display
- Audio Recording Function
- Microphone Priority 'Talk-Over' Button
- Rugged & Durable Housing Construction
- Connect & Stream Audio from External Devices
- USB Flash & Micro SD Memory Card Readers
- MP3 Digital Audio File Support
- Aux (3.5mm) Input
- 1/4" -inch Microphone Input
- Rear Panel Button Control Center
- Mic Volume, Treble, Bass, Echo Adjustment
- Full Range Stereo Sound Reproduction
- Vented Enclosure Design for Extended Bass
- Telescoping Handle & Rolling Caster Wheels
- \*Optional Power via DC 12V Input
- Used for Backyard Home Karaoke, Stage Performances, Crowd Control

### **Bluetooth Wireless Streaming:**

- Built-in Bluetooth Receiver for Wireless Music Streaming
- Works with All of Today's Latest Devices  
(Smartphones, Tablets, Laptops, Computers, etc.)
- Bluetooth Wireless Network Name: PYLEUSA
- Bluetooth Version: 5.0
- Wireless Range: Up to 32' ft.

### **What's in the Box:**

- PA Speaker System
- Remote Control
- Power Adapter

### **Technical Specs:**

- Power Output: 600 Watt MAX
- PA Speaker Type: Molded Cabinet Loudspeaker
- Sound System: 10" Subwoofer + 1" Tweeter
- Impedance: 4 Ohm
- Frequency Response: 55-20kHz
- S/N Ratio: 60dB +/-3dB
- SPL: 94dB (1W/M)
- T.H.D.: <1%
- USB Interface Type: 2.0
- Digital Media File Compatibility: MP3
- Maximum USB Flash Drive Support: Up to 32GB
- LED Lights Switch, Power ON / OFF
- PA Speaker Rechargeable Battery 7.4V Li-ion, 2200mAh - 16.2Wh
- Battery Powered Remote, Requires (1) x 'CR-2025', Included
- Power Supply: 120/240V (9V Power Adapter)
- Total Speaker Size (L x W x H): 13.77" x 12.6" x 20.47"-inches

### **FCC INFORMATION**

#### **WARNING:**

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

**NOTE:** This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This unit generates, uses, and can radiate radio frequency energy, and if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try and correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment to an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

**This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:**

1. This device may not cause harmful interference.
2. This device must accept any interference received, including interference that may cause undesired operation.

### **California Prop 65 Warning**

#### **WARNING:**

This product contains Lead and lead compounds which is known to the state of California to cause cancer birth defects and other reproductive harm. Do not ingest.

For more info go to: [www.P65warnings.ca.gov](http://www.P65warnings.ca.gov)

## WARNING



**DO NOT** place objects on top of the device, as objects may scratch the device.



**DO NOT** expose the device to dirty or dusty environments.



**DO NOT** insert any foreign objects into the device.



**DO NOT** expose the device to strong magnetic or electrical fields.



**DO NOT** use the device in the rain.



Please check with your local authority or retailer for proper disposal of electronic products.



**DO NOT** disassemble the device.

Only a certified service technician should perform repair.



**The device has apertures to disperse heat.**

**DO NOT** block the device ventilation; the device may become hot and malfunction as a result.

**Illegal operation may cause personal injury, which could be fatal, and may cause damage to property.**

## FEATURES


This system can be used with personal computers, mobile phone, DVD, VCD, CD, LD, TV, MP3, radio, electronic piano and any devices which have audio output. Amplifier circuit are using high-performance, high-fidelity design, coupled with high-quality professional speaker, in order to make the sound field to get positioned so clear, distinct levels effect. The sound system is outstanding, with deep and powerful bass and the treble effect is strong, with clear and bright pitch. The professional electronic frequency division circuit enhances the machine's crossover point effect. Using professional design and manufacture of high-capacity batteries, and dedicated audio power capacitors, to make the speaker's power reserve margin larger, more stable, better dynamics, higher signal to noise ratio.

## BUILT-IN BT FUNCTION

Press "**STANDBY/INPUT**" button to choose the input signal source as BT channel when starting the machine. Please ensure the BT devices you want to connect is open. Then scan and connect the speaker with the device. When the connection is successful, "tick" tone will prompt. If the speaker can't be connected, please restart the speaker or the device and try again. After the mobile phone and the BT are successfully connected, you can play music. To ensure continuous stability of the music signal, try to keep the BT and the mobile phone facing one another. This unit supports iPad, iPhone, Samsung, HTC, MOTOROLA, Nokia and other BT mobile devices wirelessly transmitting audio. It supports stereo playing of A2DP. The BT of the unit can be used up to 10 meters if there are no barriers.


## BACK PANEL FUNCTIONS

1. USB Control board
2. USB and Micro SD Card Slot
3. Master volume control knob
4. 3.5MM AUX input jack
5. Bass volume control knob
6. Treble volume control knob
7. Echo volume control knob
8. Microphone volume control knob
9. Charge LED indicator, red color is on charge mode, blue color is full charge mode.
10. DC 9V input jack
- 11 6.5MM microphone input jack
12. Extra DC 12V input
13. Power switch
14. LED light switch
15. FM antenna

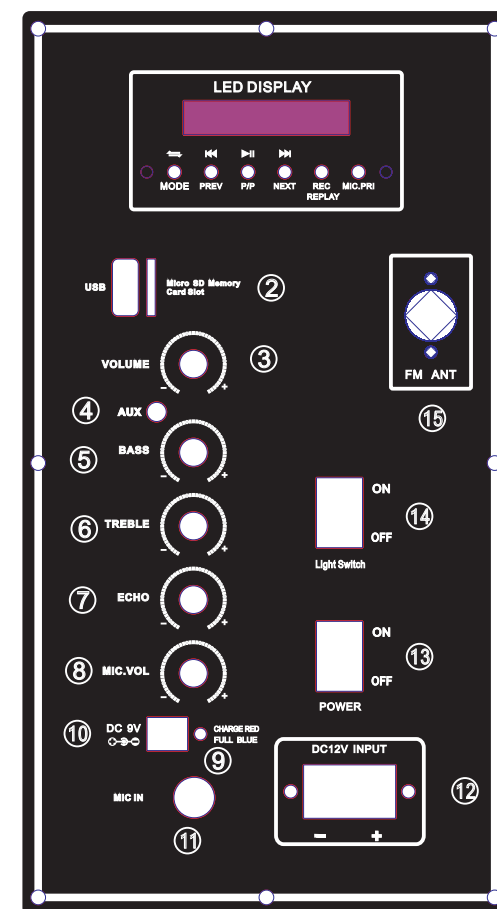

REMOTE CONTROL FUNCTIONS

- 1. Standby button
- 2. Input selector (AUX/FM/BT/USB)
- 3. Mute button
- 4. Play/Stop button (MP3 mode)/Scan function (FM mode)
- 5. Next song (USB/Micro SD mode)/Next channel (FM mode)
- 6. Previous song (USB/Micro SD mode)/Previous channel (FM mode)
- 7. EQ effect (MP3 mode)
- 8. Increase speaker volume
- 9. Direct song selection (MP3 mode)
- 10. Stop button
- 11. Decrease music volume
- 12. Repeat song (USB/Micro SD mode)

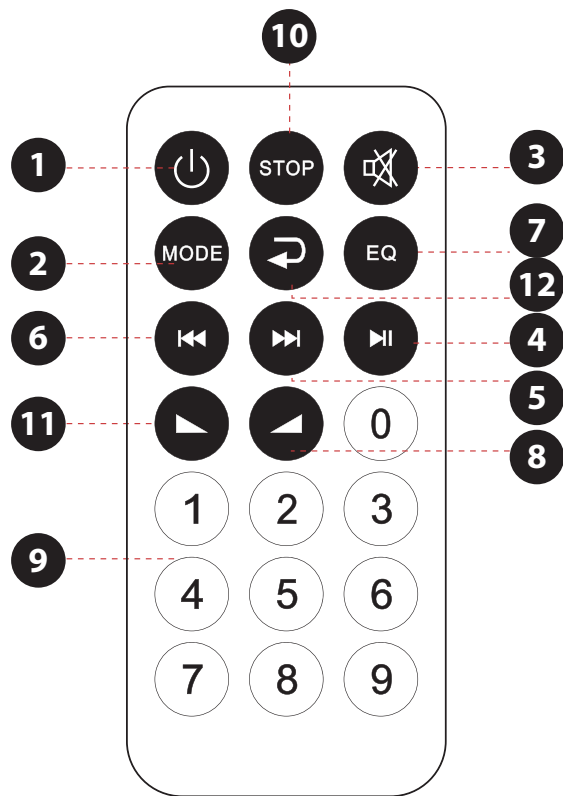

TROUBLESHOOTING

Issue	Possible Cause	Solution
No sound	1. No input sound source. 2. Volume is too low.	1. Connect a sound source. 2. Adjust the volume.
Distorted Sound	1. Volume is too high. 2. Speaker may be damaged	1. Lower the volume. 2. Repair or replace the speaker if damaged.
Karaoke does not work	1. Microphone plug is not fully inserted. 2. Microphone switch is off. 3. Microphone volume knob is turned down.	1. Plug the microphone securely into the socket. 2. Turn on the microphone switch. 3. Adjust the microphone volume.
MP3 does not play	1. Audio format on the USB drive is incorrect. 2. Improper operation has caused a process error. 3. USB drive is disconnected.	1. Convert the audio files to MP3 format. 2. Restart the device. 3. Reinsert the USB drive properly.

Register Product

Thank you for choosing PyleUSA. By registering your product, you ensure that you receive the full benefits of our exclusive warranty and personalized customer support. Complete the form to access expert support and to keep your PyleUSA purchase in perfect condition.

Start Here



Model Number:  
PPHP1044B

PyleUSA.com/pages/register