8BitDo

M30 Bluetooth gamepad — instruction manual

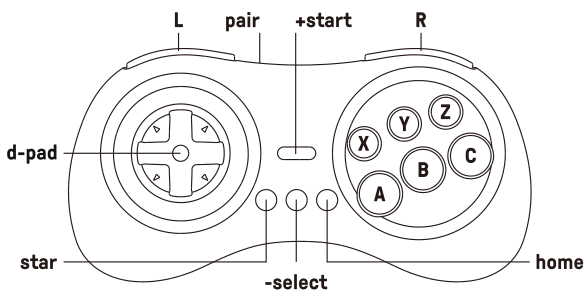

- press **start** to turn on the controller
- press & hold **start** for 3 seconds to turn off the controller
- press & hold **start** for 8 seconds to force turn off the controller

Switch

1 — press & hold **Y** & **start** to turn on the controller, LEDs start to rotate from left to right
2 — press & hold **pair** for 2 seconds to enter pairing mode, LEDs pause for 1 second then start to rotate again
3 — go to your Switch Home Page to click on Controllers, then click on Change Grip/Order. LEDs become solid when connection is successful
4 — controller will auto reconnect to your Switch with the press of **start** once it has been paired

- when connected to your Switch, **star** button = Switch Screen Shot button
- **home** button = Switch HOME button

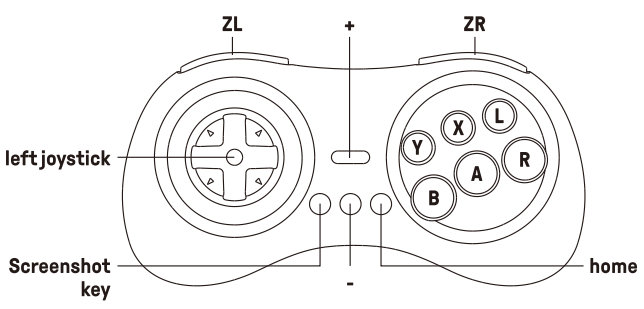

Android (D - input)

1 — press & hold **B** & **start** to turn on the controller, LED 1 blinks
2 — press & hold **pair** for 2 seconds to enter pairing mode, LED 1 pauses for 1 second then starts to rotate again
3 — go to your Android device's Bluetooth setting, pair with [8BitDo M30 gamepad]. LED becomes solid when connection is successful
4 — controller will auto reconnect to your Android device with the press of **start** once it has been paired

- USB connection: connect the controller to your Android device via USB cable after step 1

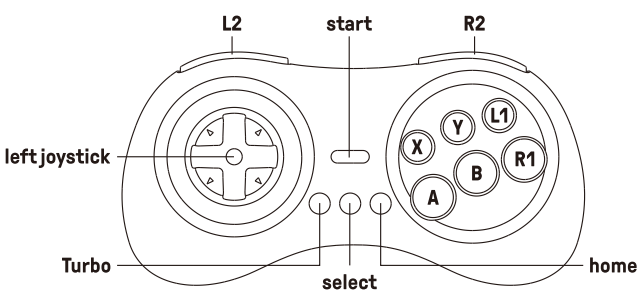

Windows (X - input)

1 — press & hold **X** & **start** to turn on the controller, LEDs 1 & 2 blink
2 — press & hold **pair** for 2 seconds to enter pairing mode, LEDs pause for 1 second then start to rotate again
3 — go to your Windows device's Bluetooth setting, pair with [8BitDo M30 gamepad]. LEDs become solid when connection is successful
4 — controller will auto reconnect to your Windows with the press of **start** once it has been paired

- USB connection: connect the controller to your Windows device via USB cable after step 1

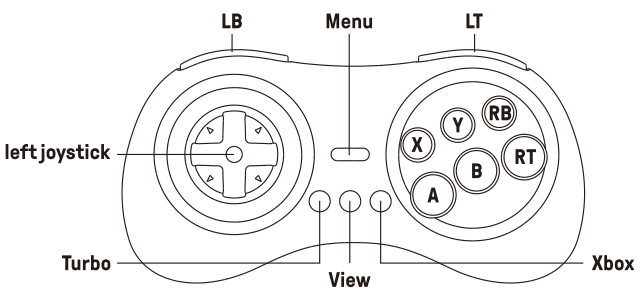

macOS

1 — press & hold **A** & **start** to turn on the controller, LEDs 1, 2&3 blink
2 — press & hold **pair** for 2 seconds to enter pairing mode, LEDs pause for 1 second then start to rotate again
3 — go to your macOS device's Bluetooth setting, pair with [Wireless Controller]. LEDs become solid when connection is successful
4 — controller will auto reconnect to your macOS device with the press of **start** once it has been paired

- USB connection: connect the controller to your macOS device via USB cable after step 1

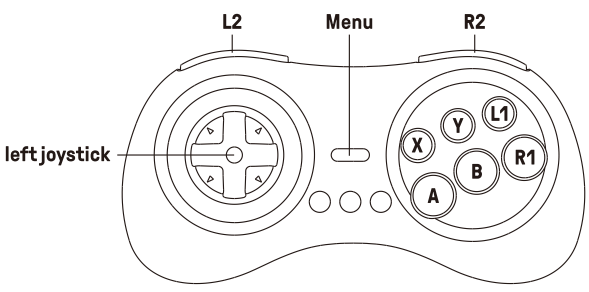

Turbo function

1 — hold the button you would like to set turbo functionality to and then press the **star** button to activate/deactivate its turbo functionality

- d-pad and analogue sticks are not included
- this does not apply to Switch

battery

status —	**LED indicator —**
low battery mode →	red LED blinks
battery charging →	red LED stays solid
battery fully charged →	LED turns off

- built-in 480 mAh Li-on with 18 hours of play time
- rechargable via USB-C cable with 1 – 2 hour charging time

power saving

- Sleep mode - 1 minute with no Bluetooth connection,
- Sleep mode - 15 minutes with Bluetooth connection but no use
- press **start** to wake up your controller
- controller stays on and connected on wired USB connection

support

- please visit support.8bitdo.com for further information & additional support

8BitDo

M30 蓝牙手柄 — 使用说明

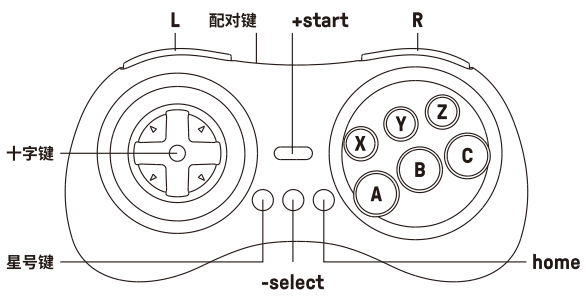

* 开机：按 [start] 键。
* 关机：按住 [start] 键 3 秒。
* 按住 [start] 键 8 秒可强制关机。

Switch

1. 按 [Y + start] 键开启手柄，指示灯滚动闪烁。
2. 按住 [pair] 键 2 秒进入配对状态，指示灯熄灭1秒后继续滚动闪烁，手柄进入配对状态。
3. 打开 Switch 主机 Controllers 设置，进入 Change Grip/Order 界面，等待手柄连接，连接成功后指示灯呈常亮显示。
4. 成功配对后，下次使用按 [start] 键可自动连接。

* 星号键功能为 Switch 截图键，home 键功能为 Switch home 键

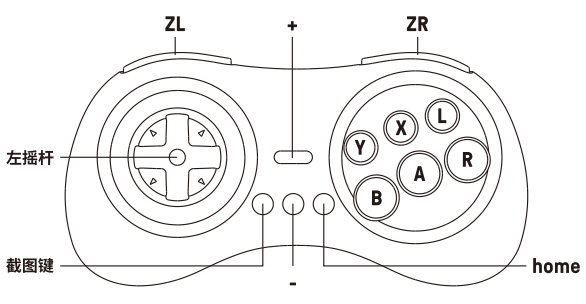

Android (D - input)

1. 按住 [B + start] 键开启手柄，1 号指示灯闪烁。
2. 按住 [pair] 键 2 秒，指示灯熄灭 1 秒后滚动闪烁，手柄进入配对状态。
3. 打开 Android 设备蓝牙，搜索 [8BitDo M30 gamepad] 设备，点击连接，连接成功后指示灯呈常亮显示。
4. 成功配对后，下次使用按 [start] 键可自动连接。

* USB 有线连接：请在第 1 步开启手柄之后，用 USB 线连接设备。

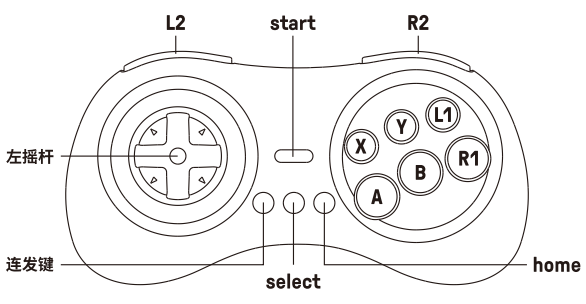

Windows (X - input)

1. 按住 [X + start] 键开启手柄，1、2 号指示灯同时闪烁。
2. 按住 [pair] 键 2 秒，指示灯熄灭 1 秒后滚动闪烁，手柄进入配对状态。
3. 打开 Windows 设备蓝牙，搜索 [8BitDo M30 gamepad] 设备，点击连接，连接成功后指示灯呈常亮显示。
4. 成功配对后，下次使用按 [start] 键可自动连接。

* USB 有线连接：请在第 1 步开启手柄之后，用 USB 线连接设备。

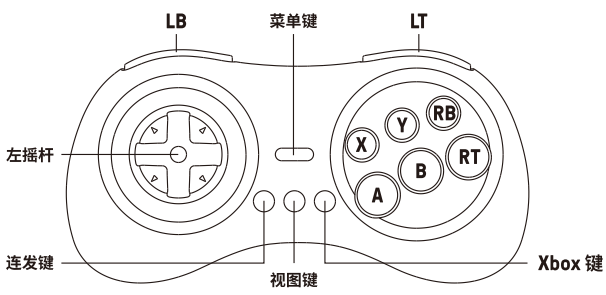

macOS

1. 按住 [A + start] 键开启手柄，1、2、3 号指示灯同时闪烁。
2. 按住 [pair] 键 2 秒，指示灯熄灭 1 秒后滚动闪烁，手柄进入配对状态。
3. 打开 macOS 设备蓝牙，搜索 [Wireless Controller] 设备，点击连接，连接成功后指示灯呈常亮显示。
4. 成功配对后，下次使用按 [start] 键可自动连接。

* USB 有线连接：请在第 1 步开启手柄之后，用 USB 线连接设备。

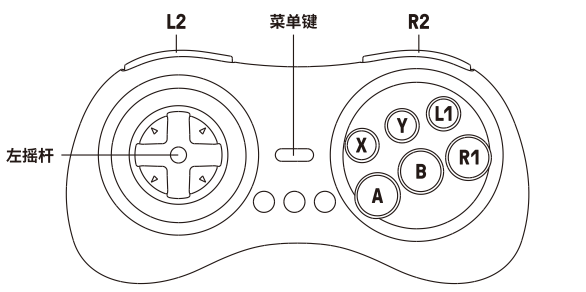

Turbo 连发功能

1. 按住需要设置连发的功能键，再按下星号键可开启/关闭按键的连发功能。

* 左、右摇杆与方向键不支持连发。
* 连接 Switch 时不可用。

电池

电量状态	指示灯状态
低电量 →	红灯闪烁
充电中 →	红灯亮
充电完成 →	指示灯熄灭

* 内置 480mAh 锂电池，可持续使用约 18 小时。
* 可使用配备的 USB - C 线进行充电，充电时间约 1 ~ 2 小时。

自动关机

* 开机后 1 分钟内无连接或连接后 15 分钟无操作会自动关机。
* 使用时按 [start] 键唤醒可自动连接。
* 使用 USB 连接时，手柄会保持开机。

固件升级

* 请访问 http://support.8bitdo.cn/ 了解详细信息。