


New Bee

Air Conduction Headphone H1

User Manual

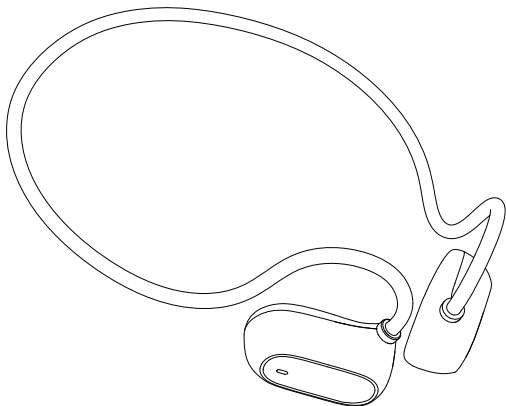


E-mail: support@anewbee.com
Website: www.anewbee.com

Thank you for choosing our product. Please read this user manual carefully and follow relevant rules before using the product to ensure correct, safe usage and keep it in good condition.


I . Product Overview

This is an air conduction headphone that provides an extra comfortable and safe wearing experience. It gives totally clear calls and superior sound quality even in noisy environment. In addition, this headphone has a stylish appearance and long battery life, which is a great choice for sports, hiking and driving.

II . Product Description

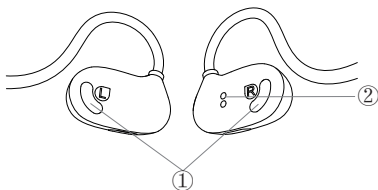

- ① Speaker
- ② Headphone Charging Contact Point
- ③ Headphone Indicator





- ④ Microphone
- ⑤ Multifunctional Key
- ⑥ Ear Hook Cable

III. Packing List

User manual×1
Headphonex1
Charging cabledx1


IV. Wearing Instruction

Hang the ear hook on the left ear and right ear separately. Make sure the sound outlet is aligned with the ear canal to achieve the optimal sound quality.



V. Usage and Operation

1. Pairing

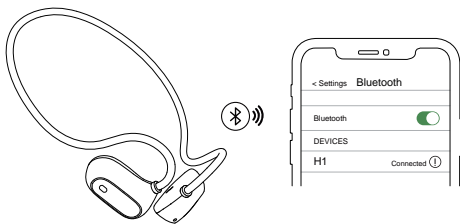

① Press and hold the multifunctional key for 3 seconds to turn on the headphone and the headphone will emit the voice prompt of "power on". Later, the headphone will emit the voice prompt of "pairing", it means the headphone is in pairing state.

② Open the Bluetooth function of cellphone to search for Bluetooth devices, find "H1" in the list of Bluetooth devices and click to connect. When hearing the voice prompt of

“connected”, it means the connection is successful and the headphone indicator goes out.

③ When using the headphone again, it automatically connects to the last device. If there is no paired device within 5 minutes, the headphone will automatically turn off.

④ If the pairing fails, please delete all pairing records of "H1". Turn off the Bluetooth function of cellphone, then turn on the Bluetooth function again and search.





2. Two Devices Connection




This headphone can connect to two smartphones at the same time.

Operation Steps: After successfully connecting to phone A, turn off the Bluetooth function of phone A and headphone. Next, restart the headphone and connect to phone B. Then turn on the Bluetooth function of phone A, find the "H1" in the list of Bluetooth devices and click to connect. (**NOTE:** Although the headphone can connect to two phones at the same time, only one of the phones can play music through H1.)

3. Touch Function Description

NOTE: Only the right side headphone has touch control function.

Pic.	Function	Operation
 R		Power On: ① Pull out the charging head and the headphone will automatically turn on. ② Press and hold the multifunctional key for 3 seconds in the shutdown state. Power Off: ① The headphone will automatically turn off when charging. ② Press and hold the multifunctional key for 5 seconds in the power-on state.
		Play/Pause: In the music playing state, double click the multifunctional key.
		Answer A Call: Double click the multifunctional key when there is an incoming call.

		Hang Up: Double click the multifunctional key during a call.
		Reject A Call: Press and hold the multifunctional key for 2 seconds when there is an incoming call.
		Voice Assistant: Triple click the multifunctional key.

4. Headphone Indicator / Voice Prompt


Definition	Headphone Indicator Status	Voice Prompt
Power on	Blue light is on for 1 second	Power on
Power off	Red light is on for 1 second	Power off
Enter pairing mode	Flashing red and blue alternately	Pairing
Connected	The headphone indicator goes out	Connected
Disconnect	Flashing red and blue alternately	Disconnected
Answer a call	Keep flashing slowly in blue	du
Hang up	Red light is on for 1 second	du
Reject a call	Red light is on for 1 second	du
Restore factory settings	Blue light is on for 1 second, then turns into red and blue flashing alternately	Pairing
Play	/	/
Pause	/	/
Voice assistant	/	du

5. Restore Factory Settings

If the headphone is abnormal in use, please restore it to factory settings.

Operation: Click the multifunctional key eight times consecutively. When hearing the voice prompt "pairing", it means the headphone has been restored to factory settings.

6. Charge the Headphone

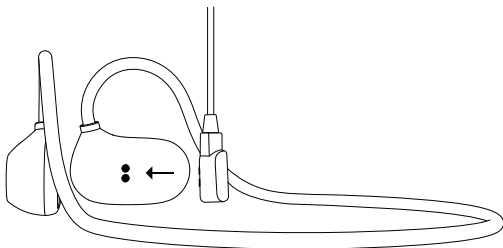

The headphone emits the voice prompt of "low battery" and the headphone indicator keeps flashing slowly in red, indicating that the headphone is on low battery state. Please charge the headphone immediately.

Connect the pogopin of the charging cable to the headphone charging contact point to charge the headphone. When charging, the headphone indicator is red. When fully charged, the headphone indicator turns blue.

NOTE: When charging, please keep the headphone charging contact point dry and no foreign body.

VI. Product Specifications

- Product model: H1
- Version: V5.3
- Supported protocol: HFP/HSP/A2DP/AVRCP
- Speaker specification: $\Phi 16.2\text{mm}$

- Transmission range: 10m
- Battery capacity: 100mAh
- Charging time: 1.5 hours
- Charging method: magnetic pogopin
- Playback time: about 6 hours
- Standby time: about 6 months
- Working temperature: -5℃~50℃
- Waterproof level: IPX5

VII. Common Problems

1.The headphone cannot be turned on.

—— Please try to charge it first, then try to turn on the headphone when the battery is sufficient. Check whether the headphone indicator is red when charging.

—— Make sure the position of touch control is correct.

2.The connection is abnormal.

—— Please restore the headphone to factory settings and reconnect it. (Click the multifunctional key eight times consecutively. When hearing the voice prompt “pairing”, the headphone has been disconnected.)

3.The headphone cannot be charged.

—— Please try to replace another 5V output power adapter to charge.

—— Make sure the headphone charging contact point is dry and no foreign body.



Happy?

Thank you for choosing our products! We sincerely hope it will be your new-found happiness.

If you are fully satisfied with your using experience, could you please kindly share to your friends?

We also engage with our fans to learn how we can do better by offering free pre-release products. If you are interested, do not hesitate to follow us on



Facebook: **NewBeeBrand**



Website: **<https://www.anewbee.com>**



Not Happy?

If you have any questions, concerns, or just not satisfied with our products, please feel free to contact us through e-mail at:

✉ E-mail: **support@anewbee.com**

☎ Tel: (USA) **1-626-701-7623** (UK) **07845854035**

📍 Address: 3rd Fl, Bldg E, Guanghao Ind., No. 23, Yunfeng Rd, Dalang St., Longhua Dist., Shenzhen City, Guangdong Prov., China

Warning:

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help

NOTE: This device and its antenna(s) must not be co-located or operation in conjunction with any other antenna or transmitter

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.