




LED CONVEX EDGELESS SERIES

LED-CP5D
LED-CP7D
LED-CP9D

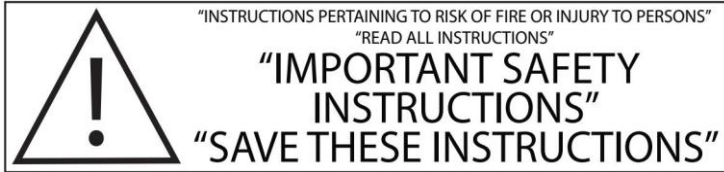

TOOLS AND MATERIALS REQUIRED:



Phillips
Screwdriver



Wire Cutters



Pliers


Wiring supplies
as required by
your local
Provincial or State
Electrical code

SAFETY PRECAUTIONS:

1. TURN OFF ELECTRICAL POWER BEFORE STARTING INSTALLATION OF LIGHT FIXTURE.
2. THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.
3. CAUTION-RISK OF ELECTRIC SHOCK. CONSULT A QUALIFIED ELECTRICIAN TO ENSURE CORRECT BRANCH CIRCUIT CONDUCTOR.




PACKAGE CONTENTS

PART	DESCRIPTION	QTY
A	LED disc light	1
B	Mounting screws	2
C	Wire nut	3
D	Mounting plate	1

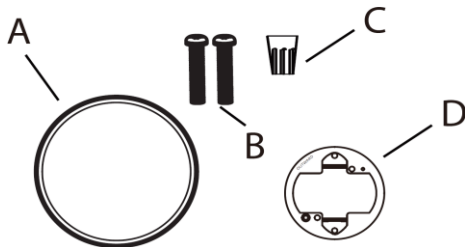

FLUSH MOUNT

This LED light is compatible to be dimmed by
LEVITON# 6633, LEVITON# 6672, LEVITON# 6631,
LEVITON# 6674, LUTRON# DVCL-153P,
LUTRON# MACL-153M, LUTRON# CTCL-153P,
LUTRON# CTCL-153PD, LUTRON# TGCL-153P.
Dimmer compatible for 120V line volt. 277V is non-dimmable.
Dimming levels will vary by dimmer.



1. Prior to installation, install mounting plate into the electrical junction box with mounting screws. Drive screws completely to the end of the junction box.
2. Connect supply wires to wires on fixture with wire nuts. Connect white to white, black to black, and copper wire to copper wire as grounding connection.
3. Complete the installation by pushing the fixture springs towards the opening in the mounting plate installed on the junction box.