

60" LED Mirror

Size: 1500*750*35MM



Touch Screen Mirror with Integrated Bluetooth
Installation • Operation • Safety • Warranty



Energy-Saving
LED Lighting



Integrated Touch
Screen Interface



Bluetooth Audio
Connectivity



Smart Defogger
Function



Modern Frameless
Design



Digital Clock &
Temperature Display




Multi-function
control screen

60" LED Mirror


Touch Screen Mirror with Integrated Bluetooth

Size: 1500*750*35MM

PRODUCT FEATURES

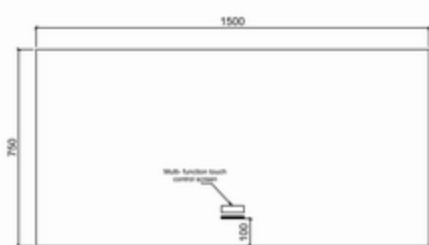

Front View

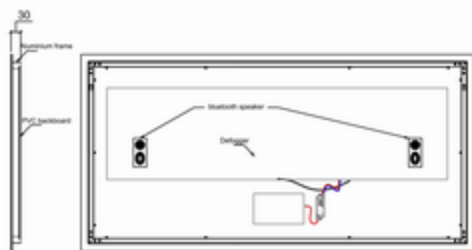

Side View

Back View

- 60" LED Mirror with built-in defogger
- Modern Frameless Design with dimming function
- Anti-Fog Function
- Energy-efficient LED Lighting
- Integrated Touch Screen Interface
- Bluetooth Audio Connectivity
- Digital clock and temperature
- 5mm copper-free silver mirror provides superior clarity and corrosion resistance
- Backlit 6000K LED lighting delivers professional-grade illumination
- UL-certified LED driver (110V) ensures safe, reliable operation

60" LED Mirror

Touch Screen Mirror with Integrated Bluetooth

Size: 1500*750*35MM

QUICK START

1. Turn OFF power at the breaker (verify with tester).
2. Locate studs and mark centerline
3. Install hanging bar/brackets level.
4. Make hard-wired electrical connections.
5. Hang mirror; lock-catch for horizontal mount.
6. Restore power; test touch sensors (light, anti-fog, etc).

SAFETY & COMPLIANCE

- Installation by a licensed electrician only.
- Connect to a GFCI-protected, properly grounded circuit (120 V~ 60 Hz).
- Do not connect to any wall dimmer (ELV/triac). Use a standard ON/OFF switch if desired; dimming happens on the mirror.
- Two-person lift required; use PPE.
- Mount into wall studs whenever possible; use proper anchors for wall type.



DANGER



GFCI Protected



No wall dimmer



Ground properly



Two-person lift



PPE

60" LED Mirror

Touch Screen Mirror with Integrated Bluetooth

Size: 1500*750*35MM

WHAT'S IN THE BOX & TOOLS

INCLUDED



Mirror
assembly



Hanging
bar



Wall
screws
(x2)



Anchors
(x2)

TOOLS NEEDED



Band
tap



Level



Pencil



PPE



Drill
bits



Electronic
drill



Cross
screwdriver



Stud
finder

HARDWIRE INSTRUCTIONS

Warning: Manufacturer's warranty shall be void if product is not installed by a licensed professional

Prior to commencing installation, please ensure the following:

- The wall where the product is being installed is able to support the weight of the product
- The main electrical supply has been powered off to complete installation

IMPORTANT: Wiring Instructions for Canada & USA



This fixture's wiring colors may not align with standard North American guidelines. For a safe installation, please re-identify the fixture wires with electrical tape as follows:

LIVE: Wrap black tape on the fixture's White wire. Connect this to your home's Black (Live) wire.

NEUTRAL: Wrap white tape on the fixture's Black wire. Connect this to your home's White (Neutral) wire.

GROUND: Connect the Green wire to your home's Green or Bare Copper ground wire.

Please consult a licensed electrician if you are unsure.

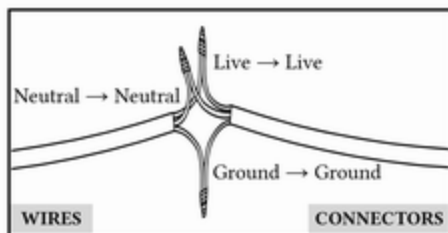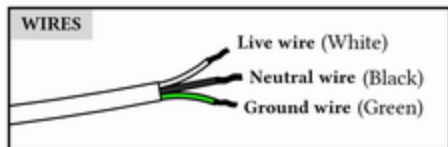

Important


- Hard-wire only. Do not attach a cord-and-plug.
- Use listed wire connectors; make all splices inside approved boxes.
- Do not use a wall dimmer. Use a standard ON/OFF switch if wall control is required.

60" LED Mirror

Touch Screen Mirror with Integrated Bluetooth

Size: 1500*750*35MM

WALL MOUNTING INSTRUCTIONS

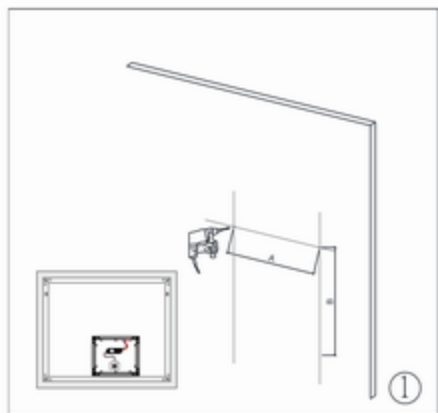

Measure the distance of the mounting hole.
Drill holes with a suitable sized drill.



Insert the anchor and mounting screw into the wall.



Connect the mirror wires with your main wires and hang the mounting hole to the screw on the wall.




Peel off protective film and clean the mirror with damp cloth.







60" LED Mirror

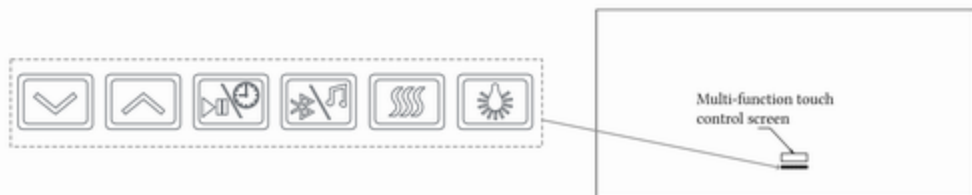Touch Screen Mirror with Integrated Bluetooth

Size: 1500*750*35MM

OPERATION & FEATURES



-  Touch this button in order to turn the lighting ON/OFF.
Touch and hold this button in order to dim the light intensity.
-  Touch this button in order to turn the defogger ON/OFF.
-  Touch this button in order to turn the Bluetooth speaker ON/OFF.
-  Using a short touch this button controls Play and Pause functionalities.
Press and hold this button to engage the clock's program mode.
In program mode, the clock will go through all 4 number fields with a 3 second break in between. To set the time, press the button again while the number field is flashing.
-  Touch this button to play next song.
Touch this button and hold for 3 second to make the volume higher.
-  Touch this button to play next song.
Touch this button and hold for 3 second to lower the volume.

60" LED Mirror

Touch Screen Mirror with Integrated Bluetooth

Size: 1500*750*35MM

CARE & CLEANING AND TROUBLESHOOTING

CARE & CLEANING



Wipe with a soft, lint-free cloth; mild non-ammonia cleaner.



Do not use abrasives, pads, acids, or solvents.



Apply cleaner to cloth, not directly on sensor areas.

TROUBLESHOOTING (QUICK FIXES)



No light at install: Confirm breaker ON, correct wiring, internal quick-connects fully seated.



Touch unresponsive: Power cycle at breaker for 60 seconds; clean/dry glass over sensors.



Buzz/Hum: Ensure unit is not on a wall dimmer; verify solid ground.



Anti-fog not warming: Ensure left sensor is ON; feature auto-turns-off after 1 hour.