


TO UPDATE THE CONNECT 22 CONSOLE YOU WILL FIRST NEED TO PREPARE A USB FLASH DRIVE. DELETE ANY AND ALL FILES OFF THE USB FLASH DRIVE. THEN CLICK TO DOWNLOAD THE SOFTWARE UPDATE FILE: [CONNECT 22 UPDATE](#) THIS FILE (UPDATE.ZIP) SHOULD BE IN YOUR DOWNLOADS FOLDER ON YOUR COMPUTER. MAKE SURE THE FILE NAME IS "UPDATE.ZIP". MODIFY THE FILE NAME IF NECESSARY. DRAG & DROP OR COPY THE UPDATE.ZIP FILE TO THE USB DRIVE. THEN PLUG THE USB INTO THE CONNECT 22.





### STEP 1

UNPLUG THE POWER CABLE FROM THE CONNECT 22. MAKE SURE THE USB IS INSTALLED IN THE CONNECT 22. THEN PLUG THE POWER CORD BACK INTO THE CONNECT 22. THE CONNECT 22 WILL BOOT UP AND THIS MESSAGE WILL APPEAR. (THIS COULD TAKE SEVERAL MINUTES. THE FILE IS LARGE.)




THEN SELECT INSTALL.  
(THIS COULD TAKE SEVERAL MINUTES)

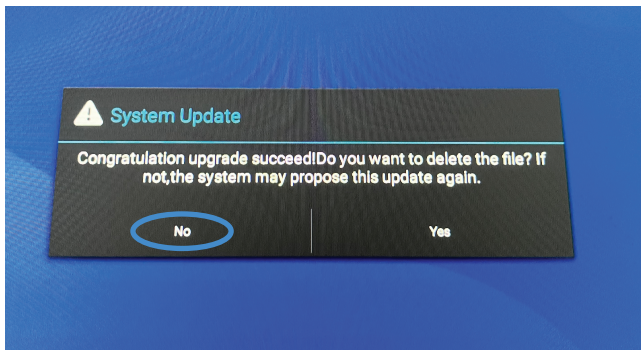


### STEP 2

LET THE TABLET UPDATE. (THIS COULD TAKE SEVERAL MINUTES) YOU WILL SEE A BLACK SCREEN WITH A PROGRESS BAR (SHOWN BELOW)



WHEN THE UPDATE IS DONE YOU WILL SEE THE SCREEN TO THE LEFT. SELECT **NO**. THEN **IMMEDIATELY** REMOVE THE USB DRIVE.

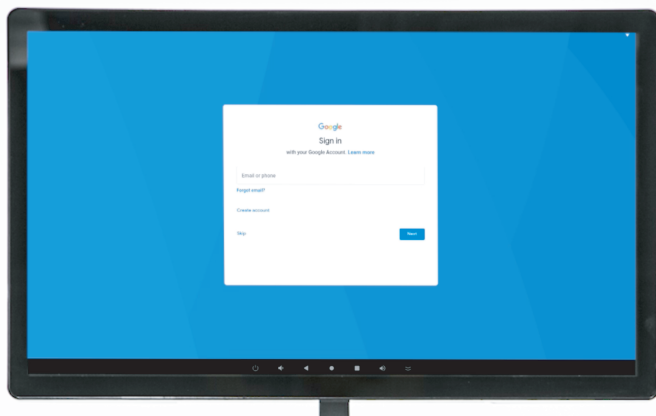

### STEP 3

YOU WILL NEED TO PERFORM A FACTORY RESET FOR THE FINAL STEP. FIRST GO THROUGH THE INITIAL SETUP PROCESS.

**SKIP** THROUGH ALL OF THE STEPS THAT PROVIDE A SKIP OPTION.

NEXT YOU WILL PERFORM A FACTORY RESET.

- (CLICK TO SHOW) [HOW TO PERFORM FACTORY RESET](#)

AFTER THE RESET, FOLLOW ALL PROMPTS FOR THE FINAL INITIAL SETUP.

- (CLICK TO SHOW) [FINAL INITIAL SETUP STEPS](#)

THEN YOU'RE ALL SET!

For More Information  
Please Scan The QR Code:

