

USER GUIDE

UL COB STRIP LIGHT KIT



IMPORTANT SAFETY INFORMATION

WARNING: Do not stare directly at the LED chips. Eye damage may occur.

CAUTION:


- Do not power the LED strip while coiled on reel.
- Ensure correct polarity for 12-volt connections: (+) to (+), (-) to (-).
- Do not install low-voltage wiring next to AC power lines. Maintain a 90-degree angle if they cross.
- Secure cables and wires with insulated staples, plastic ties, or clips.
- Use only the provided DC 12V power supply. Avoid bending, crushing, or pulling the cable. Protect from sharp edges, oil, and heat.
- Securely fasten connectors before operating.

Disposal: Electrical waste should not be disposed of with household waste. Recycle responsibly at designated facilities.

WHAT YOU GET


16.4ft COB Strip Light	1
Controller	1
Wireless Remote	1
48W Power Adapter	1
Double Head Connector	1
Wire Clips	2

CONNECTION DIAGRAM

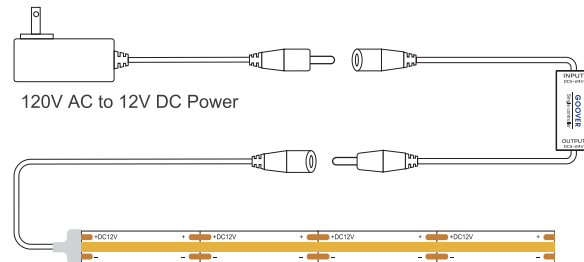


REMOTE FUNCTIONS

The included remote controller lets you easily adjust the brightness of your lights to create the perfect ambiance.

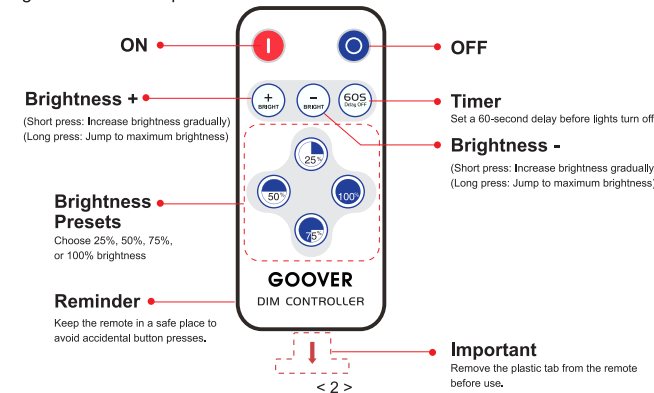

Connector: (Optional: Use for Custom Bends)




Match the "+" signs: Ensure the "+" sign on the LED strip aligns with the "+" sign on the connector.


Gently press and secure: Carefully press the strip into the connector until the prongs make a firm connection. Apply gentle pressure to ensure a good fit.

CONNECTOR INSTALLATION

1 OPTIONAL: If using connectors cut the strip light across indicated lines.

**IMPORTANT:**

If using the connector, match wire colors and polarity markings on the strip to those on the connector. Ensure that the "+" and "-" signs align correctly.

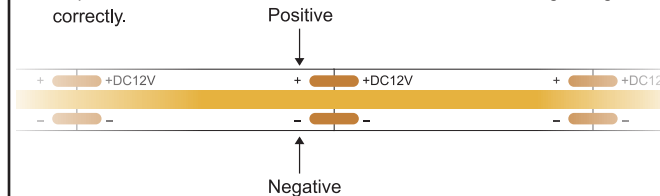


Gently press and secure: Carefully press the strip into the connector until the prongs make a firm connection. Apply gentle pressure to ensure a good fit.

- 2 Clean surface where you intend to install the GOOVER LED Strips.
- 3 Remove the backing from the light strip to reveal adhesive tape.



- 4 Press down and run the strip in a straight line onto the surface.
- 5 Use mounting clips if needed to make power source wire and strips stable.



< 4 >

- 6 Use connector included if needed to extend LED strips around corner.
- 7 Power on to ensure your new led strip lights up and functions properly.



TROUBLESHOOTING

Lights not turning on?

- Double-check the connection between the strip and the power source.
- Remember: GOOVER LED strips require a 12V DC power source.
- If using a controller, ensure it's switched on.

Lights not lighting up?

- Verify the power source's voltage. It must be 12V DC for proper function.
- Anything below the required voltage (12V DC) may result in lights not lighting up.

Adhesive tape not sticking?

- Thoroughly clean the mounting surface with rubbing alcohol or a similar cleaner.
- Mounting tape may not adhere effectively to certain surfaces like wood, stone, or rough materials.
- Try these alternatives: GOOVER Foam Tape, Mounting Clips, or An adhesive suited to the material in question.

< 5 >

WARNING! DO NOT CONNECT DIRECTLY TO HIGH VOLTAGE POWER!
Read all warnings and installation instructions thoroughly.


HANDLE LED STRIP LIGHT WITH CARE!



DO NOT BEND LED STRIP LIGHT TO A DIAMETER LESS THAN 1.5 INCHES.



DO NOT FOLD, CREASE, OR TWIST LED STRIP LIGHT.




DO NOT BEND LED STRIP LIGHT ON A HORIZONTAL PLANE.



DO NOT PUT EXCESSIVE PRESSURE ON SURFACE OF STRIP LIGHT (GLASS / ACRYLIC PANES, ETC.)



DO NOT COVER STRIP LIGHT WITH ANY MATERIALS.



DO NOT POWER STRIP LIGHT WHILE ATTACHED TO SPOOL OR TIGHTLY COILED.

< 6 >

GOOVER

Three-year warranty

Have any questions or concerns?
Please contact us!

✉ service@gooverlight.com

< 7 >