



PRODUCT FEATURES

- Super high power 1750 lumen white COB LED, 6500k
- With Red LED modes for emergency / signalling / night vision
- Built-in USB power bank with multiple intelligent outputs - 5V-3A/9V-2A/12V-1A
- Super tough copolymer and aluminum construction
- Glow-in-the-dark strip around reflector for extra visibility
- 180° rotating handle/stand with carabiner snap hook
- Strong magnets within the stand
- IPX5 water resistant
- Super high power 'LG' 10,400mAh li-ion battery
- Battery level and charging indicator LEDs
- Faster 4 or 4.5 hour USB-C charging with multiple inputs - 5V-3A/9V-2A
- 3.2ft high quality USB-C cable included

BATTERY - 3.7v 10400mAh Li-ion Rechargeable Battery

WEIGHT - 21.1oz

DIMENSIONS - folded 4 x 6.2 x 2.1in
extended 4 x 10.5 x 1.8in

ADVICE & IMPORTANT INFORMATION!

- LEDs will become hot when switched on; do not touch and never place face down on any surface – risk of fire! Even once the lamp has been switched off, DO NOT place face down as the LED/Lens will stay hot/warm for a while.
- Do not look directly at LEDs.
- Do not operate in direct sunlight or extreme temperature conditions (below -4°F or above 140°F).
- Do not use the device if there is any visible damage.
- Take care when using a USB plug adaptor, check for any damage. DO NOT exceed the stated charging inputs or damage may occur to the battery.
- New rechargeable batteries will reach full performance after a few complete charging and discharging cycles.
- To keep rechargeable batteries in optimum condition, they should be recharged every 3-6 months, especially if it is not being used for a long period of time.
- Always fully charge batteries before storage.
- Always protect lithium batteries from heat, intense sunlight, fire, water and moisture – danger of explosion!
- If a battery is damaged, fluids can leak out. AVOID contact as this can lead to skin irritation and/or burns. If skin contact occurs, rinse thoroughly with water. If irritation persists, seek medical advice. Seek immediate medical assistance if lithium battery fluid comes into contact with the eyes.
- Children under 12 years of age should only use the product under adult supervision.
- Do not open, disassemble or attempt to modify the product; this will void the warranty and can be dangerous. Improper use or modification is not covered under the warranty.
- Take care to avoid lenses coming into contact with hard/sharp objects, damage or scratches on lenses will affect light output.
- This product is water resistant to IPX5 – DO NOT SUBMERGE. If the product has been subjected to excessive moisture/water the warranty may be void.
- This product has a 1 year standard warranty (or extended to 2 years once registered online at WWW.UNILITE.CO.UK) against manufacturing faults and defects. It does not cover normal wear and tear, modifications, accidental damage or poor maintenance. Unilite warranties do not cover battery leaks or the use of incorrect chargers and cables that can damage batteries.
- Do not dispose of this device in normal household waste. It must be disposed of via an authorised electrical appliance disposal centre or at your local waste disposal unit.
- Please recycle packaging responsibly.
- Keep these instructions for future reference or for subsequent possessors.

ANSI FL1 Standard



White - Super Bright	1750 Lumen	164ft	4.5H
White - High	675 Lumen	104ft	8.5H
White - Medium	330 Lumen	72ft	21H
White - Low	55 Lumen	26ft	138H
Red - High	50 Lumen	--	26H
Red - Flashing	--	--	195H

OPERATING INSTRUCTIONS

Press the button on the side of the lamp to activate.


When ON in either White or Red mode, press and HOLD the button to change to the other mode.

Mode Sequence:-

WHITE: Super Bright > High > Medium > Low > Off

RED: High > Flash > Off

[If left ON in any mode for over 3 seconds, the next press will turn off]

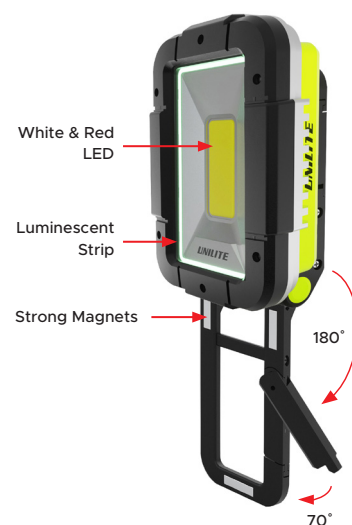

RECHARGING

1. Only use a USB-C charging cable.
2. Lift the charging port cover on the top of the lamp.
3. Plug the USB-C end of the cable into the USB-C charge port.
4. Plug the USB-A end of the cable into a USB charging port (do not exceed 5V-3A or 9V-2A charging input or damage may occur to the internal battery).
5. 4 x Blue LEDs will flash to indicate charging. Once fully charged all LEDs will light up constantly.
6. Charge Time: 5V-3A = 4 hours or 9V-2A = 4.5 hours (lower Amp charging will take longer)

(PRODUCT CAN BE USED WHILE RECHARGING)

****Warranty void if not used with the stated charger specifications****

