

gemini[®]



GTL-15PK



GTL-215

GTL SERIES MANUAL

BLUETOOTH PA SPEAKER WITH LIGHTUP CABINET

©2023 Innovative Concepts & Design LLC. All Right Reserved.
Bluetooth[®] is a registered trademark of Bluetooth SIG Inc.
Product Specifications and colors may vary from photo.

Manufactured and serviced by:
Innovative Concepts & Design LLC
458 Florida Grove Road
Perth Amboy, NJ 08861 USA
(732)587-5466

geminisound.com

INDEX

What's Included	2
Precautions	3
Introduction	4
Product Overview	5
Remote Control	7
Operations	8
Specifications	9
FCC Compliance Statement	10
Legality & Safety	11
Warranty Info	12
Manual en Español	13

What's Included

- 1 x GTL Series PA Speaker
- 1 x IEC Power Cable
- 1 x Wired Microphone
- 1 x User Manual
- 1 x Tripod Speaker Stand (GTL-15PK only)

PRECAUTIONS

PLEASE READ INSTRUCTIONS GIVEN IN THIS MANUAL AND THOSE MARKED ON THE UNIT

This set has been designed and manufactured to assure personal safety. Improper use can result in electric shock or fire hazard. The safeguards incorporated in this unit will protect you if you observe the following procedures for installation, use and servicing. This unit is fully transistorized and does not contain any parts that can be repaired by the user.

WARNINGS

Fire and electric shock hazard

- 1 - Do not place any open flame sources, such as lighted candles, on or near the apparatus.
- 2 - Do not attempt to service the apparatus yourself.
- 3 - Opening or removing covers may expose you to dangerous voltages or other hazards and will void the manufacturer's warranty.
- 4 - To prevent risk of fire or electric shock, avoid overloading wall outlets, extension cords, or integral convenience receptacles.
- 5 - Lightning storms Unplug this apparatus during lightning storms.
- 6- Object and liquid entry: Never insert objects of any kind through the openings of this apparatus, as it may touch dangerous voltage points or short-circuit parts that could result in a fire or electric shock. Care should be taken so that objects do not fall and liquids are not spilled into the apparatus through openings in the enclosure

Battery charging

- 1 -To reduce the risk of fire or electric shock, do not expose the apparatus to rain or moisture while charging.
- 2 - The apparatus should not be exposed to dripping or splashing; and objects filled with liquids, such as vases, should not be placed on or near it while being charged.
- 3- Do not continue charging the battery if it does not reach full charge within the specified charging time. Overcharging may cause the battery to become hot, rupture, or ignite.
- 4 - Do not attempt to charge the battery in temperatures outside the range of 32°-104°F(0°-40°C).
- 5 - If you see any heat deformation or leakage, properly dispose of the battery.
- 6 - If the battery begins to leak, do not allow the liquid to come into contact with your skin or eyes. If contact has been made, wash the affected area with plenty of water and seek medical attention immediately.

INTRODUCTION

The GTL Series speakers combine powerful sound with stunning visual effects, making them perfect for parties, events, and professional audio setups. With Bluetooth® connectivity, True Wireless Stereo (TWS) linking, and multiple input options, these speakers offer versatility and ease of use for various scenarios.

Both the GTL-15PK and GTL-215 feature striking translucent cabinets that allow the integrated LED party lighting to shine through, lighting up the entire speaker. This dynamic lighting adds energy to any event and syncs with your music, creating an immersive audio-visual experience.

The GTL-15PK includes a 15-inch woofer and comes with a speaker stand, while the GTL-215 features dual 15-inch woofers for enhanced bass. Both models include RCA, XLR, and ¼-inch inputs, making them ideal for public speaking, live performances, or music playback. Pair your Bluetooth® devices wirelessly and enjoy high-powered, clear sound and impressive visuals wherever you go.

IMMERSIVE SOUND

Enjoy rich, full-range audio from powerful woofers (15" for GTL-15PK, dual 15" for GTL-215) and high-efficiency Class A/B amplifiers, delivering deep bass and crystal-clear highs.

LED PARTY LIGHTING

Light up the party with built-in LED lights that shine through the translucent cabinet. Choose from 5 lighting modes and 7 vibrant color options to match any mood.

SEAMLESS WIRELESS PAIRING

Bluetooth 5.0 with TWS (True Wireless Stereo) allows you to wirelessly pair two GTL Series speakers for an immersive stereo experience, perfect for larger events.

VERSATILE MEDIA PLAYER

Supports Bluetooth, SD card, USB, and FM radio playback, all accessible through a user-friendly digital display. Enjoy your music your way!

RUGGED AND PORTABLE DESIGN


Durable, party-ready translucent cabinet with built-in wheels for easy transport. The GTL-15PK includes a speaker stand for optimal sound projection at any venue.

PRODUCT OVERVIEW

1. Control Panel

- a. SD CARD: Insert memory card to playback your stored music.
 - b. USB: Insert a USB storage device to play back your stored music.
 - c. MODE: Press to select LINE (Aux-in)/ BLUETOOTH /FM.
 - d. Repeat / EQ: Short press to repeat the track. Long Press to select EQ modes.
(EQ modes: Normal / Classical / Jazz / Pop / Rock).
 - e. ⏮/VOL-: Short press for previous song, long press for volume down.
 - f. ⏭/VOL+: Short press to skip to next song, long press to increase volume.
 - g. ▶||/TWS: In USB/SD/BT mode short press to Play & Pause the music. In FM mode, press to auto search and store radio stations. Long press for TWS pairing.
2. **TREBLE**: Rotate knob to adjust treble settings to your desired levels
 3. **MEDIA PLAYER VOLUME**: In USB/SD/FM/BT mode; rotate the knob to adjust volume to your desired level.
 4. **AUX INPUT**: Connect external audio device via 1/8" Aux cable
 5. **BASS**: Rotate the knob to adjust BASS to your desired level.
 6. **BALANCED LINE OUT**: Send master audio mix to second speaker or recording device
 7. **MASTER VOLUME**: Controls the volume of the speaker.
 8. **MIC IN VOLUME**: Rotate the knob to adjust the MIC volume to your desired level.
 9. **LINE IN VOLUME**: Rotate the knob to adjust the LINE volume to your desired level.
 10. **RCA INPUT**: Connect to external device via stereo RCA cables
 11. **¼" MIC INPUT**: Insert your microphone with ¼" cable
 12. **XLR LINE INPUT**: Connect external device with XLR cable
 13. **XLR MIC INPUT**: Insert your microphone with XLR cable
 14. **AC Power**: Connect the IEC power cord to speaker and plug in to the main wall outlet.
 15. **POWER**: Press to switch on /off the speaker.
 16. **LED Switch**: Press to switch on /off the lights.

REMOTE CONTROL

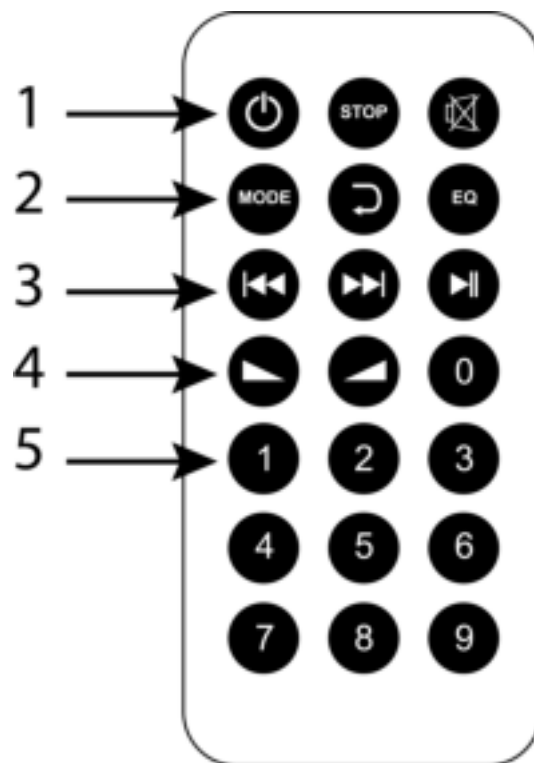

1. **POWER:** When the Power switch on the unit is ON, press the Power button on remote control and unit will go in STANDBY mode. Press power button again and it will resume to normal mode.
STOP: In SD Card and USB mode press to stop the media being played.
MUTE: Press to mute music in any mode, press again to resume sound.
2. **MODE:** Press repeatedly to select the following modes LINE IN (AUX IN)/USB/TF CARD / FM Radio/Wireless BT.
REPEAT: Press to repeat one song or repeat all songs.
 In Wireless BT mode, this button has no function.
EQ: Press to switch between the different EQ modes. This works only in USB/SD card mode. (EQ modes: Normal/Classical/Jazz/POP/Rock).
3. **⏮** In USB/ SD card and AUX mode press once to go back to the previous song; press and hold for 3 seconds to rewind the current song.
 In Bluetooth "BT" mode, press once to go back to the previous song.
 In FM mode, press once to go back to the previous channel.
⏭ In USB/SD card and AUX mode press once to go to the next song, press and hold for 3 seconds to fast forward the current song.
 In BT mode, press once to go next song.
 In FM mode, press once to go to next channel.
⏸ In all modes, press to pause the music. Press again to resume play.
4. **VOL -:** Press to reduce the speaker master volume to your desired level.
VOL+: Press to increase the speaker master volume to your desired level.
5. **Numeric Keys:** In USB /SD mode, press track number and your desired track will start playing. 1-9 just press the number, 10 is 1+0,11 is 1+1,21 is 2+1

OPERATIONS

TURNING THE UNIT ON/OFF

Press the power ON/OFF button on the back of the speaker to switch on/off the speaker.

If the power button is off, power button on the remote control will not be functional.

TRANSLUCENT CABINET LED PARTY LIGHT

To turn on the Light short press RED switch on the rear panel. There are 5 lighting modes for your selection.

Mode 1: Multi-color automatically when power on

Mode 2: Single color circle

Mode 3: Multi color circle

Mode 4: Multi color converge

Mode 5: Multi color circle & converge

Mode 6: Multi color circle & converge & flash

Mode 7: LED lighting off

TWS MODE

You can pair two GTL Series speakers to share the music. Turn on both speakers and long press “TWS” button rear panel. Speakers will pair up automatically.

Turn on your Bluetooth on your smartphone and search for “Gemini GTL Series” to pair with. Once pairing is completed, it will start playing the songs from your Bluetooth device.

Notes:

1. TWS only works in Bluetooth mode.
2. Hold and press the TWS button to disconnect TWS connection in all modes.
3. Second GTL Series speaker sold separately

SPECIFICATIONS

GTL-15PK

Active/Passive	Active
Amplifier Type	Class AB
LF Driver Size	15" Woofers with 2" Voice Coil
HF Driver Size	1" High-Frequency Driver
Total Power	1800 Watts Peak
Inputs	1 x Stereo RCA input 1 x Stereo 1/8" Aux input 1 x XLR mic input 1 x XLR Line input
Outputs	1 x XLR Line output
Media Player	Bluetooth 5.0 with TWS
Bluetooth	Bluetooth® Streaming
Lighting	5 modes / 7 colors LED Party Lighting
Frequency Response	50Hz - 20kHz
Max Peak SPL @ 1 Meter	102 dB
Signal Processing	Treble & Bass Master EQ
Enclosure Material	Polypropylene Plastic
Handles	Top & Side Handles
Mounting Options	Speaker Stand Mount (Stand Included)
Voltage	AC 115V
Power Consumption	180 Watts

GTL-215

Active/Passive	Active
Amplifier Type	Class AB
LF Driver Size	2X15" Woofer with 2" Voice Coil
HF Driver Size	1.36" High-Frequency Driver
Total Power	1800 Watts Peak
Inputs	1 x Stereo RCA input 1 x Stereo 1/8" Aux input 1 x XLR mic input 1 x XLR Line input
Outputs	1 x XLR Line output
Media Player	Bluetooth 5.0 with TWS
Bluetooth	Bluetooth® Streaming
Lighting	5 modes / 7 colors LED Party Lighting
Frequency Response	50Hz - 20kHz
Max Peak SPL @ 1 Meter	102 dB
Signal Processing	EQ
Enclosure Material	PP Plastic
Handles	Top & Side Handles
Mounting Options	Speaker Stand Mount (Stand not included)
Voltage	AC 115V
Power Consumption	200 Watts

Responsible Party Name:

Innovative Concepts & Designs LLC

Company address:

458 Florida Grove Road
Perth Amboy, NJ, 08861 USA

FCC Compliance Statement

This device complies with Part 15 of the FCC Rules. The operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received, including interference that may cause undesired operation.

Note: This equipment has been tested and found to comply with the limits for a class B digital device, pursuant to Part 15 of the FCC Rules. These equipment generates uses and can radiate radio frequency energy and if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause interference to radio or television reception, which can be determined by turning the equipment off and then on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment to a different outlet so that the equipment and receiver are on different branch circuits.
- Consult the dealer or an experienced radio/TV technician for help.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. For Mountable Outdoor Bluetooth Speakers this equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

FCC IDs:

2AE6G-GTL15PK
2AE6G-GTL215

LEGALITY & SAFETY

The device is not intended for use by people (including children) with reduced physical, sensory or mental capacity. People who have not read the manual, unless they have received an explanation by someone responsible for their safety, should not use this unit. Children should be monitored to ensure that they do not play with the device. The device should always be readily accessible. The device should not be exposed to water. No objects filled with liquids, such as vases, shall be placed on the device. Always leave a minimum distance of 10 cm around the unit to ensure sufficient ventilation. Open flame sources, such as candles, should not be placed on top of the device. The device is intended for use only in a temperate climate. At full volume, prolonged listening may damage your hearing and cause temporary or permanent deafness, hearing drone, tinnitus, or hyperacusis. Listening at high volume is not recommended. One hour per day is not recommended either. Danger of explosion if battery is incorrectly replaced or not replaced by the same type or equivalent. The battery should not be exposed to excessive heat such as sunshine or fire. Different types of batteries, or new and used batteries, should not be mixed. The battery must be installed according to its polarity. If the battery is worn, it must be removed from the product. The battery must be disposed of safely. Always use collection bins to protect the environment. The battery can only be replaced by the maker of this product, the sales department, or a qualified person. Switch the device off where the use of the device is not allowed or where there is a risk of causing interference or danger - for examples: on an aircraft, or near medical equipment, fuel, chemicals or blasting sites. Check the current laws and regulations regarding the use of this device in the areas where you drive. Do not handle the device when driving. Concentrate fully on driving. All wireless devices are susceptible to interference which may affect their performance. All our devices conform to international/national standards and regulations, and we aim to limit user exposure to electromagnetic fields. These standards and regulations were adopted after the completion of extensive scientific research. This research established no link between the use of the mobile headset and any adverse effects on health if the device is used in accordance with standard practices. Only qualified people are authorized to install or repair this product. Only use batteries, chargers and other accessories which are compatible with this equipment. Do not connect incompatible products. This equipment is not waterproof. Keep it dry. Keep your device in a safe place, out of the reach of young children. The device contains small parts which may present a choking hazard to kids

WARRANTY

A. Innovative Concepts & Designs LLC guarantees its products to be free from defects in materials and workmanship for one (1) year from the original purchase date. Exceptions: Laser assemblies on CD Players, batteries, cartridges, and crossfaders are covered for 90 days.

B. This limited warranty does not cover damage or failure caused by abuse, misuse, abnormal use, faulty installation, improper maintenance or any repairs other than those provided by an authorized Innovative Concepts & Designs LLC Service Center.

C. There are no obligations of liability on the part of Innovative Concepts & Designs LLC for consequential damages arising out of or in connection with the use or performance of the product or other indirect damages with respect to loss of property, revenues, of profit, or costs of removal, installation, or reinstallation. All implied warranties for Innovative Concepts & Designs LLC, including implied warranties for fitness, are limited in duration to one (1) year from the original date of purchase, unless otherwise mandated by local statutes.

The logo for Gemini Sound, featuring the word "gemini" in a bold, lowercase, sans-serif font. A registered trademark symbol (®) is located at the top right of the letter "i".

support.geminisound.com

INTRODUCCIÓN

Los altavoces de la serie GTL combinan un sonido potente con impresionantes efectos visuales, lo que los hace perfectos para fiestas, eventos y configuraciones de audio profesionales. Con conectividad Bluetooth®, enlace True Wireless Stereo (TWS) y múltiples opciones de entrada, estos altavoces ofrecen versatilidad y facilidad de uso para diversos escenarios. Tanto el GTL-15PK como el GTL-215 cuentan con llamativos gabinetes translúcidos que permiten que la iluminación LED integrada para fiestas brille, iluminando todo el altavoz. Esta iluminación dinámica añade energía a cualquier evento y se sincroniza con tu música, creando una experiencia audiovisual inmersiva. El GTL-15PK incluye un woofer de 15 pulgadas y viene con un soporte para altavoces, mientras que el GTL-215 cuenta con woofers duales de 15 pulgadas para mejorar los graves. Ambos modelos incluyen entradas RCA, XLR y de 1/4 de pulgada, lo que los hace ideales para hablar en público, actuaciones en vivo o reproducción de música. Empareja tus dispositivos Bluetooth® de forma inalámbrica y disfruta de un sonido claro y de alta potencia y de imágenes impresionantes dondequiera que vayas.

SONIDO INMERSIVO

Disfruta de un audio rico y de rango completo gracias a los potentes woofers (15" para GTL-15PK, doble de 15" para GTL-215) y a los amplificadores de clase A/B de alta eficiencia, que ofrecen graves profundos y agudos nítidos.

ILUMINACIÓN LED PARA FIESTAS

La fiesta anima la fiesta con las luces LED integradas que brillan a través del gabinete translúcido. Elija entre 5 modos de iluminación y 7 opciones de colores vibrantes para combinar con cualquier estado de ánimo.

EMPAREJAMIENTO INALÁMBRICO PERFECTO


El diente 5.0 con TWS (True Wireless Stereo) le permite emparejar de forma inalámbrica dos altavoces de la serie GTL para una experiencia estéreo inmersiva, perfecta para eventos más grandes.

REPRODUCTORES MULTIMEDIA VERSÁTIL

Sporta Bluetooth, tarjeta SD, USB y reproducción de radio FM, todo accesible a través de una pantalla digital fácil de usar. ¡Disfruta de tu música a tu manera!

DISEÑO ROBUSTO Y PORTÁTIL

En armario translúcido listo para la fiesta con ruedas incorporadas para facilitar el transporte. El GTL-15PK incluye un soporte de altavoz para una proyección de sonido óptima en cualquier lugar.

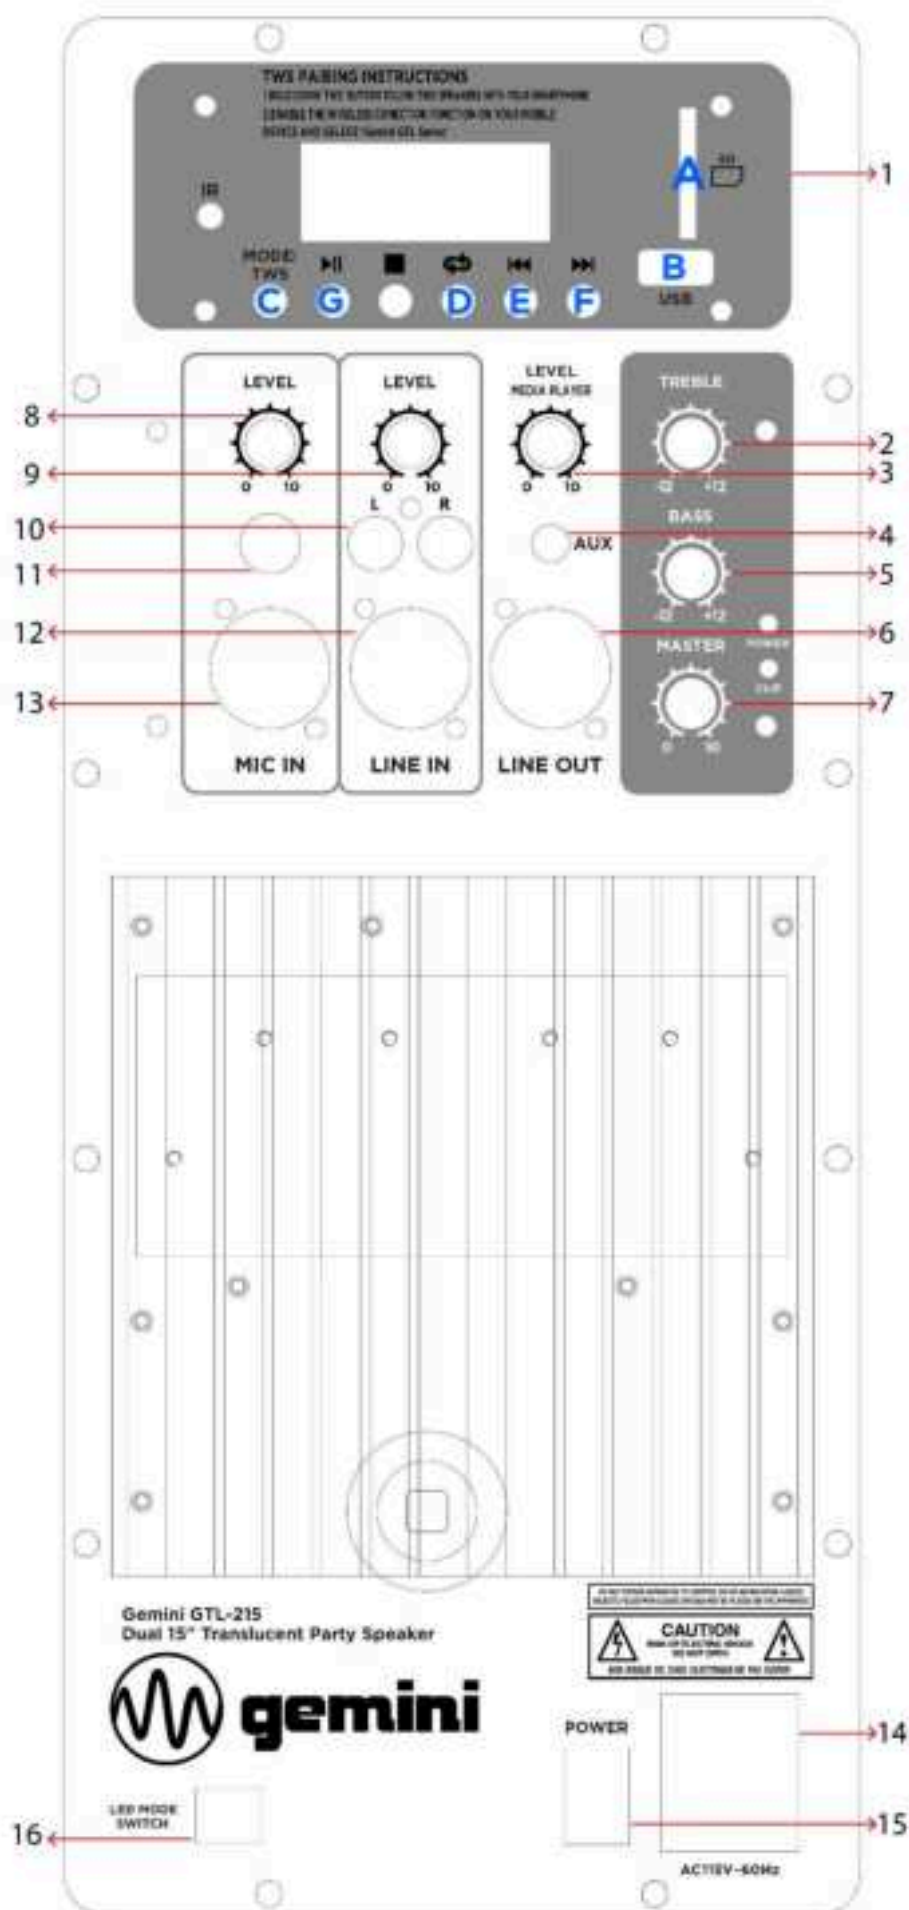

DESCRIPCIÓN GENERAL

17. Panel de control

- h. TARJETA SD: Inserte la tarjeta de memoria para reproducir la música almacenada.
- i. USB: Inserte un dispositivo de almacenamiento USB para reproducir la música almacenada.
- j. MODO: Presione para seleccionar LINE (entrada auxiliar) / BLUETOOTH / FM.
- k. Repetir / Ecualizador: Pulsación corta para repetir la pista. Mantenga presionado para seleccionar los modos de ecualización. (Modos de ecualización: Normal / Clásico / Jazz / Pop / Rock).
- l. /VOL-: Pulsación corta para la canción anterior, pulsación larga para bajar el volumen.
- m. /VOL+: Pulsación corta para saltar a la siguiente canción, pulsación larga para subir el volumen.
- n. /TWS: En el modo USB / SD / BT, presione brevemente para reproducir y pausar la música. En el modo FM, presione para buscar automáticamente y almacenar estaciones de radio. Mantenga presionado para el emparejamiento de TWS.

18. **TREBLE**: Gire la perilla para ajustar la configuración de agudos a los niveles deseados

19. **VOLUMEN DEL REPRODUCTOR MULTIMEDIA**: En el modo USB/SD/FM/BT, gire la perilla para ajustar el volumen al nivel deseado.

20. **ENTRADA AUX: Conecte** un dispositivo de audio externo a través de un cable auxiliar de 1/8"

21. **BASS**: Gire la perilla para ajustar BASS al nivel deseado.

22. **SALIDA DE LÍNEA BALANCEADA**: Envía la mezcla de audio maestra a un segundo altavoz o dispositivo de grabación

23. **MASTER VOLUME**: Controla el volumen del altavoz.

24. **VOLUMEN DE ENTRADA DE MICRÓFONO**: Gire la perilla para ajustar el volumen de la MIC al nivel deseado.

25. **VOLUMEN DE ENTRADA DE LÍNEA**: Gire la perilla para ajustar el volumen de LÍNEA al nivel deseado.

26. **ENTRADA RCA**: Conéctese a un dispositivo externo a través de cables RCA estéreo

27. **ENTRADA DE MICRÓFONO DE 1/4"**: Inserte su micrófono con un cable de 1/4"

28. **ENTRADA DE LÍNEA XLR**: Conecte el dispositivo externo con el cable XLR

29. **ENTRADA DE MICRÓFONO XLR**: Inserte su micrófono con el cable XLR

30. **ALIMENTACIÓN DE CA**: Conecte el cable de alimentación IEC al altavoz y conéctelo a la toma de corriente principal.

31. **POWER**: Presione para encender / apagar el altavoz.


32. **INTERRUPTOR LED**: Presione para encender / apagar las luces.

CONTROL REMOTO

1. **ENCENDIDO:** Cuando el interruptor de encendido de la unidad esté encendido, presione el botón de encendido en el control remoto y la unidad entrará en modo STANDBY. Presione el botón de encendido nuevamente y se reanudará al modo normal.

STOP: En el modo de tarjeta SD y USB, presione para detener la reproducción de medios.

MUTE: Presione para silenciar la música en cualquier modo, presione nuevamente para reanudar el sonido.

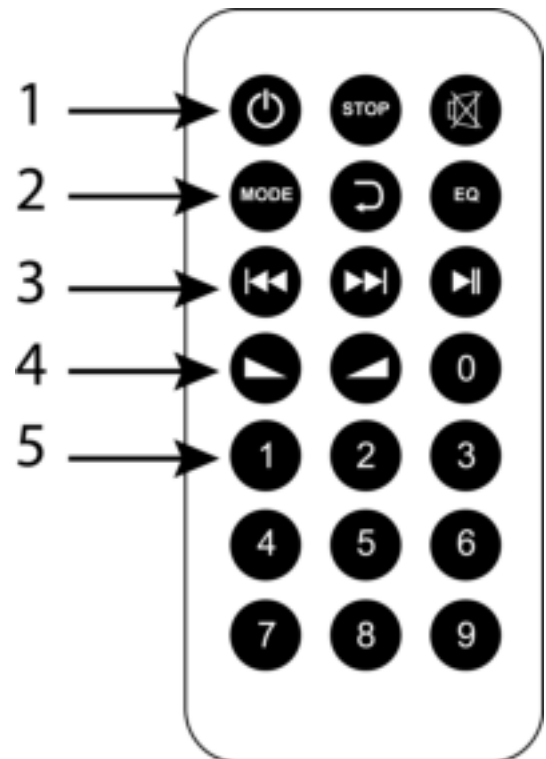

2. **MODO:** Presione repetidamente para seleccionar los siguientes modos: LINE IN (AUX IN)/USB/TF CARD / FM Radio/Wireless BT.

REPEAT: Presione para repetir una canción o repetir todas las canciones.

En el modo BT inalámbrico, este botón no tiene ninguna función.

EQ: Presione para cambiar entre los diferentes modos de ecualización. Esto solo funciona en el modo de tarjeta USB/SD. (Modos de ecualización: Normal / Clásico / Jazz / POP / Rock).

3. **⏮** En el modo USB/tarjeta SD y AUX, presione una vez para volver a la canción anterior; Mantenga presionado durante 3 segundos para rebobinar la canción actual.

En el modo Bluetooth "BT", presione una vez para volver a la canción anterior.

En el modo FM, presione una vez para volver al canal anterior.

⏭ En la tarjeta USB / SD y en el modo AUX, presione una vez para ir a la siguiente canción, mantenga presionado durante 3 segundos para avanzar rápidamente la canción actual.

En el modo BT, presione una vez para ir a la siguiente canción.

En el modo FM, presione una vez para ir al siguiente canal.

⏸ En todos los modos, presione para pausar la música. Pulsa de nuevo para reanudar la reproducción.

4. **VOL -:** Presione para reducir el volumen principal del altavoz al nivel deseado.
VOL+: Presione para aumentar el volumen principal del altavoz al nivel deseado.

5. **Teclas numéricas:** En el modo USB / SD, presione el número de pista y la pista deseada comenzará a reproducirse. 1-9 simplemente presione el número, 10 es 1 + 0, 11 es 1 + 1, 12 es 2 + 1

OPERACIONES

ENCENDIDO/APAGADO DE LA UNIDAD

Presione el botón de encendido / apagado en la parte posterior del altavoz para encender / apagar el altavoz.

Si el botón de encendido está apagado, el botón de encendido del control remoto no funcionará.

LUZ DE FIESTA LED PARA GABINETE TRANSLÚCIDA

Para encender la luz, presione brevemente el interruptor ROJO en el panel trasero. Hay 5 modos de iluminación para su selección.

Modo 1: Multicolor automáticamente cuando se enciende

Modo 2: Círculo de un solo color

Modo 3: Círculo multicolor

Modo 4: Convergencia multicolor

Modo 5: Círculo multicolor y convergencia

Modo 6: Círculo multicolor y converger y parpadear

Modo 7: Iluminación LED apagada

MODO TWS

Puede emparejar dos altavoces de la serie GTL para compartir la música. Encienda ambos altavoces y mantenga presionado el botón "TWS" en el panel trasero. Los altavoces se emparejarán automáticamente.

Encienda su Bluetooth en su teléfono inteligente y busque "Gemini GTL Series" para emparejar. Una vez que se complete el emparejamiento, comenzará a reproducir las canciones de su dispositivo Bluetooth.

Notas:

1. TWS solo funciona en modo Bluetooth.
2. Mantenga presionado y presione el botón TWS para desconectar la conexión TWS en todos los modos.
3. El segundo altavoz de la serie GTL se vende por separado

CARACTERÍSTICAS TÉCNICAS

GTL-15PK

Activo/Pasivo	Activo
Tipo de amplificador	Clase AB
Tamaño del controlador LF	Woofers de 15" con bobina móvil de 2"
Tamaño del controlador HF	Controlador de alta frecuencia de 1"
Potencia total	1800 vatios pico
Entradas	1 x Entrada RCA estéreo 1 x Contribución Auxux de 1/8" 1 entrada de micrófono XLR 1 x Entrada de línea XLR
Salidas	1 x Salida de línea XLR
Reproductor multimedia	Bluetooth 5.0 con TWS
Bluetooth	Transmisión por Bluetooth®
Iluminación	7 modos / 7 colores LED Iluminación de fiesta
Respuesta de frecuencia	50 Hz - 20 kHz
SPL máximo máximo @ 1 metro	102 dB
Procesamiento de señales	Ecualizador maestro de agudos y graves
Material de la carcasa	Plástico de polipropileno
Manijas	Asas superiores y laterales
Opciones de montaje	Soporte de soporte de altavoz (soporte incluido)
Voltaje	CA 115 V
Consumo de energía	180 vatios

GTL-215

Activo/Pasivo	Activo
Tipo de amplificador	Clase AB
Tamaño del controlador LF	Woofers de 2x15" con bobina móvil de 2"
Tamaño del controlador HF	Controlador de alta frecuencia de 1,36"
Potencia total	1800 vatios pico
Entradas	1 x Entrada RCA estéreo 1 x Contribución Auxux de 1/8" 1 entrada de micrófono XLR 1 x Entrada de línea XLR
Salidas	1 x Salida de línea XLR
Reproductor multimedia	Bluetooth 5.0 con TWS
Bluetooth	Transmisión por Bluetooth®
Iluminación	7 modos / 7 colores LED Iluminación de fiesta
Respuesta de frecuencia	50 Hz - 20 kHz
SPL máximo máximo @ 1 metro	102 dB
Procesamiento de señales	EQ
Material de la carcasa	Plástico PP
Manijas	Asas superiores y laterales
Opciones de montaje	Soporte de soporte de altavoz (soporte no incluido)
Voltaje	CA 115 V
Consumo de energía	200 vatios

gemini[®]
support.geminisound.com