

UNPACKING INSTRUCTIONS

- Carefully open the carton, remove contents and lay out on cardboard or other protective surface to avoid damage.
- Check package contents against the Supplied Parts List in the next page to assure that all components were received undamaged. Do not use damaged or defective parts.
- Carefully read all instructions before attempting installation.

IMPORTANT SAFETY INFORMATION


Install and operate this device with care. Please read this instruction before beginning the installation, and carefully follow all instructions contained herein. Use proper safety equipment during installation.

Please call a qualified installation contractor for help if you:


- If you don't understand these directions or have any doubts about the safety of the installation.
- If you are uncertain about the nature of your wall, consult a qualified installation contractor.

Do not use this product for any purpose or in any configuration not explicitly specified in this instruction. We hereby disclaim any and all liability for injury or damage arising from incorrect assembly, incorrect mounting, or incorrect use of this product.


Supplied Parts List

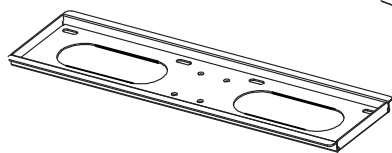


(1)TV Plate-a

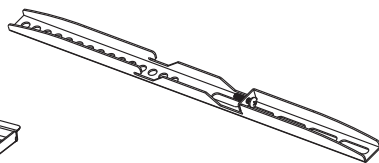


(2)Monitor Bracket-b

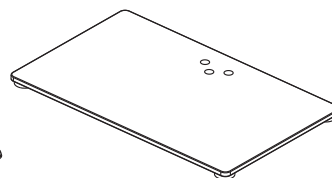


(1)Tempered Glass-c

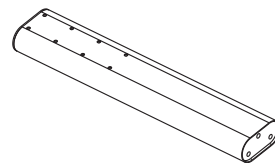

(1)Support Column-d




(1)Plastic Socket-e




(1)Metal Pad-f




(4)M6x10 Bolt-g




(4)Metal Washer-h



(3)M8x22 Bolt-i




(2)Wire Clip-j




(4)Rubber Foot-k




(4)M4x12 Bolt-l




(4)M4x30 Bolt-m




(4)M6x20 Bolt-n




(4)M6x35 Bolt-o



(4)M8x20 Bolt-p

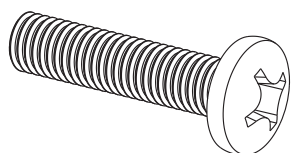


(4)M8x35 Bolt-q

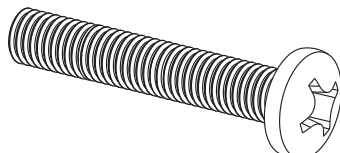


(4)M8x50 Bolt-r




(4)M4 Washer-s




(4)M6 Washer-t




(4)M8 Washer-u




(4)M4 Spacer-v



(8)M6/M8 Spacer-w




(1)Allen Key-x



(1)Security Wire Kit-y


Step 1

Connecting the Support Column to Tempered Glass

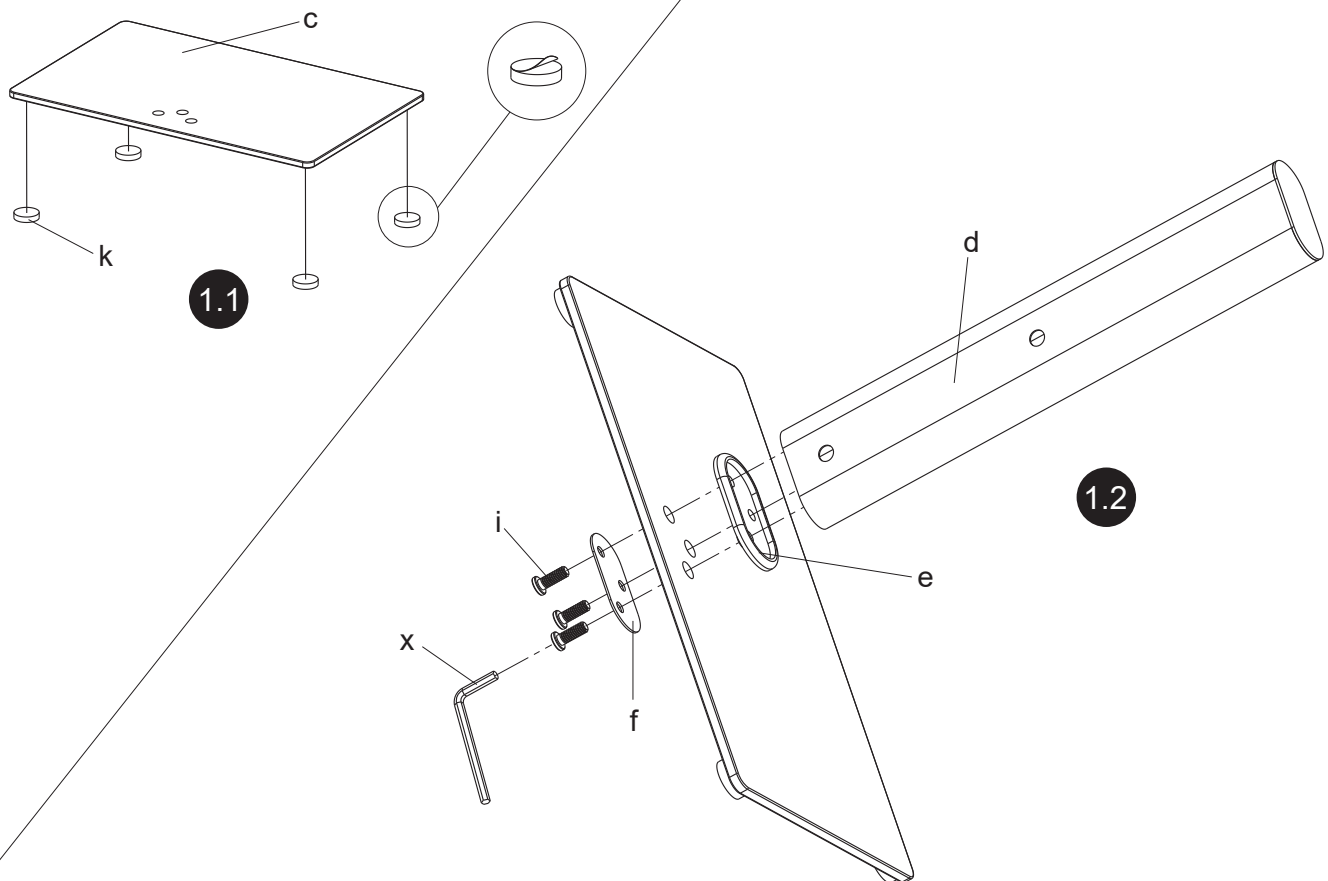

Step 2

Connecting the TV Plate to Support Column

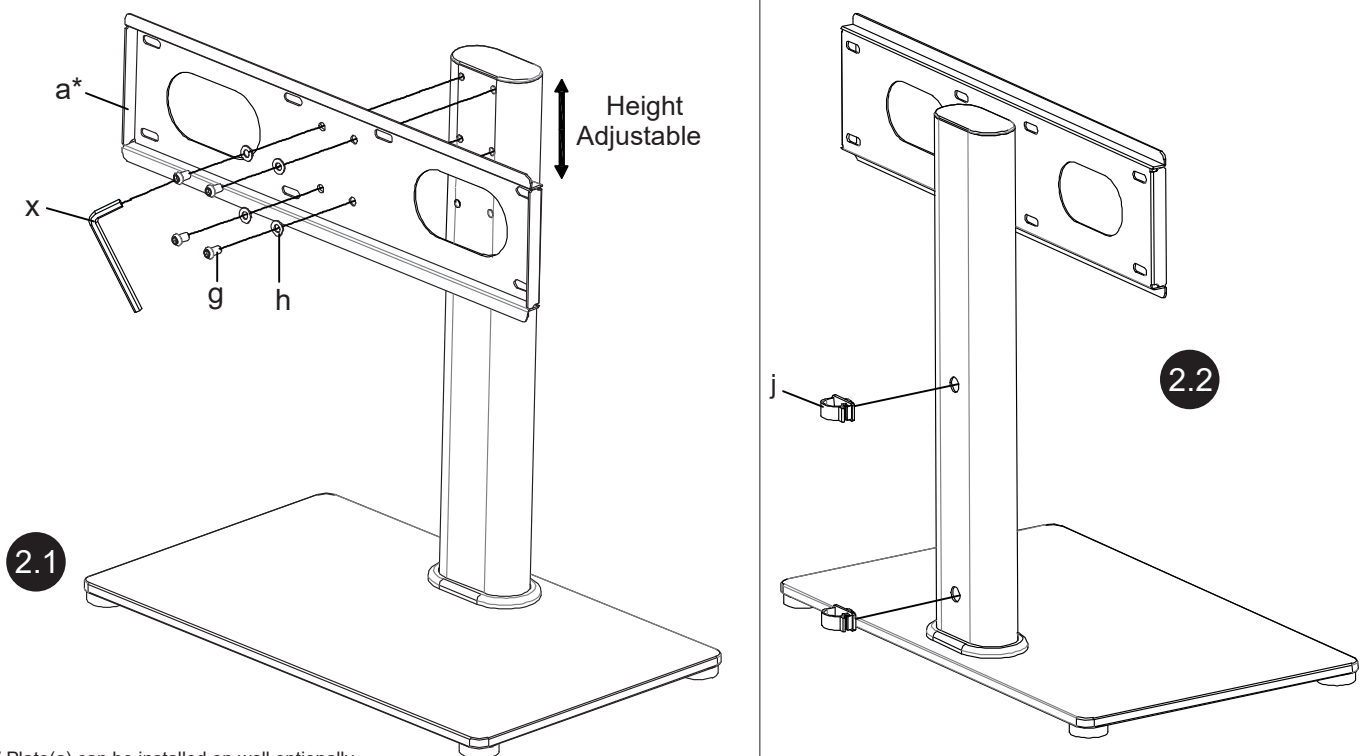


*TV Plate(a) can be installed on wall optionally, wall mounting hardware have not included.

Step 3


Mounting the Monitor Brackets to a TV

First of all, make sure the diameter of the Bolt(l to r) your TV requires. Once you have determined the correct diameter, please see the diagram as below. You will thread the Bolt into the TV using the correct Washer(s,t,u), and using the spacer(v,w) if necessary. Please make sure the Monitor Brackets are vertically centered and level with each other.

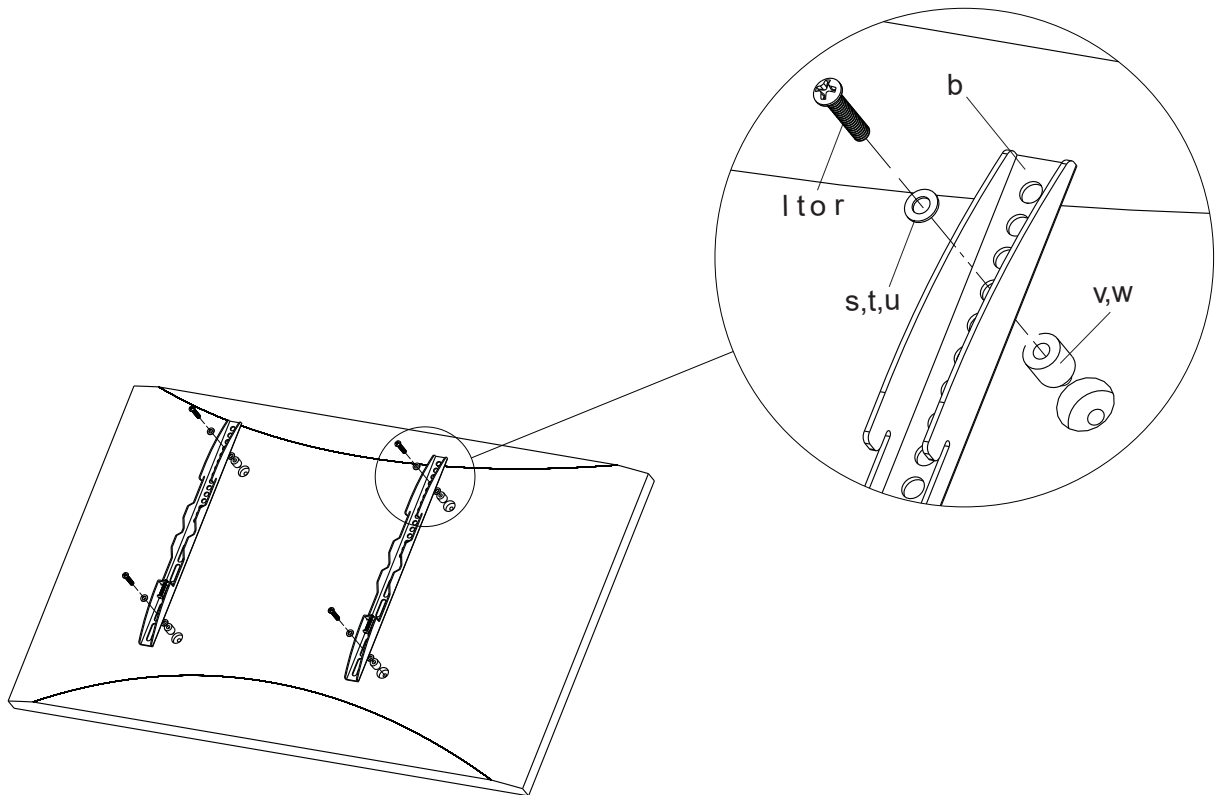

Step 4

Attaching TV To TV Plate and Managing the Wires

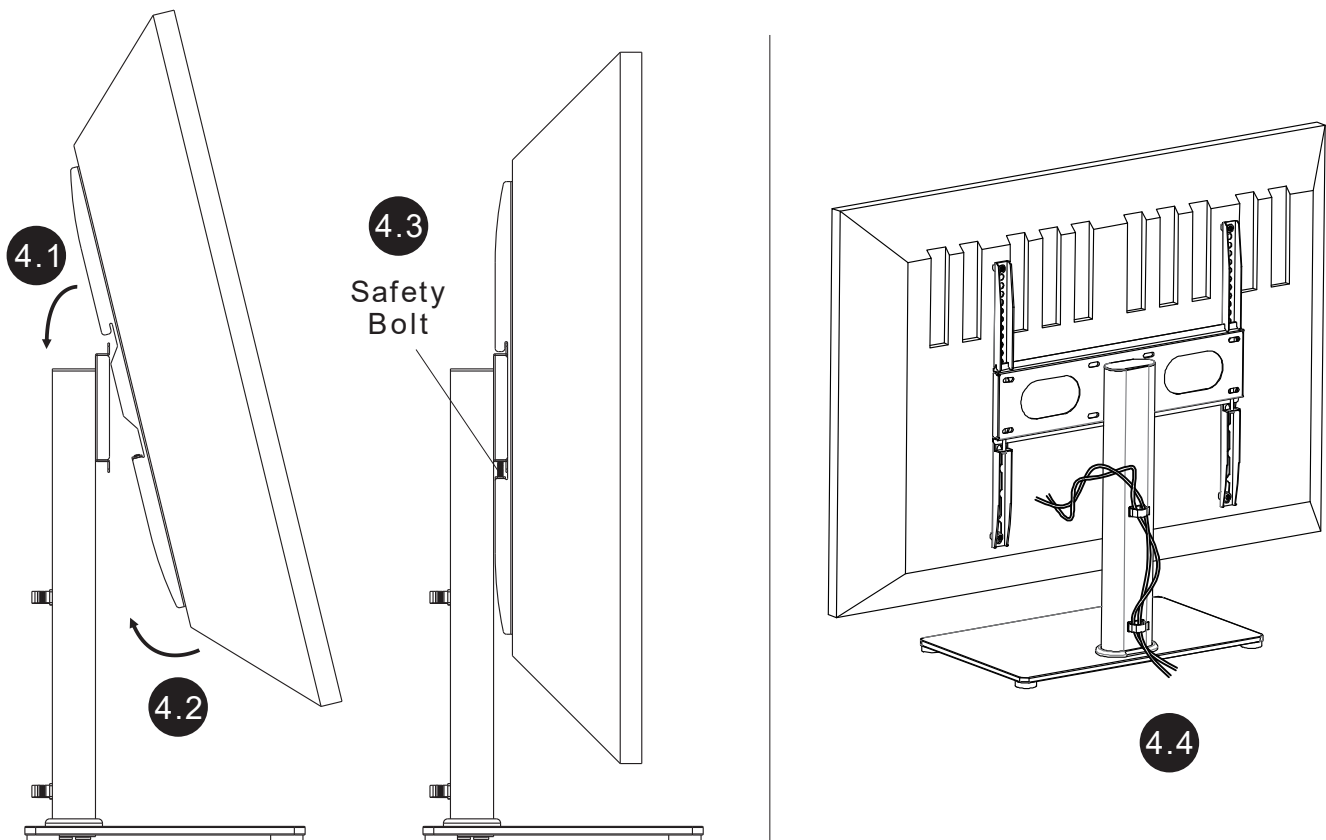

Step 5

Attaching the Security Steel Wire to the TV

If your TV is located nearby the wall as the Diagram 5a, then a steel wire can be attached for added security. Attaching the two ends of steel wire to the top two holes on the back of TV, shown in Diagram 5b.

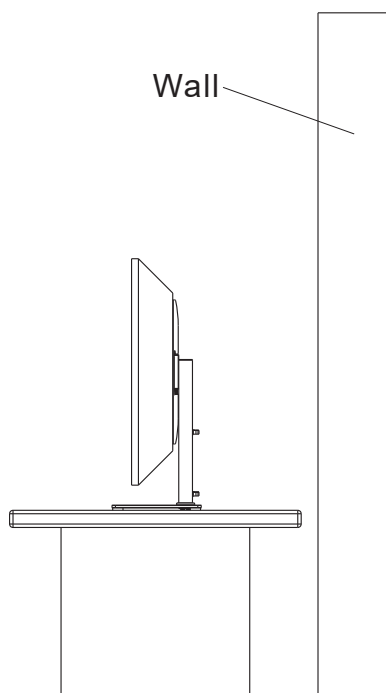


Diagram 5a

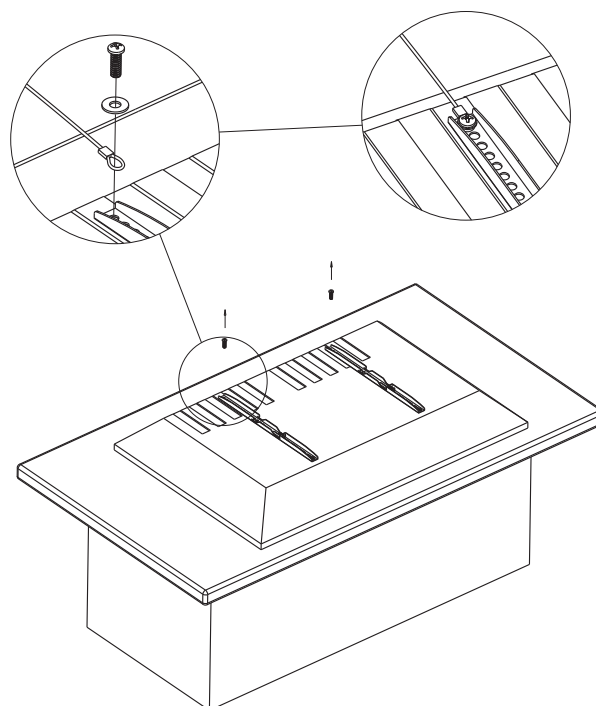


Diagram 5b

Attaching the another end of steel wire to the wall according to your wall type, shown in Diagram 5c, 5d and 5e.

Wood Stud Wall





Diagram 5c

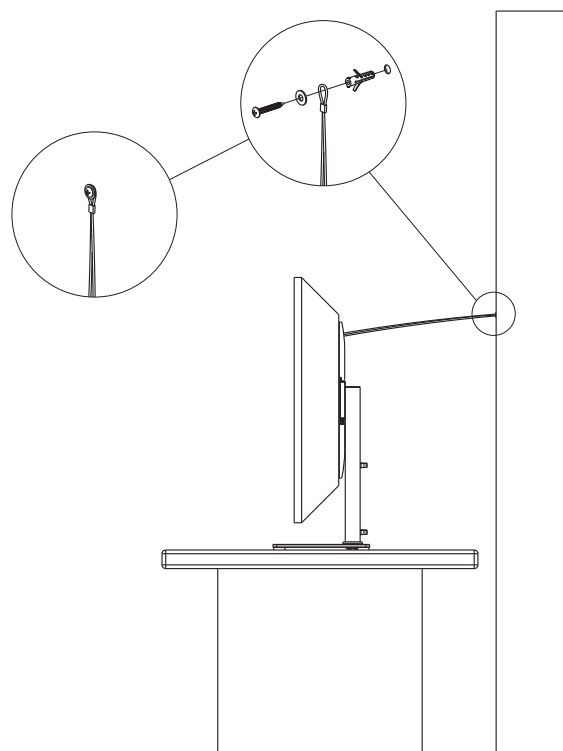


Diagram 5e

Concrete & Brick Wall





Diagram 5d