




ACCUTRON 9058 GMT INSTRUCTIONS

1. DISPLAY AND CROWN POSITIONS

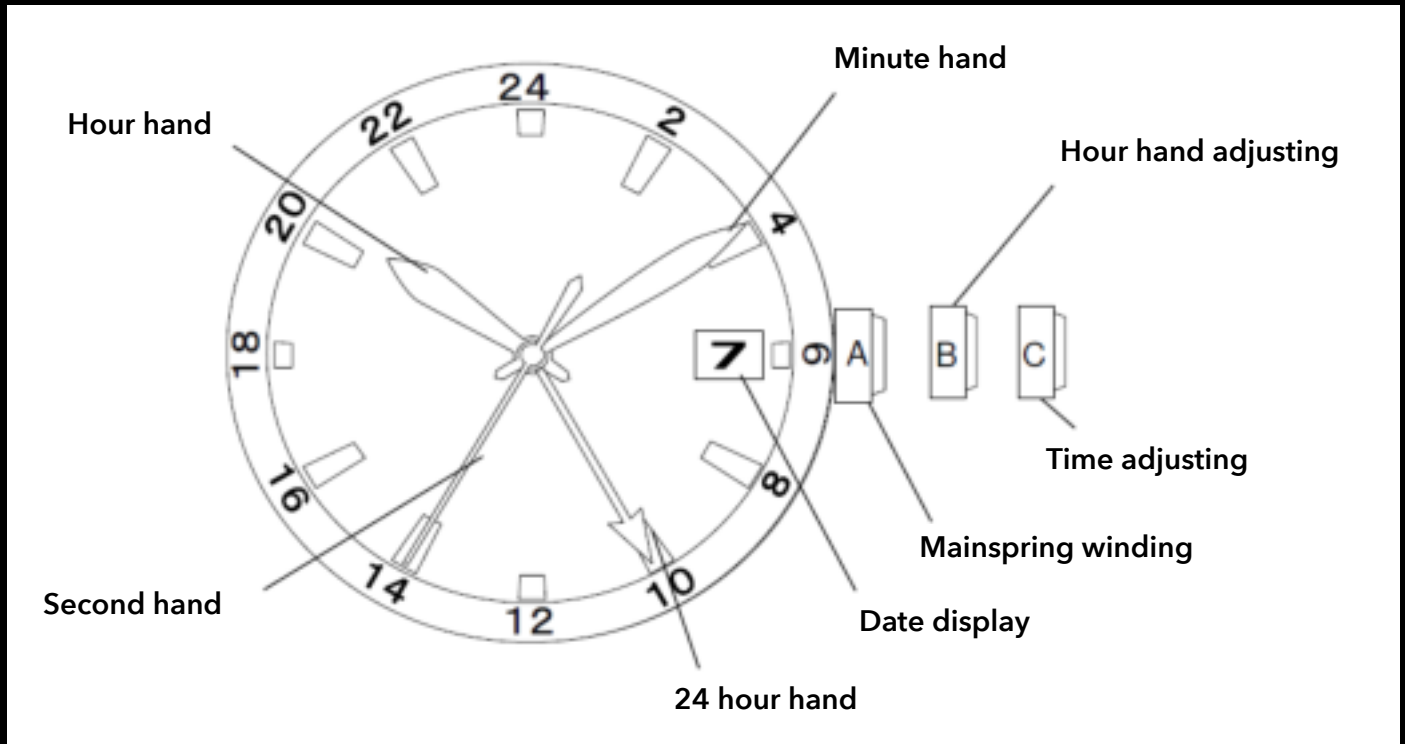

2. WINDING THE MAINSPRING

This self-winding mechanical movement can also be manually wound. Turn crown in position A 15 to 20 times clockwise until the second hand starts to move naturally.

3. SETTING THE TIME

- Set the 24-hour GMT hand (with triangle tip) to 'home' time using the 24-hour track printed in the outer zone of dial. Pull the crown out to Position C and rotate the crown in either direction. Setting the 24-hour hand will also move the hour hand. Pulling the crown out to Position C will stop the second hand to provide precise time.
- Set the hour hand for 'local' time. Pull crown out to Position B and rotate the crown in either direction. If your local and home time are the same, the hands will tell the same time. When travelling to a new location, pull the crown out to Position B and rotate the hour hand to local time. The 24-hour GMT hand will remain at the 'home' time.

4. SETTING THE DATE

- The date is linked to the local time. Pull crown out to Position B and rotate the hour hand in either direction. Two rotations of the hour hand around the dial will either advance or reverse the date. Be careful to set the date in the AM cycle or the PM cycle.