


Do You Need to Update Your Existing Caséta Device(s)?

- A Diva smart dimmer that came in the same package
- Any other Caséta device

Caséta Firmware Update Process

- | | | | |
|--|--|--|---|
| 1. Open the Lutron App and select Settings (gear icon) | 2. Select Firmware Update (If an update is available, a red dot will be present) | 3. Select the devices to be updated and click on the Update button | 4. A prompt will appear when upgrade is complete – you are now able to access your system |
|--|--|--|---|

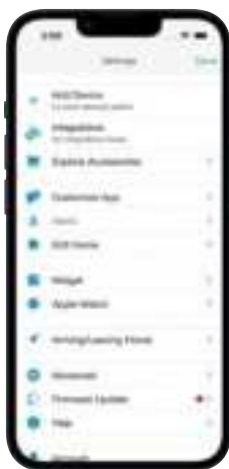

What to Know During the Update

1. The app can be closed
2. System performance may be impacted (including existing schedules, scenes, and Pico remotes)
3. No additional devices can be added to your system
4. Updates typically take 10-15 minutes per device

If you have additional questions about the firmware process, visit Lutron.com/firmware.

