



Go to www.vtechphones.com to register your product for enhanced warranty support and the latest VTech product news.

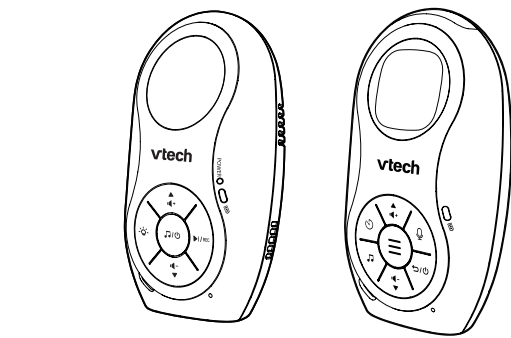

vttech® User's manual

For more support information

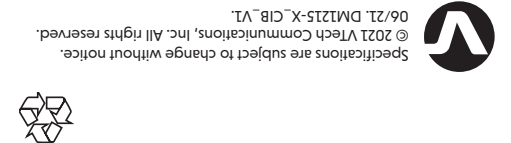

06/21 DM1215-X-CB_01_V1
© 2021 VTech Communications, Inc. All rights reserved.
Specifications are subject to change without notice.

TECHNICAL SPECIFICATIONS	
Frequency control	Crystal controlled PLL synthesizer
Transmit frequency	Parent unit: 1921.536 - 1928.448 MHz Baby unit: 1921.536 - 1928.448 MHz
Channels	5
LCD	35 (x) x 21.2 (y) mm B&W LCD
Normal effective range	Maximum power allowed by FCC and IC. Actual operating range may vary according to environmental conditions at the time of use.
Power requirement	Baby unit / Parent unit: 1.2 V 400 mAh Ni-MH battery Baby unit / Parent unit power adapters: Output: 6V DC 400mA

DM1215

DM1215-2

Audio Baby Monitor

IMPORTANT SAFETY INSTRUCTIONS

The applied nameplate is located in the battery compartment of the baby and parent units.

When using your equipment, basic safety precautions should always be followed to reduce the risk of fire, electric shock and injury, including the following:

1. Follow all warnings and instructions marked on the product.
2. Adult setup is required.
3. **CAUTION:** Do not install the baby unit at a height above 2 meters.
4. This product is not a substitute for adult supervision of the infant. Supervising the infant is the parent's or caregiver's responsibility. This product could cease operating, and therefore you should not assume it will continue working properly for any given period of time. Further, this is not a medical device and should not be used as such. This product is intended to assist you in supervising your baby.
5. Do not use this product near water. For example, do not use it next to a bath tub, wash bowl, kitchen sink, laundry tub or swimming pool, or in a wet basement or shower.
6. **CAUTION:** Use only the batteries provided. There may be a risk of explosion if a wrong type of battery is used for the parent unit. The batteries cannot be subjected to high or low extreme temperature and low air pressure at high altitude during use, storage or transportation. Disposal of batteries into fire or a hot oven, or mechanically crushing or cutting or the batteries can result in an explosion. Leaving the batteries in an extremely high temperature surrounding environment can result in an explosion or the leakage of flammable liquid of gas. Batteries subjected to extremely low air pressure may result in an explosion or the leakage of flammable liquid or gas. Dispose of used battery according to the information in The RBRC seal.
7. Use only the adapters included with this product. Incorrect adapter polarity or voltage can seriously damage the product.
8. Use only adaptors and batteries listed below.

Power adapter information:

VTech Telecommunications Ltd.

Model: VT05EUS06040

Rechargeable batteries information:

ShenZhen Hipower Technology Co., Ltd. (HFR-AAA400)

YIYANG CORUN BATTERY CO., LTD (KH-AAA400)

Ni-MH AAA400mAh 1.2 V

9. The power adapters are intended to be correctly oriented in a vertical or floor mount position. The prongs are not designed to hold the plug in place if it is plugged into a ceiling, under-the-table or cabinet outlet.
10. For pluggable equipment, the socket-outlet shall be installed near the equipment and shall be easily accessible.
11. Unplug this product from the wall outlet before cleaning. Do not use liquid or aerosol cleaners. Use a damp cloth for cleaning.
12. Unplug the power cords before replacing batteries.
13. Do not cut off the power adapters to replace them with other plugs, as this causes a hazardous situation.
14. Do not allow anything to rest on the power cords. Do not install this product where the cords may be walked on or crimped.
15. This product should be operated only from the type of power source indicated on the marking label. If you are not sure of the type of power supply in your home, consult your dealer or local power company.
16. Do not overload wall outlets or use an extension cord.
17. Do not place this product on an unstable table, shelf, stand or other unstable surfaces.
18. This product should not be placed in any area where proper ventilation is not provided. Slots and openings in the back or bottom of this product are provided for ventilation.

To protect them from overheating, these openings must not be blocked by placing the product on a soft surface such as a bed, sofa or rug. This product should never be placed near or over a radiator or heat register.

18. Never push objects of any kind into this product through the slots because they may touch dangerous voltage points or create a short circuit. Never spill liquid of any kind on the product.
19. To reduce the risk of electric shock, do not disassemble this product, but take it to an authorized service facility. Opening or removing parts of the product other than specified access doors may expose you to dangerous voltages or other risks. Incorrect reassembling can cause electric shock when the product is subsequently used.
20. You should test the sound reception every time you turn on the units or move one of the components.
21. Periodically examine all components for damage.
22. There is a very low risk of privacy loss when using certain electronic devices, such as baby monitors, cordless telephones, etc. To protect your privacy, make sure the product has never been used before purchase, reset the baby monitor periodically by powering off and then powering on the units, and power off the baby monitor if you will not use it for some time.
23. Children should be supervised to ensure that they do not play with the product.
24. The product is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of the appliance by a person responsible for their safety.

SAVE THESE INSTRUCTIONS

1. Use and store the product at a temperature between 32°F and 104°F.
2. Do not expose the product to extreme cold, heat or direct sunlight. Do not put the product close to a heating source.
3. Batteries should not be exposed to excessive heat such as bright sunshine or fire.
4. **Warning—Strangulation Hazard—Children** have STRANGLED in cords. Keep this cord out of the reach of children (more than 3 ft (0.9 m) away). Do not remove this tag.
5. Never place the baby unit inside the baby's crib or playpen. Never cover the baby unit or parent unit with anything such as a towel or a blanket.
6. Other electronic products may cause interference with your baby monitor. Try installing your baby monitor as far away from these electronic devices as possible: wireless routers, radios, cellular telephones, intercoms, room monitors, televisions, personal computers, kitchen appliances and cordless telephones.

Precautions for users of implanted cardiac pacemakers
Cardiac pacemakers (applies only to digital cordless devices): Wireless Technology Research, LLC (WTR), an independent research entity, led a multidisciplinary evaluation of the interference between portable wireless devices and implanted cardiac pacemakers. Supported by the U.S. Food and Drug Administration, WTR recommends to physicians that:


Pacemaker patients

- Should keep wireless devices at least six inches from the pacemaker.
- Should NOT place wireless devices directly over the pacemaker, such as in a breast pocket, when it is turned ON. WTR's evaluation did not identify any risk to bystanders with pacemakers from other persons using wireless devices.

Electromagnetic fields (EMF)

This VTech product complies with all standards regarding electromagnetic fields (EMF). If handled properly and according to the instructions in this user's manual, the product is safe to be used based on scientific evidence available today.

WHAT'S IN THE BOX

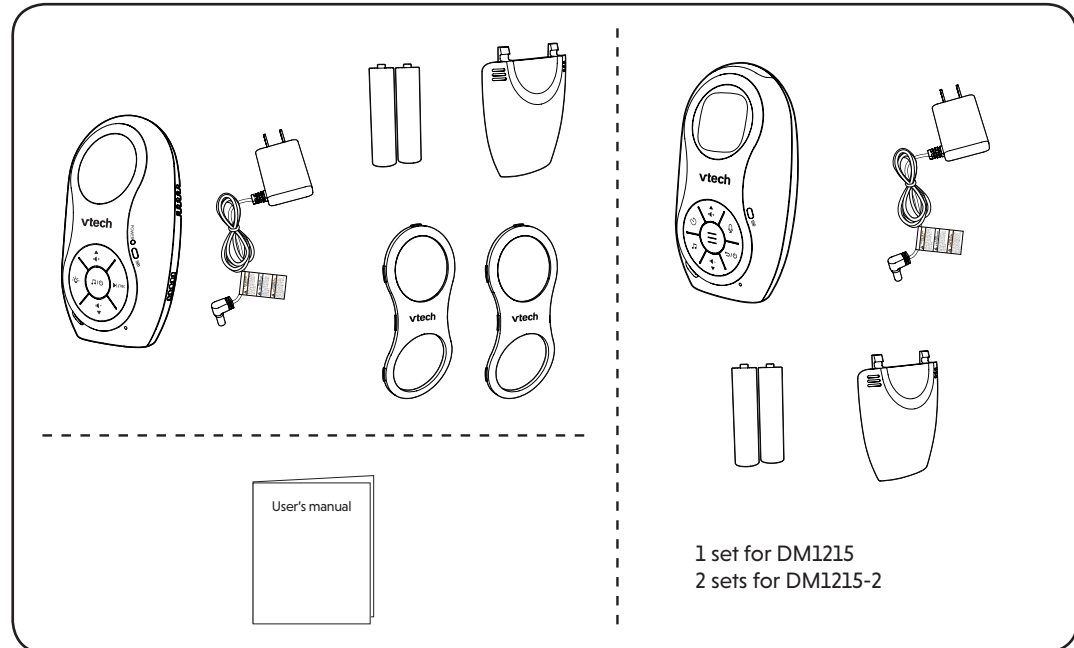


1 set for DM1215
2 sets for DM1215-2

1 CONNECT AND CHARGE THE BATTERIES

Install the parent unit batteries

NOTES


- Use only the batteries supplied with this product.
- If the parent unit will not be used for a long time, disconnect and remove the batteries to prevent possible leakage.

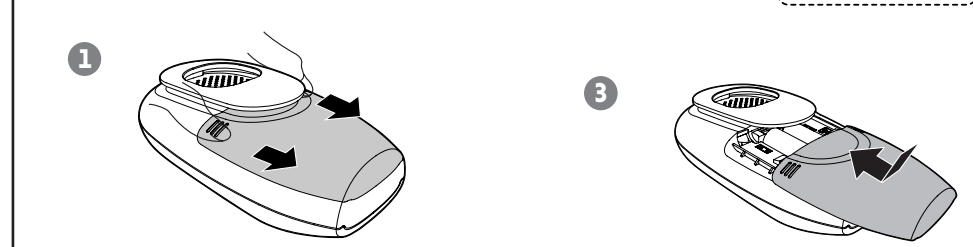

Install the baby unit batteries

NOTES


- Use only the batteries supplied with this product.
- If the baby unit will not be used for a long time, disconnect and remove the batteries to prevent possible leakage.

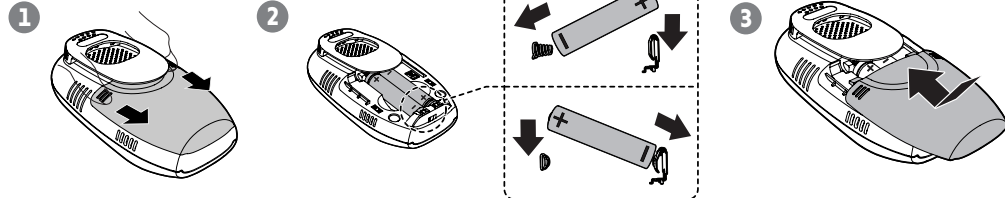

Connect the baby monitor

NOTES

- Use only the power adapters supplied with this product.
- Make sure the baby monitor is not connected to switch-controlled electric outlets.
- Connect the power adapters in a vertical or floor mount position only. The adapters' prongs are not designed to hold the weight of baby monitor, so do not connect them to any ceiling, under-the-table, or cabinet outlets. Otherwise, the adapters may not properly connect to the outlets.
- Make sure the parent unit, the baby unit and the power adapter cords are out of reach of children.

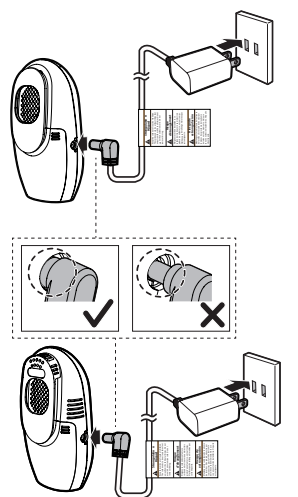

Charge the batteries before use

When you have connected and turned on the parent unit and baby unit, the batteries will be charged automatically.

NOTES


- Before using the baby monitor for the first time, charge the parent unit and baby unit batteries for 12 hours.
- The standby time varies depending on the sensitivity level you set, your actual use and the age of the batteries.

The battery icon indicates the battery status (see the following table).


BATTERY INDICATORS	BATTERY STATUS	ACTION
The parent unit beeps and the screen displays	The batteries have very little power and may only be used for a short time.	Charge without interruption. The recommended charging time from low to full battery is at least 10 hours, for both baby unit and parent unit.
The battery icon becomes solid	The batteries are fully charged.	To keep the batteries charged, connect it to AC power when not in use.

2 POWER ON OR OFF THE BABY MONITOR

1. Press and hold to power on the baby unit. The power light turns on. Press and hold to power off the baby unit. The power light turns off.

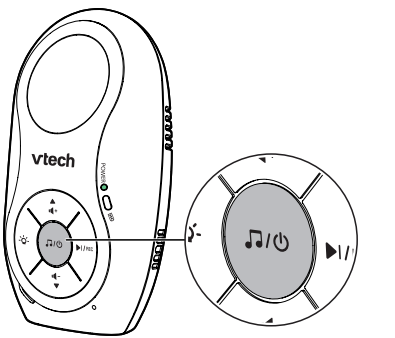

2. Press and hold to power on or off the parent unit.

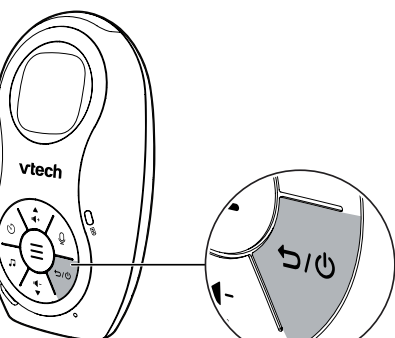


3 STATUS CHECK

After you power on both your baby unit and parent unit, the power light of baby unit turns on.

If the parent unit is out of range of the baby unit, or the baby unit is out of power, the parent unit beeps and its LCD displays **NOT LINKED**.

- Move the parent unit closer to the baby unit.
- Make sure the baby unit is powered on.

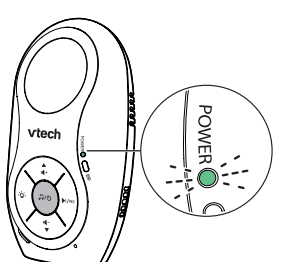


4 POSITIONING THE BABY MONITOR

NOTE

- This audio monitor is intended as an aid. It is not a substitute for proper adult supervision, and should not be used as such.

1. **CAUTION**
 - Keep the baby unit out of the reach of your baby. Never place or mount the baby unit inside the baby's crib or playpen.

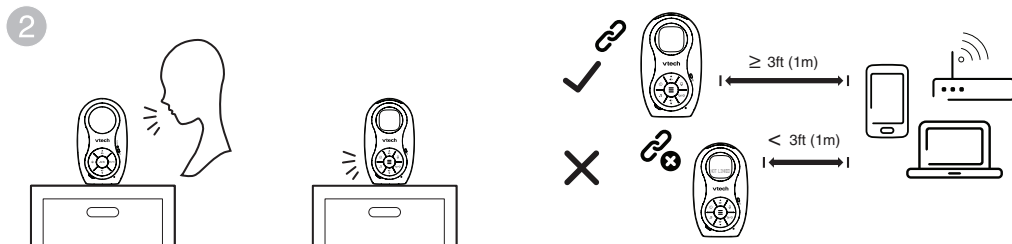

2. **CAUTION**
 - To avoid interference from other electronic devices, place your baby monitor at least 3 feet (1 meter) away from devices such as wireless routers, microwaves, cell phones and computers.


3. **CAUTION**
 - The default speaker volume of your parent unit is level 3. If you experience high-pitched screeching noise from your baby monitor while positioning:
 - Make sure your baby unit and parent unit are more than 6.5 feet (2 meters) apart, OR
 - Turn down the volume of your parent unit.

BASIC OPERATION - BABY MONITOR


Adjust baby unit and parent unit speaker volumes

Press or to adjust your baby unit and parent unit speaker volumes.

Parent unit

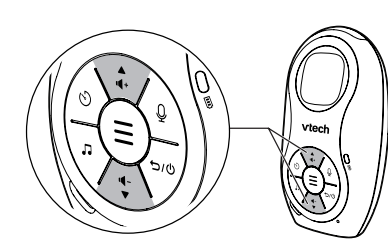


Baby unit

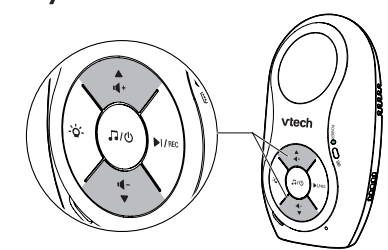


Night light

Press on the baby unit to turn on or off the night light.

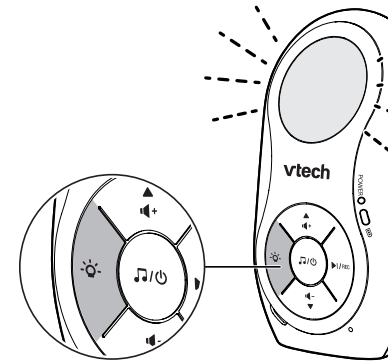


Use the menu

Press to enter the menu, choose a menu item, or save a setting. You can use the parent unit for advanced settings or operations, such as adjust the baby unit sound sensitivity.

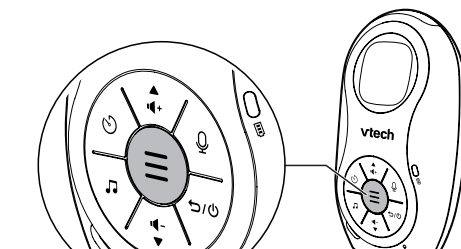

Talk to your baby via the baby unit

1. Press and hold the key on the parent unit.
2. Speak to your parent unit. Your voice is transmitted to the baby unit.
3. When finish talking, release the key and hear your baby again.

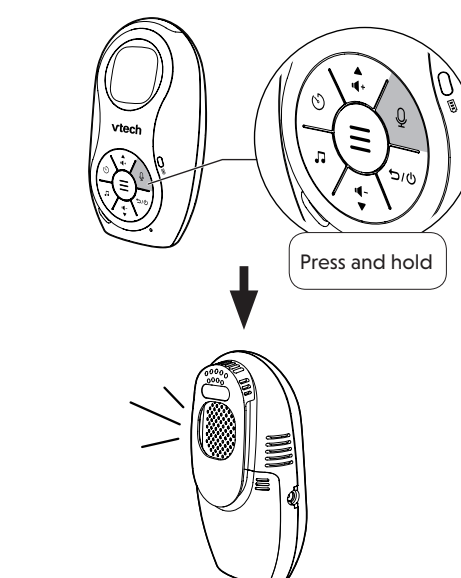

SET UP ALARM TIMER


Set up countdown alarm

You can set up an alarm reminder with the parent unit.

1. Press when the parent unit is not in use.
2. Press or to increase or decrease the countdown timer by 30 minute increments with each press. You can set the timer up to a maximum of 24 hours.
3. Press or to confirm your selection. The screen displays **SAVED** and you hear a confirmation tone.

NOTES

- You can check the remaining time by pressing when the alarm timer is running.
- Press to reset the timer to 00:00. Press or to return to idle mode.

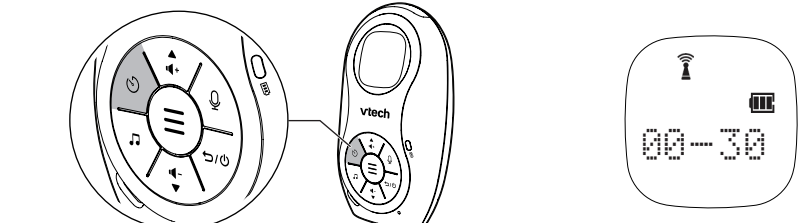


CHANGE THE FACEPLATE (OPTIONAL)

Your parent unit and baby unit come attached with a faceplate, along with two additional faceplates. Change the faceplates to color code each unit for easy recognition.


Detach the faceplate

TIP: INSERT A KEY/CARD INTO THE FACEPLATE GAP AND PLACE INWARD PRESSURE TO DIG AND LIFT THE FACEPLATE UPWARDS.

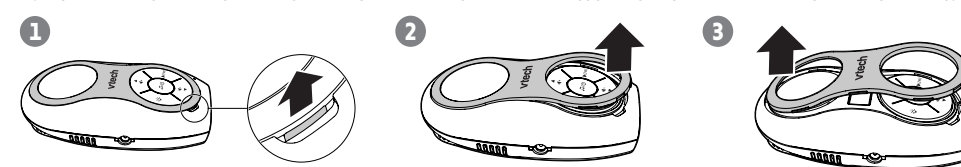


Attach the faceplate

TIP: ATTACH THE TOP-MOST THEN BOTTOM-MOST FACEPLATE TABS INTO THE UNIT HOLES, THEN SNAP THE FACEPLATE INTO PLACE.

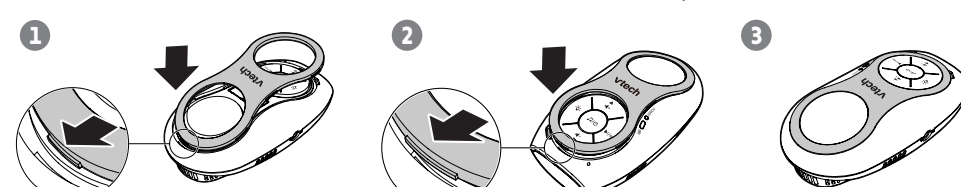

OVERVIEW - BABY UNIT

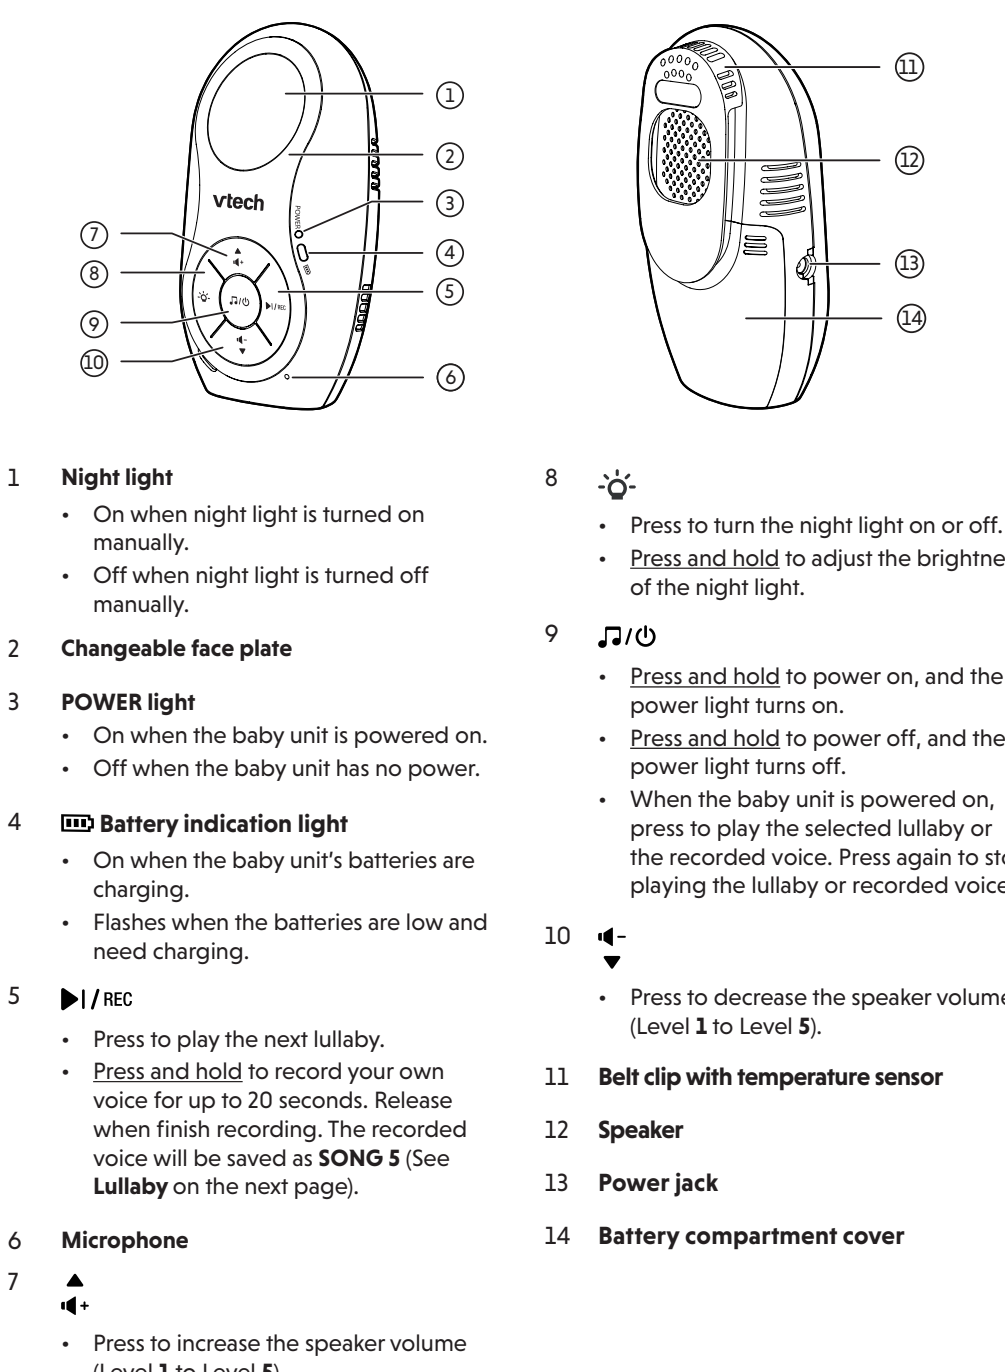

OVERVIEW - PARENT UNIT

