## 

## Zero Li-ion Q1.1

The rechargeable, battery-powered motor for small to medium shades in residential and small commercial projects.



#### Patented Motor Head Design

Offers the smallest light-gap and antenna cable can be concealed within the motor head.



#### **Innovative Motor Cap**

Optional, custom-designed accessory for no visible wires.



#### **Quiet Operation**

Superior acoustic performance makes this our quietest motor range yet.



#### **Elegant Soft Stop**

Slows the motor down before coming to a complete stop at the limit or target position.



#### **Battery Check Action**

When paired with a remote, motor will move shade to indicate battery percentage.



#### Micro USB Charging

Custom motor charger not required. Utilise any micro USB cable and charger to renew battery.



#### Secure Hold

Motor head design accommodates bracket with a 12mm tongue for a more secure fit.



#### Simplified RetroFit

Motor can be swapped yet system retains deductions, bracket adjustments are eliminated and minimal light-gap is achieved.







### **Product Specifications**

Part #: MT01-1325-069033 ZERO LI-ION 1.1NM Q MOTOR [Ø25/5V/20RPM]


Voltage	5	Limit Switch Type	Electronic
Torque	1.1Nm	Current	0.96 A
Max Run Time	12 min.	Battery Size/Type	2600mAH
Speed	20 RPM (Adjustable to 24 or 28)	Temp Working Range	32°F to 140°F (0°C to 60°C)
Radio Frequency	433.92 MHz	Insulation Class	III
RF Modulation	FSK	Sound Level	~38 dB
IP Rating	IP20	Power	8 W


#### Compatible Tubes







S35 - HD











#### **Applications**

- Roller Shades
- Roman Shades

#### Dimensions

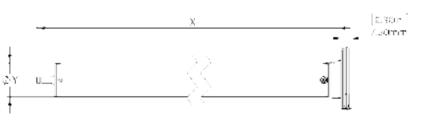





DIM X	DIM Y	Ø Head Diameter	
[21.72"] 552mm	[0.98"] 25mm	[1.87"] 47.5mm	

#### Compatible Products

# 7

Controllers





Push Remotes



**Charging Options** 



Solar Panel

Wall Charger

#### Motor Cap



Sensors



Sun Sensor