

2-Port Dual-Monitor HDMI/DisplayPort KVM Switch - 4K 60Hz - USB 5Gbps


Product ID

P2ADDH462-KVM-SWITCH

Front View



Rear View

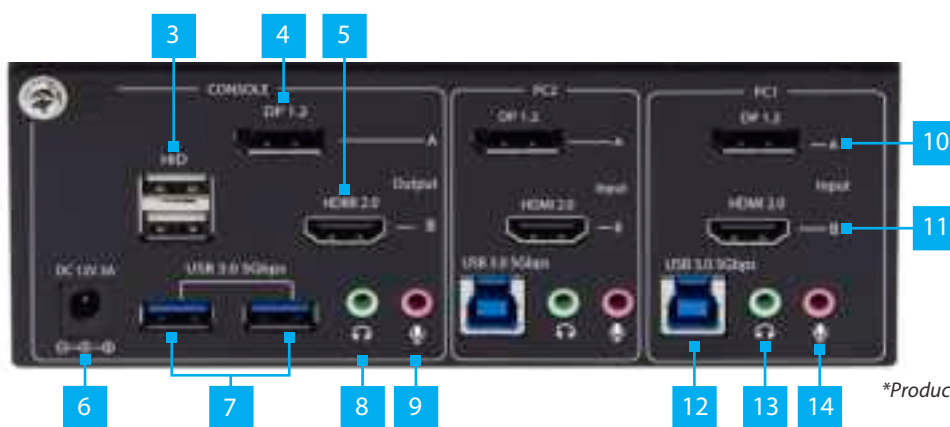

*Product may vary from image

Component		Function
1	LED Indicators	<ul style="list-style-type: none"> PC LED: Solid Green when a Host Connection is detected PC LED: Blinking Green when a Host Connection is not detected Hub LED: Solid Red when the PC Port selected
2	Push Button Selector	<ul style="list-style-type: none"> Press the Button to switch to the corresponding PC Port
3	USB HID Ports	<ul style="list-style-type: none"> Connect a Human Interface Device (HID) (e.g. Keyboard, Mouse, Trackpad, Number Keypad, or Drawing Tablet)
4	Console DisplayPort Output	<ul style="list-style-type: none"> Connect to a DisplayPort Monitor
5	Console HDMI Output	<ul style="list-style-type: none"> Connect to an HDMI Monitor
6	DC Power Input Port	<ul style="list-style-type: none"> Connect the supplied Universal Power Adapter to the KVM Switch
7	USB 5Gbps Hub Ports	<ul style="list-style-type: none"> Connect a USB 5Gbps Peripheral Device
8	Console Audio Output Port	<ul style="list-style-type: none"> Green: Connect an Audio Device (e.g. Speakers or Headphones)
9	Console Audio Input Port	<ul style="list-style-type: none"> Pink: Connect an Audio Input Device (e.g. Microphone)
10	DisplayPort Inputs	<ul style="list-style-type: none"> Connect to a DisplayPort Output Port on PC 1 - 2
11	HDMI Inputs	<ul style="list-style-type: none"> Connect to an HDMI Output Port on PC 1 - 2
12	PC 1 - 2 USB Host Connection	<ul style="list-style-type: none"> Connect to a Computer with a USB 5Gbps Port
13	PC 1 - 2 Headphone Port	<ul style="list-style-type: none"> Connect to a Headphone Port on PC 1 - 2
14	PC 1 - 2 Microphone Port	<ul style="list-style-type: none"> Connect to a Microphone Port on PC 1 - 2

Package Contents

- KVM Switch x 1
- Universal Power Adapter (NA/EU/UK/ANZ) x 1
- Quick-Start Guide x 1

Requirements

For the latest manuals, product information, technical specifications, and declarations of conformance, please visit:
www.StarTech.com/P2ADDH462-KVM-SWITCH

Source PCs

- DisplayPort Enabled Computer x 2
- DisplayPort Cable x 2
- HDMI Cable x 2
- (Optional) 3.5mm TRS Audio Cable x 4

Console

- DisplayPort Display x 1
- DisplayPort Cable x 1
- HDMI Display x 1
- HDMI Cable x 1
- USB Mouse x 1
- USB Keyboard x 1
- (Optional) Audio Devices (e.g. Headphones/Microphone) x 2
- (Optional) SuperSpeed USB 5Gbps Devices x 2

Installation

Connect the Console

Note: Power off all Computers, Displays, and Peripherals before completing the following steps.

1. Connect the **DisplayPort Display** to the **Console DisplayPort Port**, located on the rear of the **KVM Switch**, using a **DisplayPort Cable** (sold separately).
2. Connect the **HDMI Display** to the **Console HDMI Port**, located on the rear of the **KVM Switch**, using an **HDMI Cable** (sold separately).
3. Connect a **USB Mouse** and a **USB Keyboard** to the **Console USB HID Ports**, located on the rear of the **KVM Switch**.
4. (Optional) Connect **Headphones** or **Speakers** to the **Console Audio Output Port**, located on the rear of the **KVM Switch**, using a **3.5mm Audio Cable** (sold separately).
5. (Optional) Connect a **Microphone** to the **Console Audio Input Port**, located on the rear of the **KVM Switch**, using a **3.5mm Audio Cable** (sold separately).
6. (Optional) Connect up to two **SuperSpeed USB 5Gbps Devices** to the **Console USB Hub Ports**, located on the rear of the **KVM Switch**.

Connect the PCs

7. Connect a **DisplayPort Cable** (sold separately) from the **DisplayPort Output Port** on the **Computer** to the **PC 1 DisplayPort Input Port**, located on the rear of the **KVM Switch**.
8. Connect an **HDMI Cable** (sold separately) from the **HDMI Output Port** on the **Computer** to the **PC 1 HDMI Input Port**, located on the rear of the **KVM Switch**.
9. Connect a **USB to USB 5Gbps Type-B Cable** (sold separately) from a **USB Port** on the **Computer** to the **PC 1 USB Host Connection**, located on the rear of the **KVM Switch**.
10. (Optional) Connect a **3.5mm Audio Cable** (sold separately) from a **Headphone Port** on the **Computer** to the **PC 1 Headphone Port**, located on the rear of the **KVM Switch**.
11. (Optional) Connect a **3.5mm Audio Cable** (sold separately) from a **Microphone Port** on the **Computer** to the **PC 1 Microphone Port**, located on the rear of the **KVM Switch**.
12. Repeat **Steps 1 to 5** for the remaining **PC**.
13. Connect the included **Power Adapter** from an available **Wall Outlet** to the **DC Power Input Port**, located on the rear of the **KVM Switch**.
14. Power on all connected **Peripheral Devices**.

