


4" Slim Selectable Night Light

Experience vibrant task lighting during the day, and cozy illumination at night. Toggle your wall switch on/off/on to activate a relaxing nightlight mode, and select from 5 color temperatures to set the perfect tone in any setting.

MODELS

DL_SL4_NL-WH-2750K

LIGHT DISTRIBUTION ANGLE

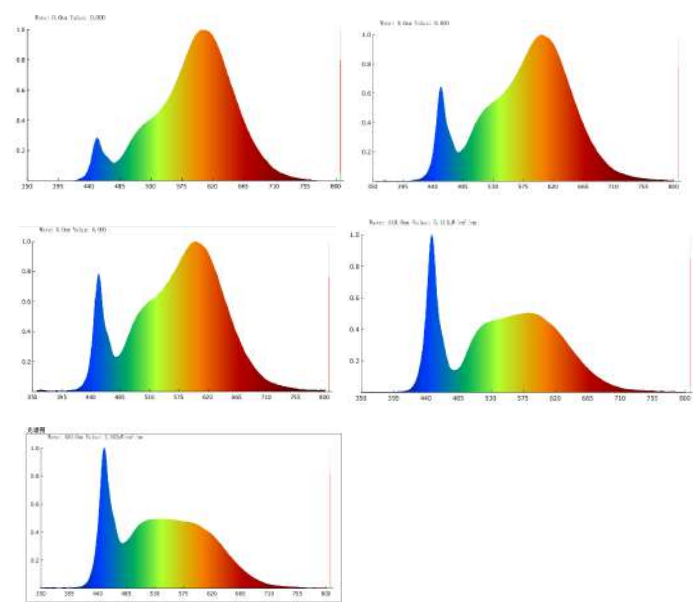

CERTIFICATIONS



SPECIFICATIONS

| | |
|--------------|-------|
| Voltage | 120 V |
| Wattage | 11 W |
| Power Factor | 0.9 |

LIGHTING PERFORMANCE

| | |
|----------------|--|
| Lumens | 900 lm |
| Selectable CCT | 2700 K, 3000 K, 4000 K, 5000 K, 6000 K |
| CRI | 80+ |
| Beam Angle | 120° |
| Dimmable | YES |
| Efficacy | 82 lm/W |

ENVIRONMENT

| | |
|-----------------------|-----------------|
| Operating Temperature | -4 °F to 113 °F |
| Moisture Rating | Damp Rated |

CONSTRUCTION

| | |
|------------------|----------------------|
| Housing Material | Plastic + Metal Jbox |
| Weight | 0.47 lbs |

LIFETIME

| | |
|------------------|--------------|
| Average Lifetime | 50,000 Hours |
| Warranty | 7 Years |

4" Slim Selectable Night Light

Experience vibrant task lighting during the day, and cozy illumination at night. Toggle your wall switch on/off/on to activate a relaxing nightlight mode, and select from 5 color temperatures to set the perfect tone in any setting.

| BRAND | MODEL |
|---------|----------------|
| LUTRON | CTCL-153PDH-WH |
| LUTRON | DVCL-153P-WH |
| LUTRON | DVELV-300P-WH |
| LUTRON | DVRP-253P-WH |
| LUTRON | IPI06-1LZ |
| LUTRON | LGCL-153PLH |
| LUTRON | MACL-153MH-WH |
| LUTRON | MSCL-OP153M |
| LUTRON | PD-6WCL-WH |
| LUTRON | P-PKG1WB-WH |
| LUTRON | P-PKG1W-WH |
| LUTRON | STCL-153PH-WH |
| LUTRON | TGCL-153PH-WH |
| LUTRON | TTCL-100H-BR |
| LEVITON | 6672-1LW |
| LEVITON | 6674-10W |
| LEVITON | D26HD-2RW |
| LEVITON | DDE06-BLZ |
| LEVITON | DDMX1-BLZ |
| LEVITON | DSE06-10Z |

We highly recommend using a ELV (electronic low voltage) dimmer compatible with LED lights. Buzzing or flickering is typically an indication that the dimmer and lights used are not compatible. Please consult dimmer manufacturer for maximum wattage capacity.

*May experience "pop-on" behavior, in which lights cannot be turned on immediately to their minimum level. To resolve this issue, first raise the slider switch above the minimum level to turn the lights on, then dim to a lower light level as needed.