



6.2.3 CREATING A ONE TIME PASSCODE OFFLINE


- ③ Select "One Time Code" under "Offline Code".

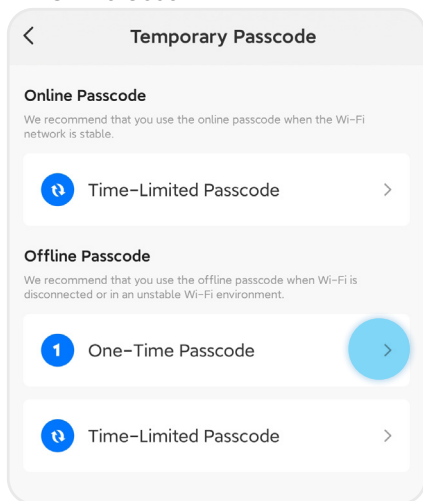


- ④ Click "Add".

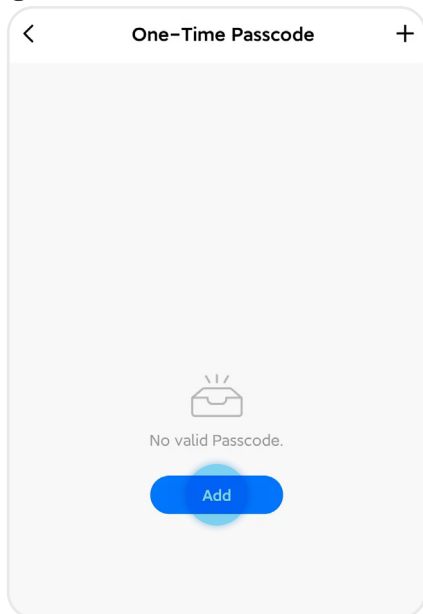

- ⑤ Click "Get Passcode".

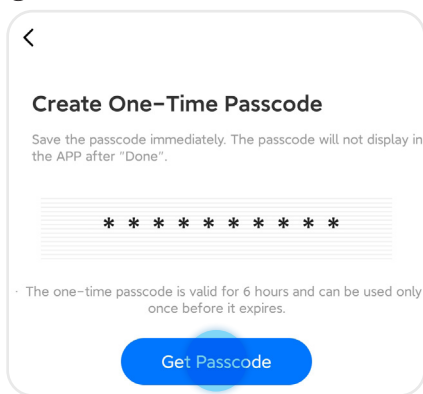

- ⑥ Copy the passcode and save it. Edit the passcode name and click "Done".


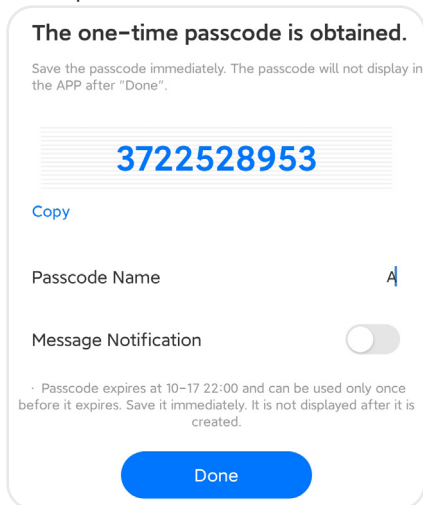


Tip

The offline one-time passcode will not appear after you have clicked "Done". Please write it down or save it in another location, such as the NOTES application on your smart device.


6.2.4 CREATING A TIME LIMITED PASSCODE OFFLINE

- ① Enter the Blusafe Smart Application on your smart device, and enter the lock interface.
- ② Click "Temporary Passcode" at the bottom of your screen.

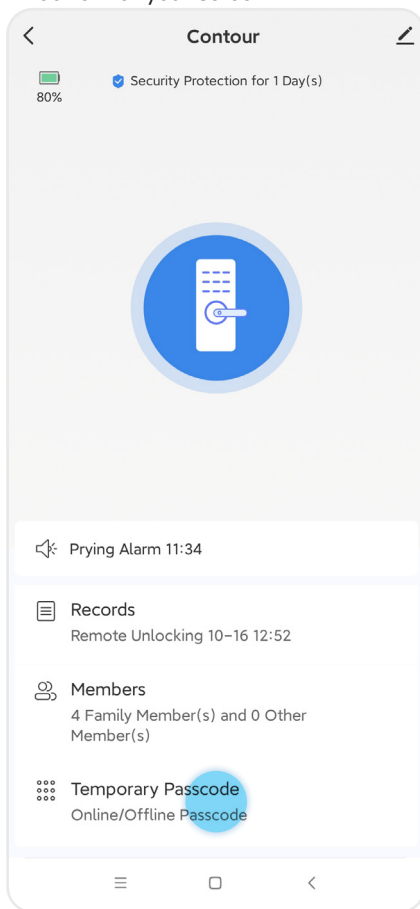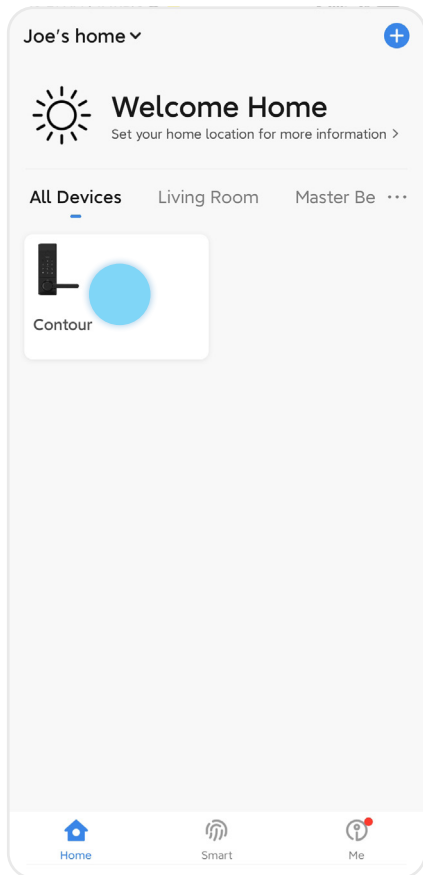


6.2.4 CREATING A TIME LIMITED PASSCODE OFFLINE


- ③ Select "Time Limited Code" under "Offline Passcode".

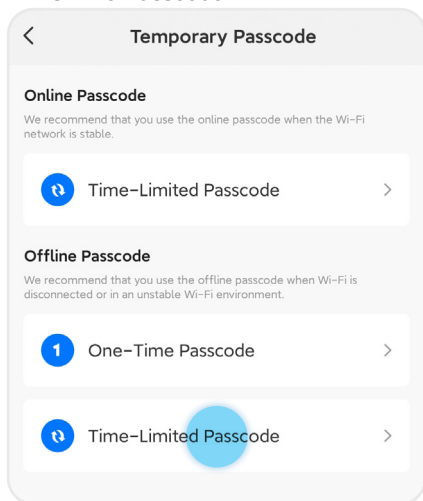


- ④ Click "Add".

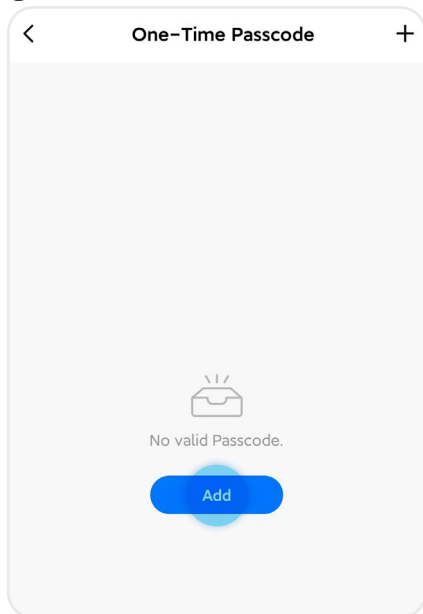

- ⑤ Select the start and end dates / times (Year/ Month/Date/Hour/Minute).

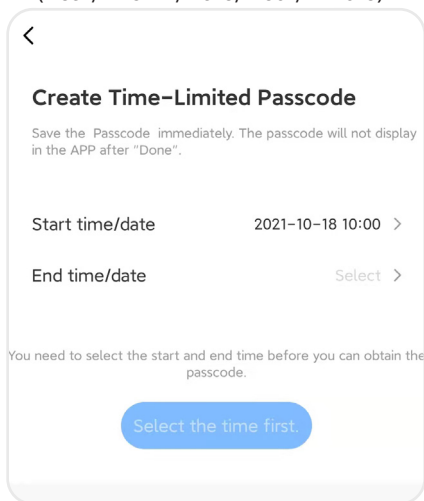

- ⑥ Click "Get passcode".

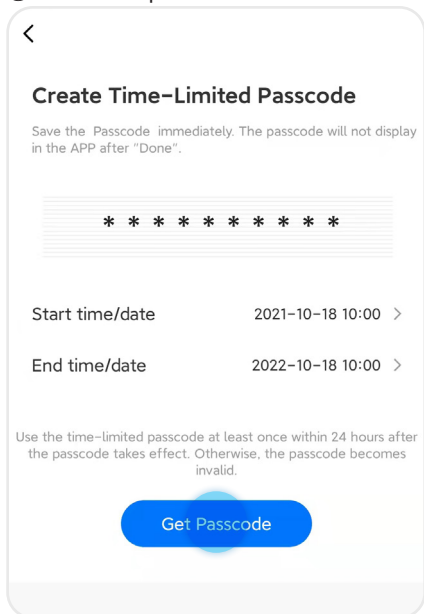

6.2.4 CREATING A TIME LIMITED PASSCODE OFFLINE

- ⑦ Copy the passcode and save it. Edit the passcode name and click "Done".

Important !



- The offline time limited passcode will need to be used within 24 hours after it has been created. After 24 hours, the offline time limited passcode will become invalid.
- Only one offline time limited passcode can be created within the effective timeframe.

Tip



The offline time limited passcode will not appear after you have clicked "Done". Please write it down or save it in another location, such as the NOTES application on your smart device.



The time-limited passcode is obtained.

Save the Passcode immediately. The passcode will not display in the APP after "Done".

6226943411

Copy

Passcode Name



Start time/date

2021-10-18 10:00

End time/date

2022-10-18 10:00

Message Notification



· Use the time-limited passcode at least once within 24 hours after the passcode takes effect. Otherwise, the passcode becomes invalid. · Save the passcode immediately. The passcode is not displayed after it is created.

Done





6.2.5 CLEARING SELECTED OFFLINE TIME LIMITED PASSCODE

Note


You can only clear offline time limited passcode. The offline one-time passcode cannot be cleared.

- ① Enter the Blusafe Smart Application on your smart device, and enter the lock interface.
- ② Click "Temporary Passcode" at the bottom of your screen.

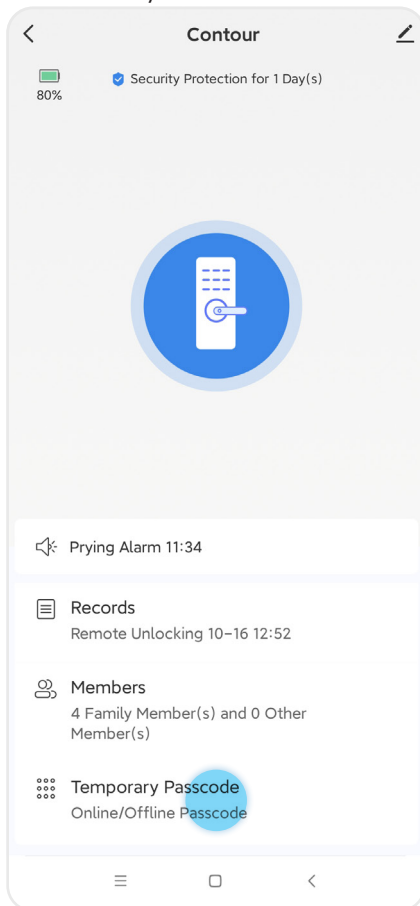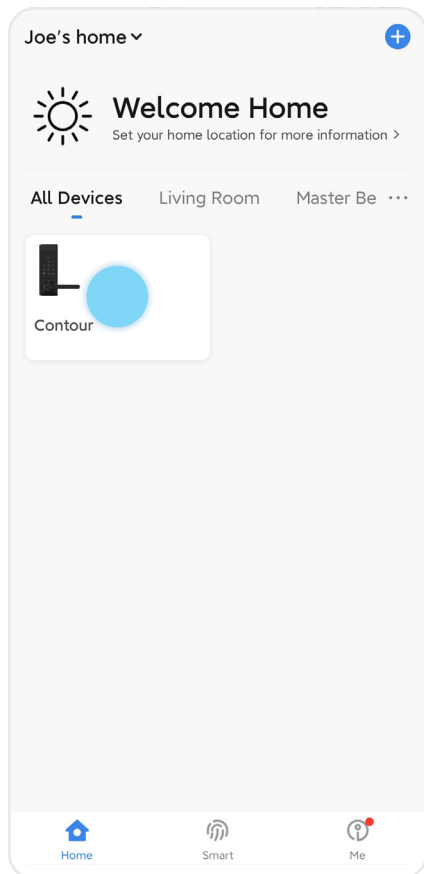


6.2.5 CLEARING SELECTED OFFLINE TIME LIMITED PASSCODE


- ③ Select "Time Limited Code" under "Offline Passcode".

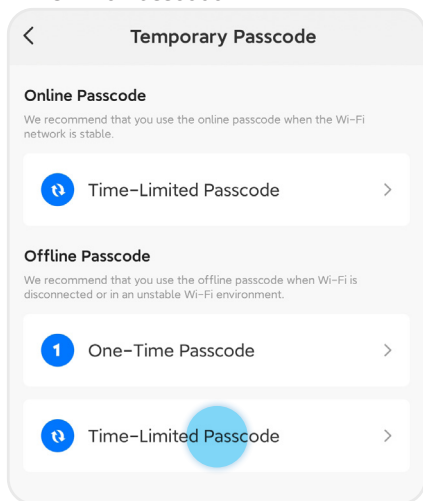

- ⑤ Click "Delete".

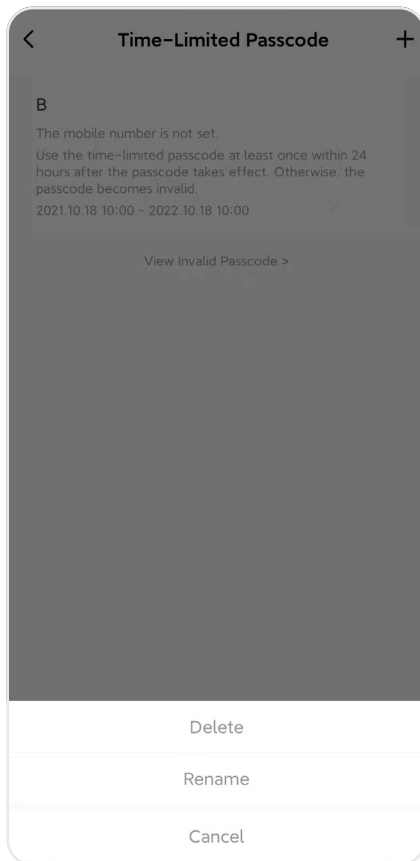


- ④ Select the passcode name you wish to remove.

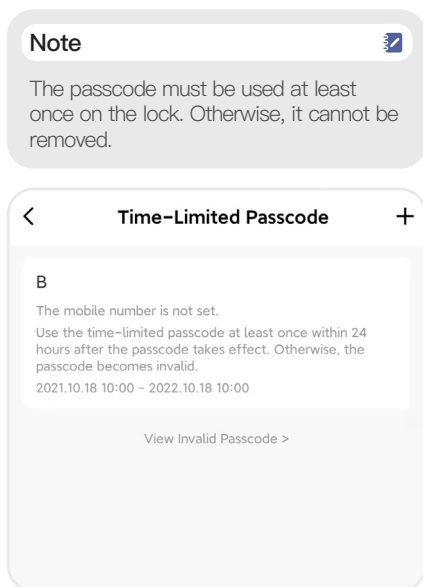


6.2.5 CLEARING SELECTED OFFLINE TIME LIMITED


⑥ Click "Get clear code".

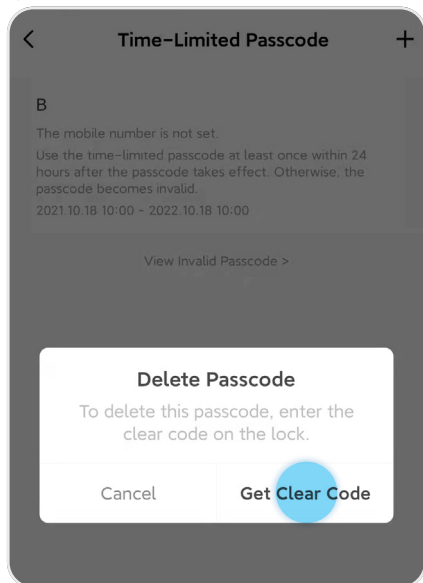


⑦ Click "Get clear code".

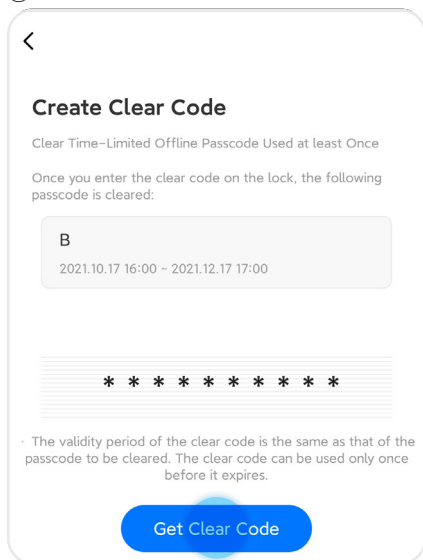

⑧ Copy the passcode and save it. Edit the passcode name and click "Done".

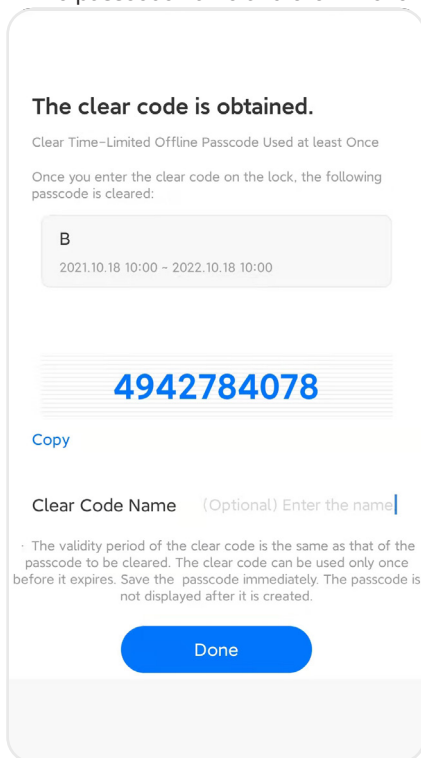

⑨ Input the clear code into the lock to erase the selected offline passcode.

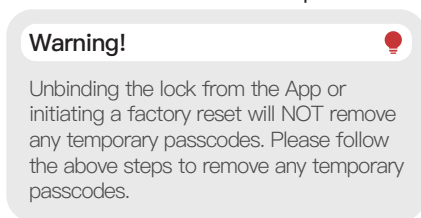



UNLOCKING YOUR SMART LOCK


7.1 INTRODUCTION

Your Contour / Contour V smart lock can be unlocked using fingerprint / keycard / passcode / manually. Please refer to the Lock User Manual for detail instructions.

Important !



Before the lock is setup, the Contour / Contour V smart lock can be unlocked by any fingerprint, keycard or default passcode 123456.

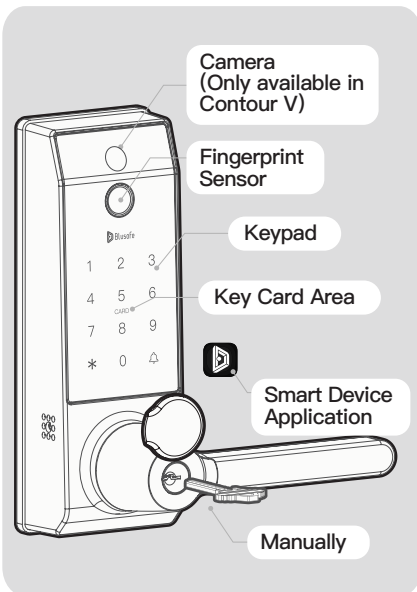

7.2 DOORBELL UNLOCKING



The Contour / Contour V can also be unlocked remotely via App when a guest rings the doorbell on the lock.

Important !




Please turn on the "Notifications" for Blusafe Smart App on your smart phone. This will enable notifications such as doorbell, anti-prying alerts, unlock logs etc.

- ① Enter the Blusafe Smart Application on your smart device, and enter the lock interface.
- ② Enter the lock interface.

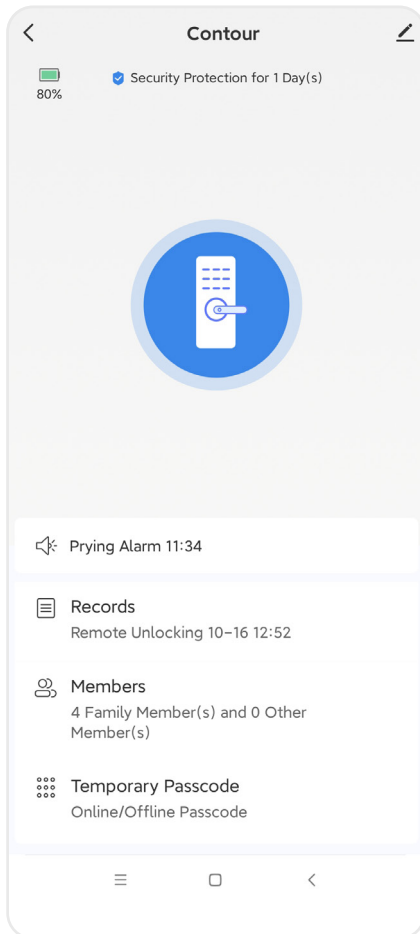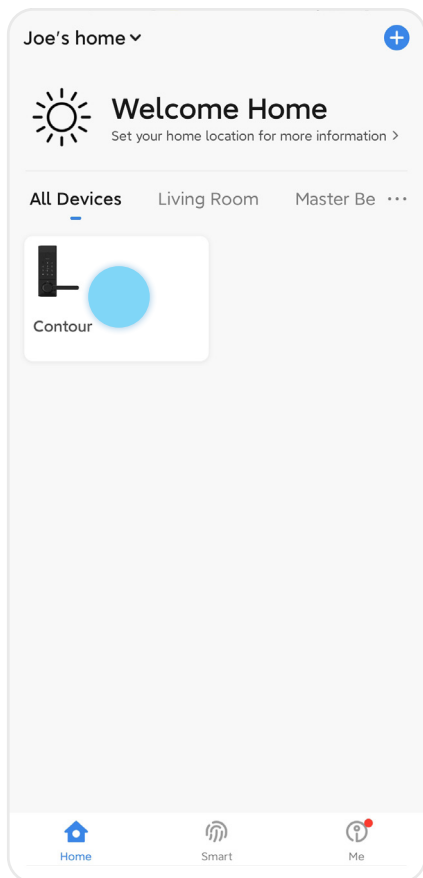

7.2 DOORBELL UNLOCKING

- ③ A popup will display as shown below. Slide the key bar to the right to accept the unlock request, otherwise slide it to the left to deny.



53

Remote Unlocking Request

Reject <<



>>> Agree

Important !



Sometimes the popup may take up to 10 seconds to be displayed, depends upon the Wi-Fi quality. Try click the photo area a few times to refresh if it doesn't display.

Note



If you have purchased the Contour V, a photo of the guest will be taken and display on the App automatically.



53

Remote Unlocking Request

Reject <<



>>> Agree




OTHER FUNCTIONS



8.1 SEARCH RECORDS

The home members can access the unlock records / activity log. This shows a record of every time the door was unlocked, at what time it was unlocked, and by which users. (This is why it is important to link the fingerprints, keycards and passcodes to designated members).

① Enter the Blusafe Smart Application on your smart device, and enter the lock interface.


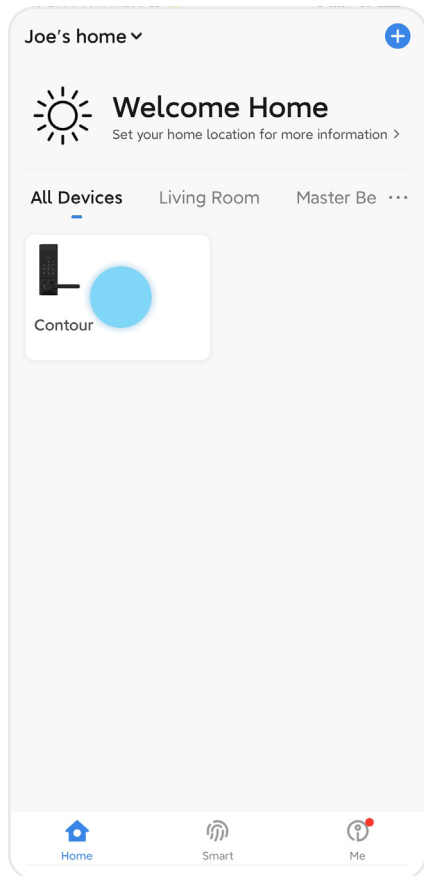


② Click the "Records" to view all logs of unlocks.

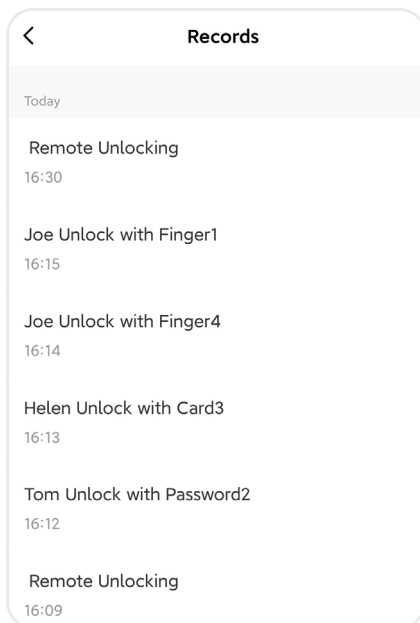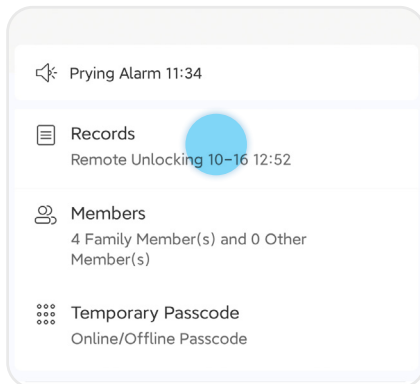

8.2 ALERTS




Alerts will be shown in the App if special circumstances occur. For example, a system lockout, a doorbell ring, or anti-prying triggers.

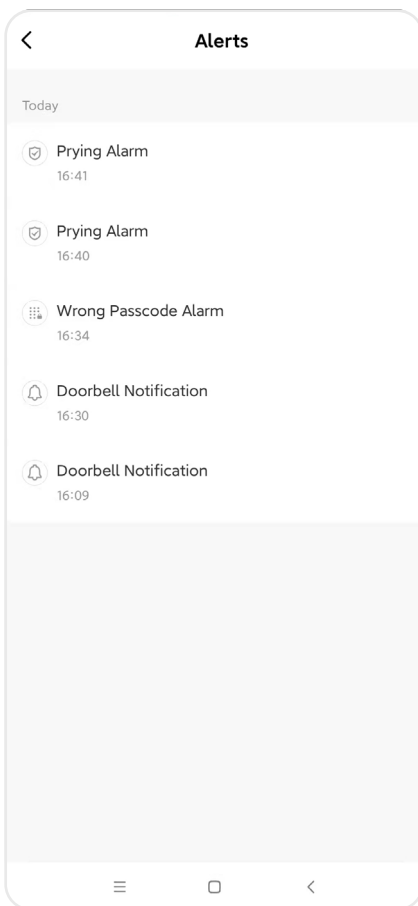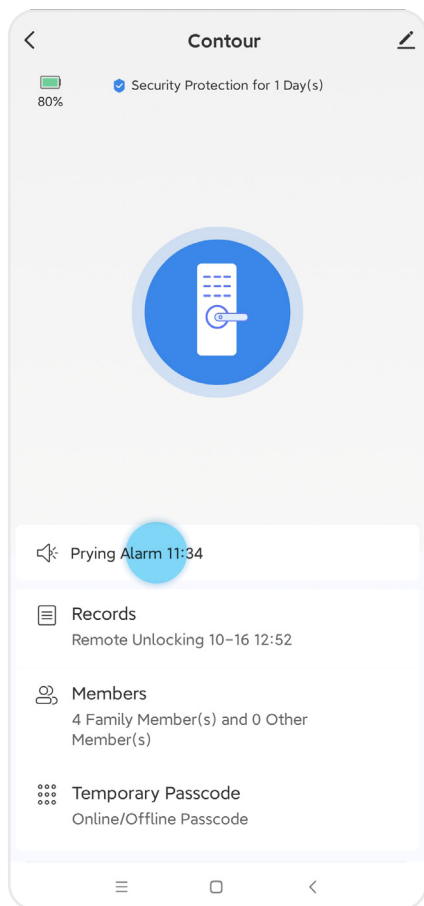

8.3 ANTI-PRYING FUNCTION


If there is an attempt to force the lock open or physically attack the lock, the anti-prying (tamper) alarm will be triggered. A warning alarm will sound, which will last for 60 seconds and an alert will also show on the App. During this time, unlocking the lock using a registered fingerprint or key card, or removing the batteries will turn off the alarm.

Please activate the anti-prying function AFTER installation. For instructions on how to turn on / off the anti-prying (tamper) function on the lock, please refer to the Lock User Manual for details.

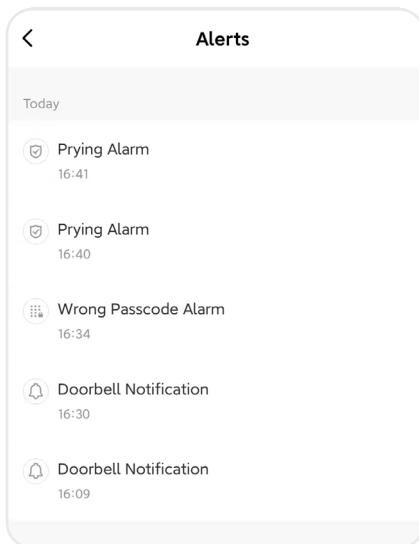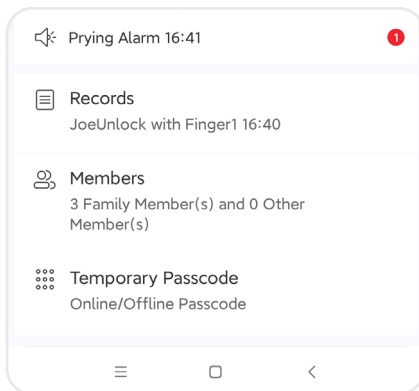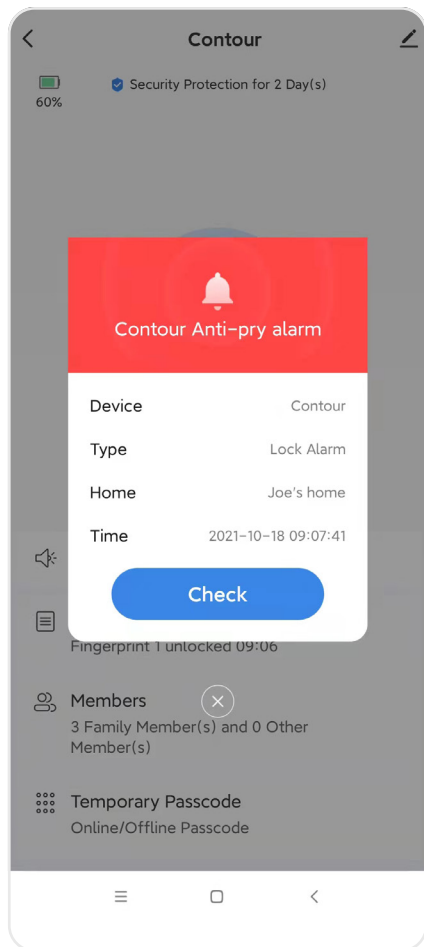


9 UNBIND


- ① Enter the Blusafe Smart Application on your smart device, and enter the lock interface.

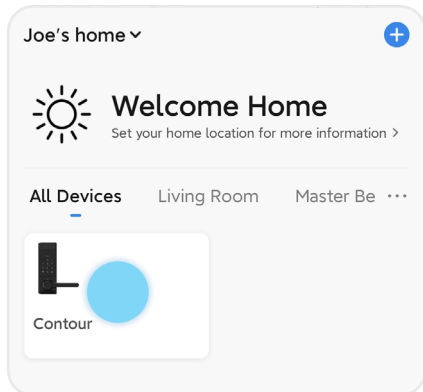


- ② Click the pencil icon in the top right corner of your screen.

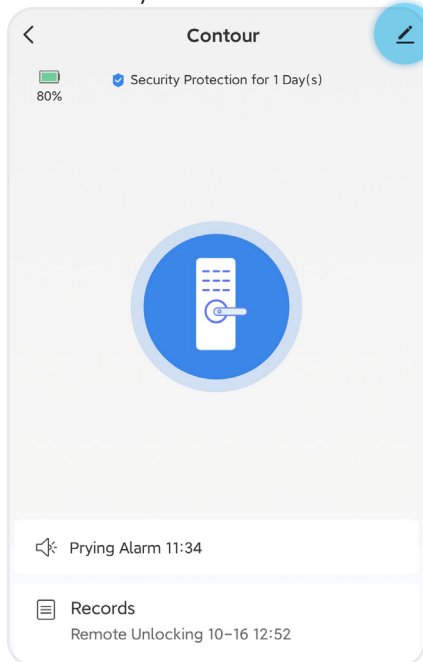

- ③ Click "Remove Device".

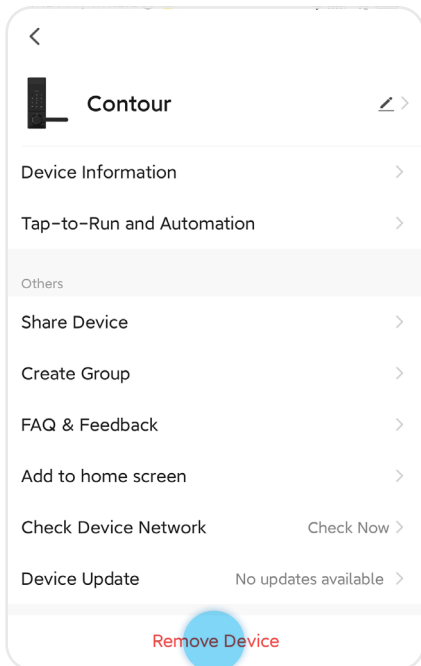


- ④ Click "Disconnect and wipe data".

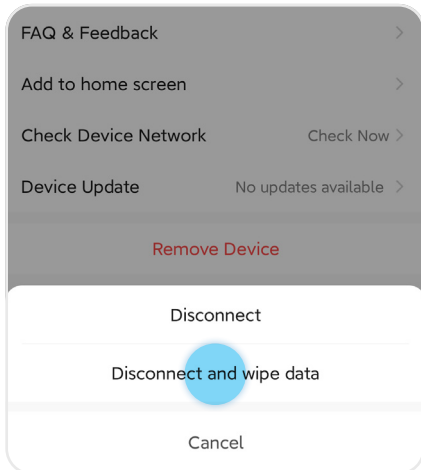


9 UNBIND

⑤ Click "Confirm".

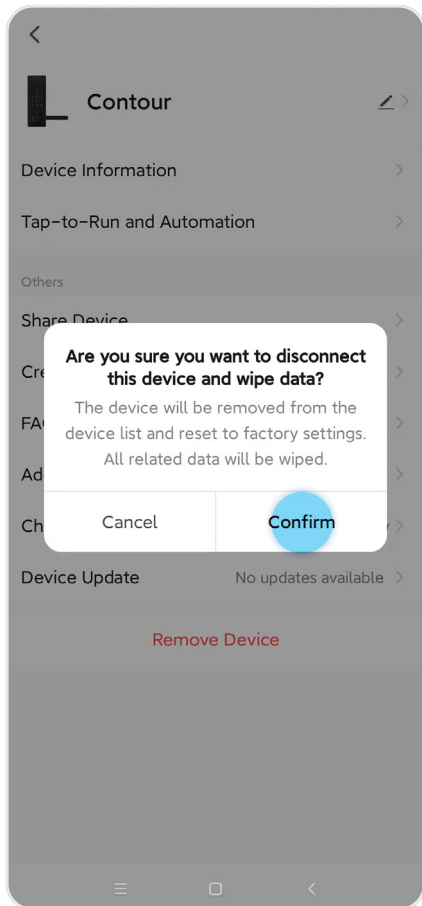

⑥ The unbinding is complete.

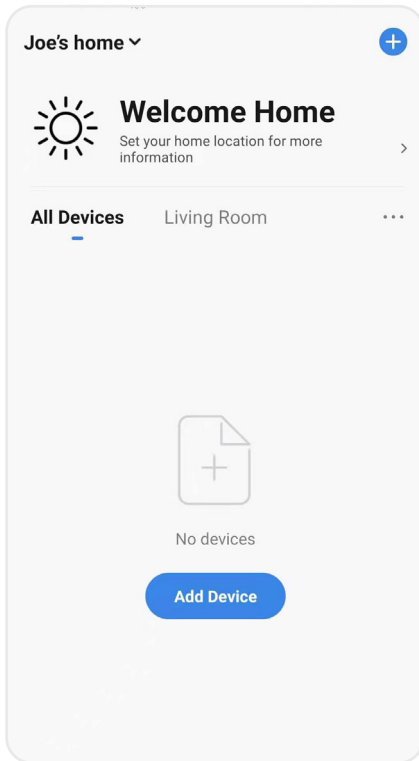


Important !




The unbinding only disconnects the App with lock. All user data registered on the lock still exist. In order to clear all user data on the lock, please follow the "Factory Reset" instruction in the Lock User Manual.

10 DELETING YOUR BLUSAFE SMART APP ACCOUNT


- ① Enter the Blusafe Smart Application on your smart device. Select "Me" at bottom right corner.

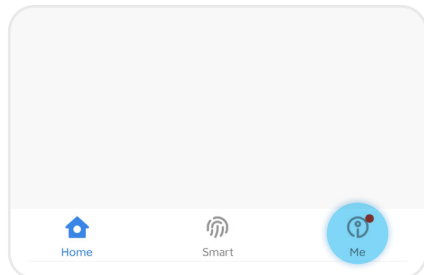


- ② Click "Settings".

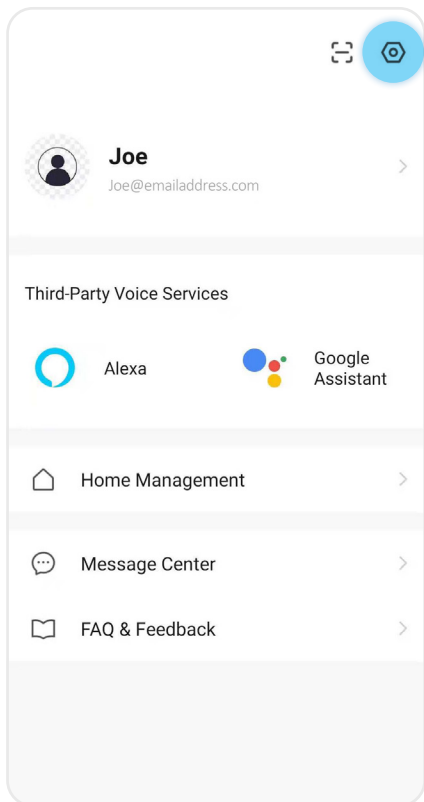

- ③ Click "Account and Security".

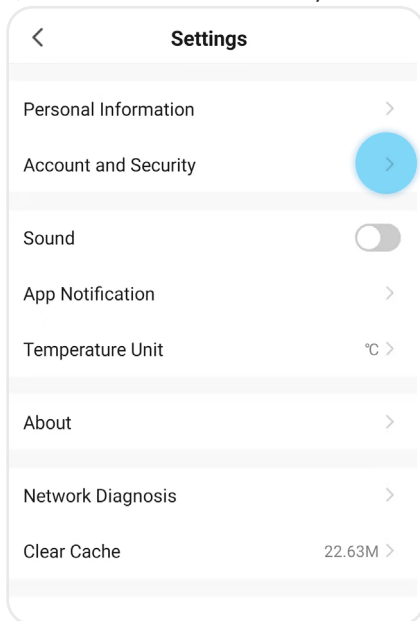

- ④ Select "Delete Account".

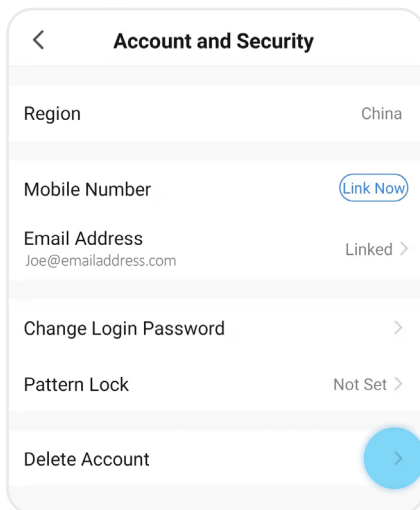

10 DELETING YOUR BLUSAFE SMART APP ACCOUNT

⑤ Click "Continue".

If you confirm to "delete account", the account will be deleted on

9/11/2021 00:00:00

Your account data will be deleted.

If you don't want to delete account, please log in to the App before the above mentioned time to withdraw the request.

Thanks for using our App.

Continue

⑥ Click "Get Verification Code".



Delete Account

Click "Get Verification Code" and it will be sent to your Email: Joe@emailaddress.com

Get Verification Code

⑦ Enter the verification code that been sent to your account email address.



Enter Verification Code

A verification code has been sent to your email
Joe@emailaddress.com Resend(56s)

⑧ Click "Delete".



Delete Account

Are you sure to delete account?

All the user data under this account will be permanently wiped.

Delete

Warning!



This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note



This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help


Note



This device and its antenna(s) must not be co-located or operation in conjunction with any other antenna or transmitter

RF Exposure Statement

To maintain compliance with FCC's RF Exposure guidelines, this equipment should be installed and operated with minimum distance of 20cm the radiator your body. This device and its antenna(s) must not be co-located or operation in conjunction with any other antenna nr transmitter.

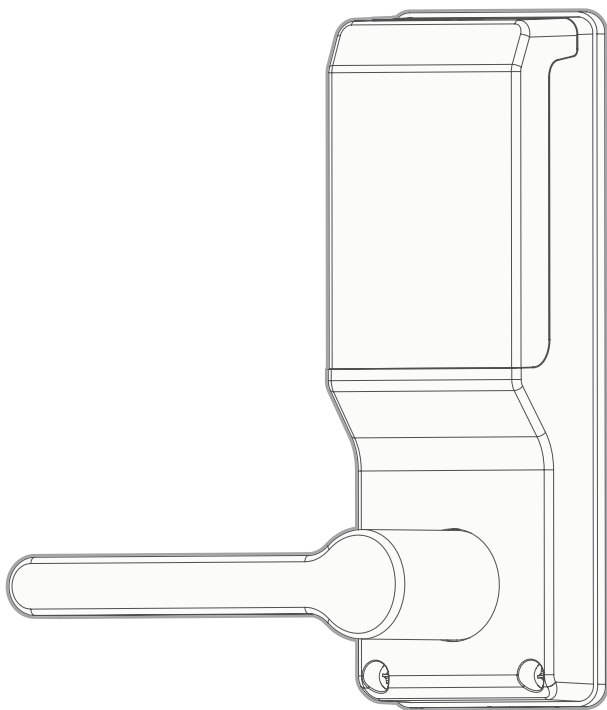

Please scan the QR to get newest
manuals on Blusafe Products

