



FabricSkin Keyboard Folio i5  
罗技iK810布艺键盘保护套套




Setup Guide | 设置指南



## Contents / 目录

|                                                                        |                   |                      |                    |
|------------------------------------------------------------------------|-------------------|----------------------|--------------------|
| <a href="#">English</a>                                                | <a href="#">3</a> | <a href="#">简体中文</a> | <a href="#">12</a> |
| <a href="http://www.logitech.com/support">www.logitech.com/support</a> |                   |                      | <a href="#">21</a> |

# Know your product

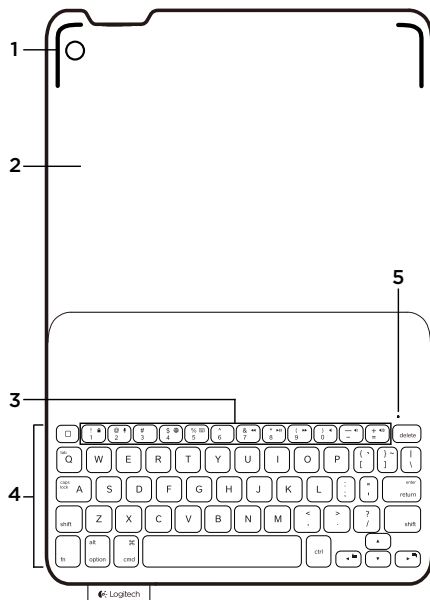


1. iPad holder
2. Protective folio
3. Function keys
4. Keyboard
5. Bluetooth® and battery status light
6. Reset button
7. Micro-USB charging port
8. Bluetooth connect button
9. Micro-USB charging cable
10. Product documentation




## Setting up the keyboard folio

### Getting started

1. Open the keyboard folio, make sure the edge of your iPad is aligned with the iPad holder and push down:



2. Move the keyboard folio into the typing position:




The keyboard turns on automatically.

### Establishing connection with your iPad

The keyboard folio links to your iPad via a Bluetooth connection. The first time you use the keyboard folio, you must pair it with your iPad.

The status light blinks blue to indicate that the keyboard is discoverable, ready for pairing with your iPad.

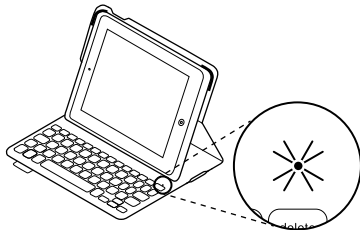

The first time you use the keyboard it remains discoverable for 15 minutes.

If the status light turns red, charge the battery. For more information, see “Charging the keyboard battery.”

To pair your keyboard folio with your iPad:


1. On your iPad:
  - Make sure your iPad’s Bluetooth feature is on. Select Settings > Bluetooth > On.
  - Select “FabricSkin Keyboard Folio i5” from the Devices menu.

2. If your iPad requests a PIN, enter it using the folio keyboard (not on your iPad).

When successful connection is made, the status light turns solid blue for a short time, and then turns off.

### Connecting to another iPad

1. Move the keyboard folio into the typing position.
2. Make sure your iPad's Bluetooth feature is on. Select Settings > Bluetooth > On.
3. Press the Bluetooth Connect button:

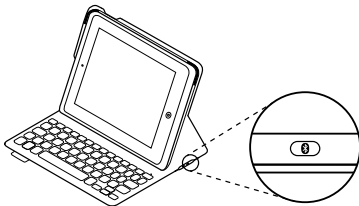

The keyboard is discoverable for 3 minutes.

4. Select "FabricSkin Keyboard Folio i5" on your iPad's Devices menu.
5. If your iPad requests a PIN, enter it using the folio keyboard (not on your iPad).  
When successful connection is made, the status light turns solid blue for a short time, and then turns off.

## Using the keyboard folio


### Two viewing positions

The keyboard folio provides two viewing positions—one for typing and another for browsing.

To type, move the iPad holder into the typing position, aligning it with the built-in magnet to secure it. Turn on the keyboard:




To browse, place the iPad holder in the browsing position remembering to switch off the keyboard to conserve battery power:




If you don't use the keyboard for a while in the typing position, it enters sleep mode automatically. Pressing any key wakes it. Closing the keyboard folio powers off your iPad.

## Detaching your iPad

To detach your iPad from the folio, bend back one of the iPad holder corners:




Your iPad is then released:

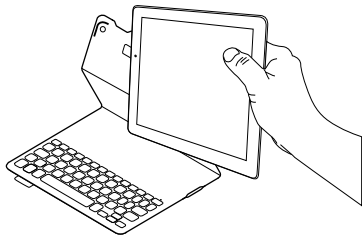

## Storing your iPad for travel

1. Insert your iPad in the iPad holder.
2. Close the keyboard folio:




## Cleaning your folio

Wipe your FabricSkin Keyboard folio with a wet cloth. DO NOT use solvent.

## Status light indicators

Your keyboard folio's status light provides information about the battery power and Bluetooth connection:

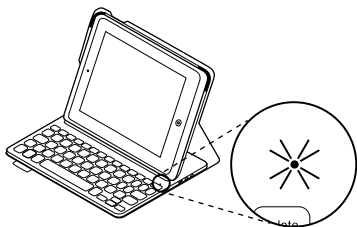

| Light          | Description                                                                                                            |
|----------------|------------------------------------------------------------------------------------------------------------------------|
| Blinking green | The battery is charging.                                                                                               |
| Solid green    | The battery is fully charged (100%).                                                                                   |
| Red            | Battery power is low (less than 10%). Recharge the battery.                                                            |
| Blinking blue  | Fast: The keyboard is in discovery mode, ready for pairing.<br>Slow: The keyboard is trying to reconnect to your iPad. |
| Solid blue     | Bluetooth pairing or reconnection is successful.                                                                       |

## Function keys



**Home = iPad Home screen**



**Fn + 1 = Lock screen**

Locks or unlocks the iPad screen



**Fn + 2 = Siri**

Use your voice to send messages, make calls, schedule meetings, and more



**Fn + 3 = Search**

Launches the iPad search function



**Fn + 4 = Switch language**

Switches the keyboard language



**Fn + 5 = Virtual keyboard**

Shows/hides the virtual keyboard



**Fn + 7 = Previous track**



**Fn + 8 = Play/Pause**



**Fn + 9 = Next track**



**Fn + 0 = Mute**



**Fn + dash = Volume down**



**Fn + plus = Volume up**



**Fn + X = Cut**



**Fn + C = Copy**



**Fn + V = Paste**



**Fn + Left cursor = Select left**

Selects text on the left, word by word



**Fn + Right cursor = Select right**


Selects text on the right, word by word



**Fn + Spacebar =  
Switch applications**

**Note:** To select a function key, press and hold the Fn key, and then press the key indicated above.

## Charging the keyboard battery

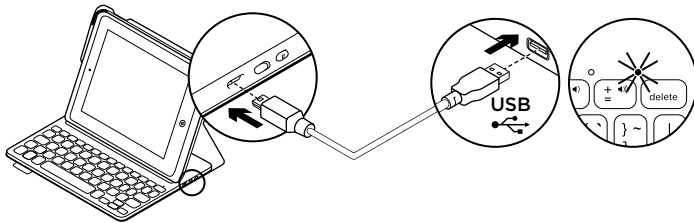

If the status light is red the keyboard folio battery needs to be charged.

1. Plug one end of the micro-USB cable into the charging port, and the other end into a USB port on your computer.

Alternatively, you can use a 5V USB charger, such as that provided with your iPad, providing the power output rating is at least 500mA.

The status light blinks green as the battery charges.


2. Charge the battery until the status light turns solid green.

### Battery information


- A fully charged battery provides about three months of use when the keyboard is used about two hours a day.
- Charge the battery if the status light turns red briefly after the keyboard turns on.
- When not in use, turn off the keyboard to conserve battery power.
- The keyboard enters sleep mode automatically if not used for a while in the typing position. Press any key to wake it.

## Battery disposal at product end of life

1. Pry off top cover of keyboard with screwdriver:

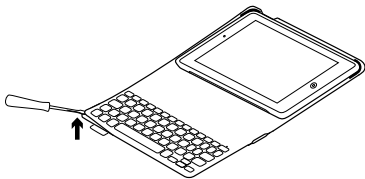

2. Detach battery from circuit board and remove battery:



3. Dispose of your product and its battery according to local laws.



## Visit Product Central

There's more information and support online for your product. Take a moment to visit Product Central to learn more about your new keyboard folio.

**[www.logitech.com/support/fabricskin-keyboard-folio-i5](http://www.logitech.com/support/fabricskin-keyboard-folio-i5)**

Browse online articles for setup help, usage tips, and information about additional features.

Connect with other users in our Community Forums to get advice, ask questions, and share solutions.

Find a wide selection of content including:


- Tutorials
- Troubleshooting
- Support community
- Online documentation
- Warranty information
- Spare parts (when available)

## Troubleshooting

### **The keyboard does not work**

- Press any key to wake the keyboard from sleep mode.
- Move the iPad holder into typing position.  
The keyboard folio does not work if the iPad holder is incorrectly placed.
- Recharge the internal battery.  
For more information, see “Charging the keyboard battery.”
- Re-establish the Bluetooth connection between the keyboard and your iPad.
- Verify that Bluetooth is turned on in your iPad's settings (Settings > Bluetooth > On).
- Choose “FabricSkin Keyboard Folio i5” from the Devices menu on your iPad.  
The status light turns solid blue when Bluetooth connection is established.


## 了解您的产品

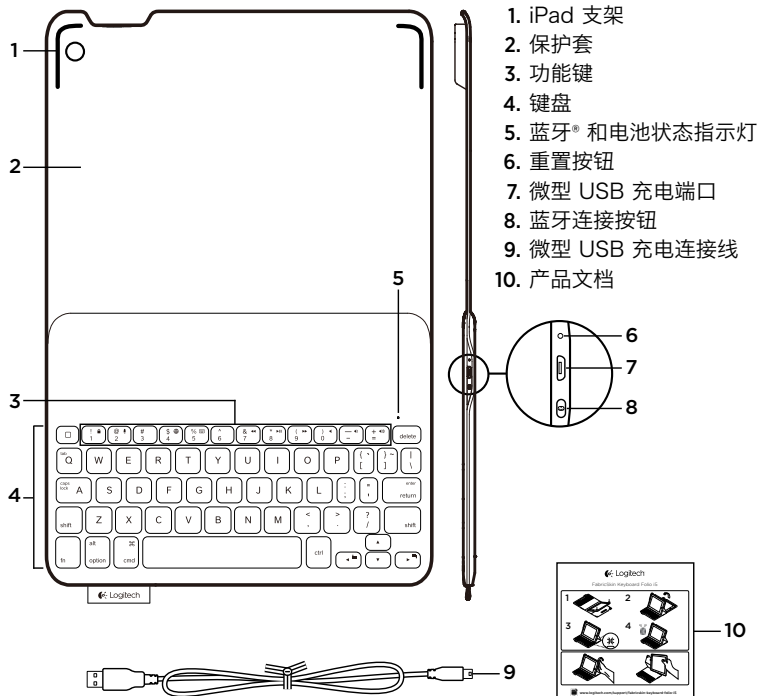


## 设置键盘保护套

### 入门指南

1. 打开键盘保护套，确保 iPad 与 iPad 支架保持对齐，然后将其推入



2. 将键盘保护套移动到打字位置




键盘自动开启。

### 建立与 iPad 之间的连接

键盘保护套与 iPad 之间通过蓝牙进行连接。首次使用键盘保护套时，必须将其与 iPad 进行配对。

状态指示灯闪烁蓝灯，表示键盘处于可被搜索状态，可与 iPad 进行配对。

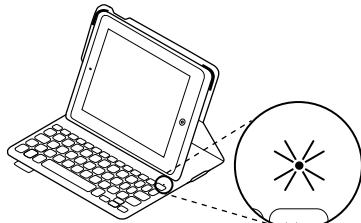

首次使用键盘时，键盘将保持可被搜索状态 15 分钟。

如果状态指示灯变为红灯，请为电池充电。有关详细信息，请参见“为键盘电池充电”。

将键盘保护套与 iPad 进行配对：

1. 在 iPad 上：


- 确保您 iPad 的蓝牙功能已开启。依次选择：“设置” > “蓝牙” > “开启”。
- 从“设备”菜单中选择“FabricSkinKeyboard Folio i5”。

2. 如果 iPad 要求输入 PIN，则使用键盘保护套进行输入（不是在 iPad 上输入）。

成功连接后，状态指示灯将在短时间内变为稳定的蓝光，然后熄灭。

### 连接到其他 iPad

1. 将键盘保护套移动到打字位置。
2. 确保您 iPad 的蓝牙功能已开启。  
依次选择：“设置” > “蓝牙” > “开启”。
3. 按下蓝牙连接按钮：

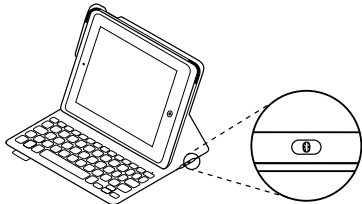

键盘在 3 分钟内将处于可被搜索状态。

4. 在 iPad 的“设备”菜单上选择“FabricSkin Keyboard Folio i5”。
5. 如果 iPad 要求输入 PIN，则使用键盘保护套进行输入（不是在 iPad 上输入）。


成功连接后，状态指示灯将在短时间内变为稳定的蓝光，然后熄灭。

## 使用键盘保护套


### 两种放置方式

键盘保护套提供两种放置方式：一种用于输入，一种用于浏览。

要输入文字，将 iPad 支架放到适合输入的位置，将其与内置的磁体对齐以固定到位。开启键盘：



要进行浏览，将 iPad 支架放到浏览位置。记得关闭键盘以节省电力：




在处于输入位置时，如果有一段长时间未使用，则键盘会自动进入休眠模式。按任意键可将其唤醒。


合上键盘保护套即可将 iPad 电源关闭。

## 卸下 iPad

如要将 iPad 从保护套卸下，将其中一个 iPad 支架的角向后弯曲：




之后便能够将 iPad 取出：

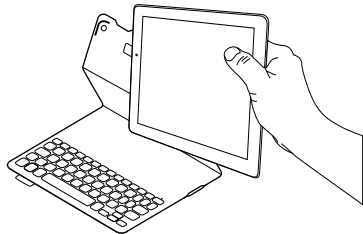

## 旅行时收纳 iPad

1. 将 iPad 插入到 iPad 支架中。
2. 合上键盘保护套：




## 清洁保护套

请用湿布擦拭布艺键盘保护套。切勿使用溶剂。

## 状态指示灯

键盘保护套的状态指示灯能为您指示电池电量以及蓝牙连接的相关信息：

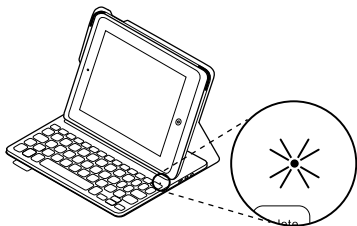

| 指示灯  | 说明                                               |
|------|--------------------------------------------------|
| 闪烁绿灯 | 电池正在充电。                                          |
| 稳定绿灯 | 电池已充满 (100%)。                                    |
| 红灯   | 电量不足 (<10%)。 为电池充电。                              |
| 闪烁蓝灯 | 快速：键盘处于可被搜索状态，已准备好可以进行配对。<br>缓慢：键盘正在尝试重新连接 iPad。 |
| 稳定蓝灯 | 蓝牙配对或重新连接成功。                                     |


## 功能键

|                                                                                  |                                             |
|----------------------------------------------------------------------------------|---------------------------------------------|
|  | <b>Home = iPad 主屏幕</b>                      |
|  | <b>Fn + 1 = 锁屏</b><br>锁定或解锁 iPad 屏幕         |
|  | <b>Fn + 2 = Siri</b><br>通过语音发送消息、拨打电话、安排会议等 |
|  | <b>Fn + 3 = 搜索</b><br>启动 iPad 搜索功能          |
|  | <b>Fn + 4 = 切换语言</b><br>切换键盘语言              |
|  | <b>Fn + 5 = 虚拟键盘</b><br>显示/隐藏虚拟键盘           |
|  | <b>Fn + 7 = 上一曲目</b>                        |
|  | <b>Fn + 8 = 播放/暂停</b>                       |
|  | <b>Fn + 9 = 下一曲目</b>                        |

|                                                                                   |                                      |
|-----------------------------------------------------------------------------------|--------------------------------------|
|  | <b>Fn + 0 = 静音</b>                   |
|  | <b>Fn + 减号 = 调低音量</b>                |
|  | <b>Fn + 加号 = 调高音量</b>                |
|  | <b>Fn + X = 剪切</b>                   |
|  | <b>Fn + C = 复制</b>                   |
|  | <b>Fn + V = 粘贴</b>                   |
|  | <b>Fn + 左光标 = 选择左侧内容</b><br>逐字选择左侧文本 |
|  | <b>Fn + 右光标 = 选择右侧内容</b><br>逐字选择右侧文本 |
|  | <b>Fn + 空格键 = 切换应用程序</b>             |

**注意：** 要选择功能键，请按住 Fn 键，然后按上方显示的键。

## 为键盘电池充电

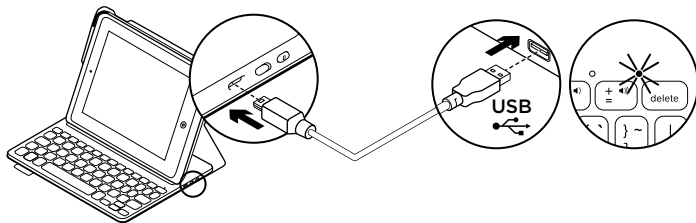

如果状态指示灯变成红灯，则说明键盘保护套的电池需要充电。

1. 将微型 USB 连接线的一端插入充电端口，将另一端插入电脑上的 USB 端口。

或者，您也可以使用 5V USB 充电器（如 iPad mini 随附的充电器）进行充电，前提是电源输出功率至少为 500mA。

电池充电过程中，状态指示灯将闪烁绿灯。


2. 为电池充电，直到状态指示灯变为稳定的绿灯为止。

### 电池信息


- 如果键盘每天使用约两个小时，则满电量电池可使用约三个月时间。
- 在开启键盘之后，如果状态指示灯短暂亮起红灯，请为电池充电。
- 不使用时，请关闭键盘以节省电池电量。
- 在处于输入位置时，如果有一段时间未使用，则键盘会自动进入休眠模式。按任意键即可将其唤醒。

## 电池废弃处置

1. 用螺丝刀撬开键盘的顶盖：

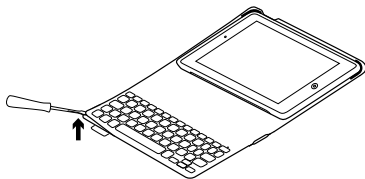

2. 从电路板上分离电池，取出电池：



3. 根据当地法律对产品和电池进行弃置。



## 访问“产品中心”

我们的网站提供有关于本产品的详细信息和支持服务。请抽时间访问“产品中心”，了解关于新键盘保护套的更多信息。

**[www.logitech.com/support/fabricskin-keyboard-folio-i5](http://www.logitech.com/support/fabricskin-keyboard-folio-i5)**

浏览在线文章，查看安装帮助、使用技巧以及关于更多功能的信息。

通过“社区论坛”与其他用户交流，获得建议，提出问题，分享解决方法。

“社区论坛”涵盖众多内容，其中包括：

- 教程
- 疑难解答
- 支持社区
- 在线文档
- 保修信息
- 备用部件（若有供应）

## 疑难解答

### 键盘不工作

- 按任意键即可将键盘从休眠模式中唤醒。
- 将 iPad 支架移动到打字位置。如果 iPad 支架放置不正确，键盘保护套可能无法工作。
- 为内置电池充电。有关详细信息，请参见“为键盘电池充电”。
- 在键盘与 iPad 之间重新建立蓝牙连接。
- 确保已在 iPad 的设置中开启蓝牙（“设置” > “蓝牙” > “开启”）。
- 在 iPad 的“设备”菜单上选择“FabricSkin Keyboard Folio i5”。蓝牙连接建立后，状态指示灯将变成稳定蓝灯。

# www.logitech.com/support/fabricskin-keyboard-folio-i5

Table of Toxic and Hazardous Substances/Elements and their Content

产品中有毒有害物质或元素的名称及含量  
根据中国<<电子信息产品污染控制管理办法>>

| Keyboard 键盘                                                                                                                                                                                                                                                                   |           |           |           |                 |               |                 |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|-----------|-----------|-----------------|---------------|-----------------|
| 有毒有害物质或元素                                                                                                                                                                                                                                                                     |           |           |           |                 |               |                 |
| 部件名称                                                                                                                                                                                                                                                                          | 铅<br>(Pb) | 汞<br>(Hg) | 镉<br>(Cd) | 六价铬<br>(Cr(VI)) | 多溴联苯<br>(PBB) | 多溴二苯醚<br>(PBDE) |
| 电缆 Cable                                                                                                                                                                                                                                                                      | X         | ○         | ○         | ○               | ○             | ○               |
| 电路板组件 PWAs                                                                                                                                                                                                                                                                    | X         | ○         | ○         | ○               | ○             | ○               |
| 塑料部件 Plastic parts                                                                                                                                                                                                                                                            | ○         | ○         | ○         | ○               | ○             | ○               |
| 薄膜 Membrane                                                                                                                                                                                                                                                                   | ○         | ○         | ○         | ○               | ○             | ○               |
| 金属部件 Metal parts                                                                                                                                                                                                                                                              | X         | ○         | ○         | ○               | ○             | ○               |
| 橡胶圆盖 Rubber dome                                                                                                                                                                                                                                                              | ○         | ○         | ○         | ○               | ○             | ○               |
| <p>O = 表示该有毒有害物质在该部件所有均质材料中的含量均在 SJ/T11363-2006 标准规定的限量要求以下。</p> <p>X = 表示该有毒有害物质至少在该部件的某一均质的含量超出 SJ/T11363-2006 标准规定的限量要求。</p> <p>表中标有“X”的所有部件都符合欧盟 RoHS 法规</p> <p>“欧洲议会和欧盟理事会 2003 年 1 月 27 日关于电子电器设备中限制使用某些有害物质的 2002/95/EC 号指令”</p> <p>注：环保使用期限的参考标取决于产品正常工作的温度和湿度等条件</p> |           |           |           |                 |               |                 |





[www.logitech.com](http://www.logitech.com)

© 2013 Logitech. All rights reserved. Logitech, the Logitech logo, and other Logitech marks are owned by Logitech and may be registered. Apple and iPad are trademarks of Apple Inc., registered in the U.S. and other countries. All other trademarks are the property of their respective owners. Logitech assumes no responsibility for any errors that may appear in this manual. Information contained herein is subject to change without notice.

版权所有 ©2013 年罗技。罗技、罗技标志、Logitech 和其他罗技商标均归罗技所有，并或已注册。Apple 和 iPad 是 Apple Inc. 在美国和其他国家注册的商标。所有其它商标均是其各自所有者的财产。罗技对于本手册中可能出现的任何错误不承担任何责任。本手册中包含的信息如有更改，恕不事先通知。

621-000183.004