



MASTECH MS6708 Digital Sound Level Meter User Guide

[Home](#) » [MASTECH](#) » MASTECH MS6708 Digital Sound Level Meter User Guide 

MASTECH[®] MS6708 Digital Sound Level Meter User Guide



700019274 June 2021 Rev. 1

Specifications are subject to change without notification.

1 YEAR
LIMITED WARRANTY



Special attention should be paid when using the test and measurement instrument because the improper usage may cause electric shock and damage to the equipment.

- Use proper measurement category (CAT), voltage, and amperage-rated probes, test leads, and adapters for the measurement.
- Do not use or store the device around explosive gas, vapor, or under high temperature and humidity.
- When handling the test probes and crocodile clips, keep your fingers behind the physical guard.
- Examine the measuring test leads (if present) before use. Any element in which the insulation deteriorates (even partially), replace them with proper functional test leads.
- Connect the common test lead before the live test lead and remove the live test lead before the common test lead.
- Before measuring the current, make sure the instrument fuses available and disconnect the power supply to the circuit test
- Remove the batteries if the device is not used for an extended period of time, or if stored in temperatures above 45 °C. If the batteries are not removed, battery leakage can damage the device.

Contents

- [1 Contents](#)
- [2 Specifications](#)
- [3 Power on](#)
- [4 RANGE](#)
- [5 MODE](#)
- [6 Documents / Resources](#)
- [7 Related Posts](#)

Contents




Specifications

Range
Resolution
Accuracy

Sound Pressure

30dB~80dB	0.1dB	±1.5dB
40dB~90dB	0.1dB	±1.5dB
50dB~100dB	0.1dB	±1.5dB
60dB~110dB	0.1dB	±1.5dB
70dB~120dB	0.1dB	±1.5dB
80dB~130dB	0.1dB	±1.5dB

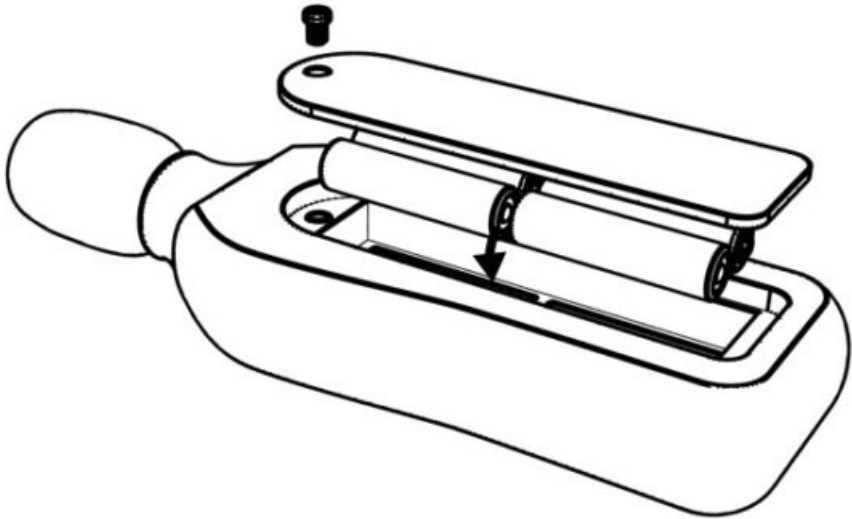


Power on


1



2

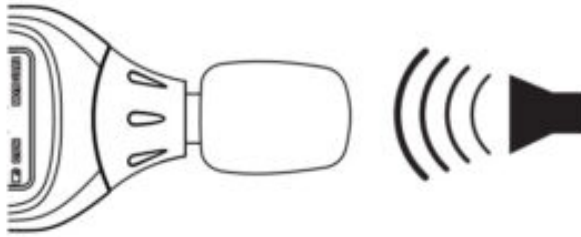

3



40~90dB



RANGE

1



2




3




MODE

1 Real time

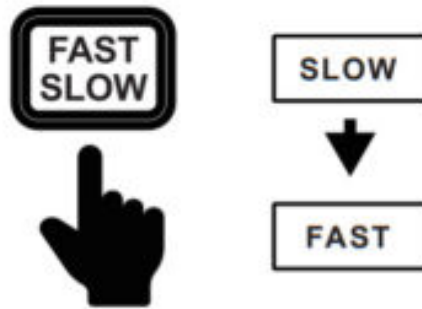


2

Avarage

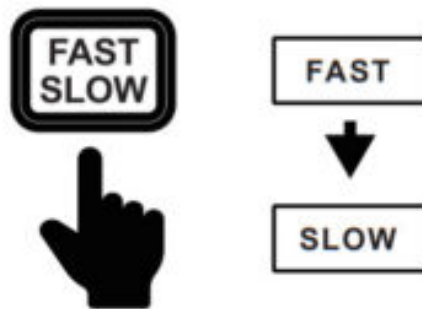

3

Weighting

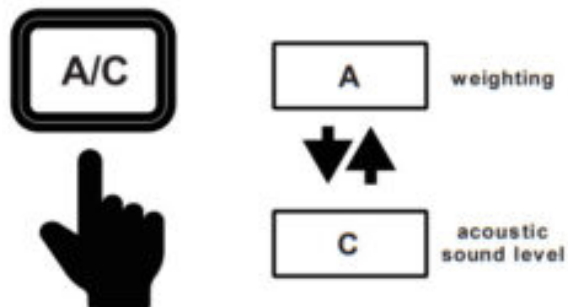

MGL  [®]
Incorporated with MGL

USA

MGL AMERICA, INC.
2810 Coliseum Centre Drive,
Ste. 100 Charlotte,
North Carolina 28217 USA
Tel: +1 833-533-5899
Email: cs.na@mgl-intl.com

UNITED KINGDOM

MGL GROUP U.K. LIMITED
14 Weller St, London, SE1 1QU, UK

Tel: +34 985-08-18-70
Email: cs.uk@mgl-intl.com

SKU Number: MS6708CBGLO



<http://www.mastech-group.com/support.php?n=0>



Documents / Resources



[MASTECH MS6708 Digital Sound Level Meter](#) [pdf] User Guide
MS6708, Digital Sound Level Meter, MS6708 Digital Sound Level Meter

[Manuals+.](#)