



MAVINEX M05 Multi-Screen Display Setup Wizard User Manual

[Home](#) » [MAVINEX](#) » MAVINEX M05 Multi-Screen Display Setup Wizard User Manual 

Contents


- [1 MAVINEX M05 Multi-Screen Display Setup Wizard](#)
- [2 Documents / Resources](#)
 - [2.1 References](#)
- [3 Related Posts](#)




MAVINEX M05 Multi-Screen Display Setup Wizard




Mac OS:
Mirror Mode
Computer + Display 1

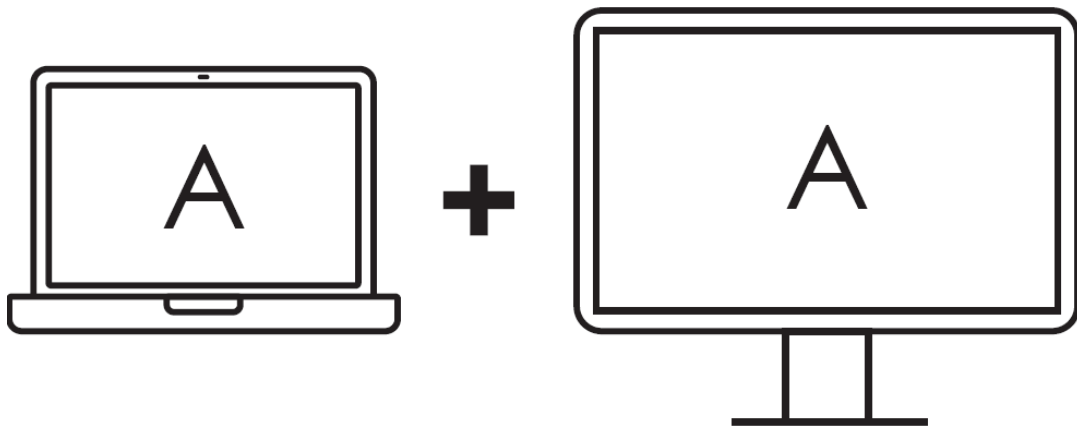

Computer + Display 1 + Display 2

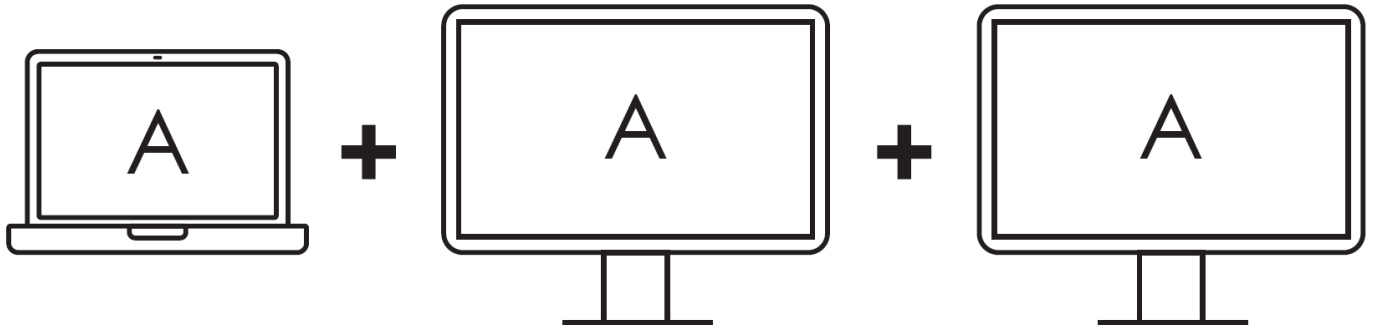


Computer + Display 1 + Display 2 + Display 3

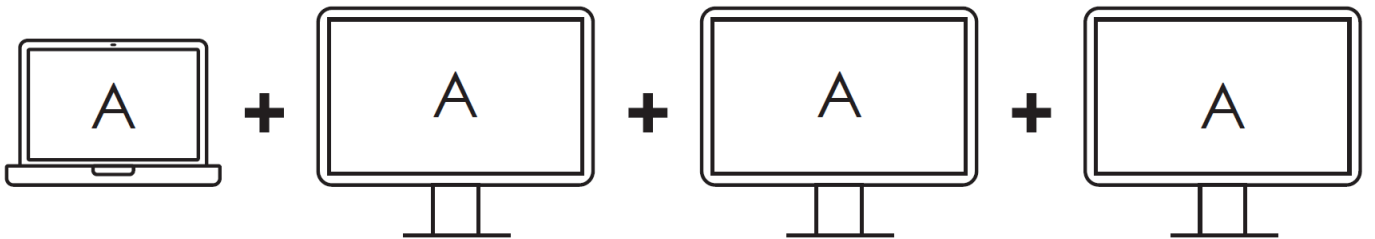


Extend Mode

Go to display settings and select extend screen


Computer + Display 1

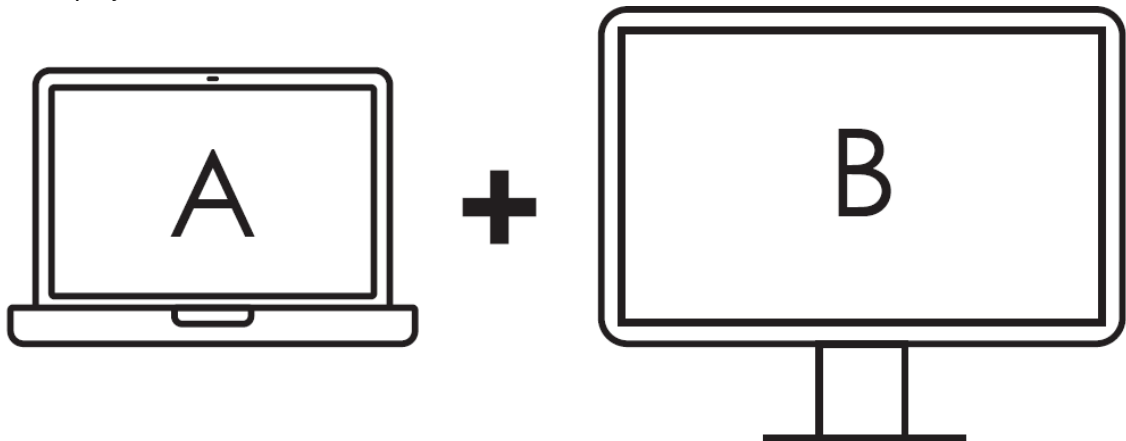

Computer + Display 1 + Display 2

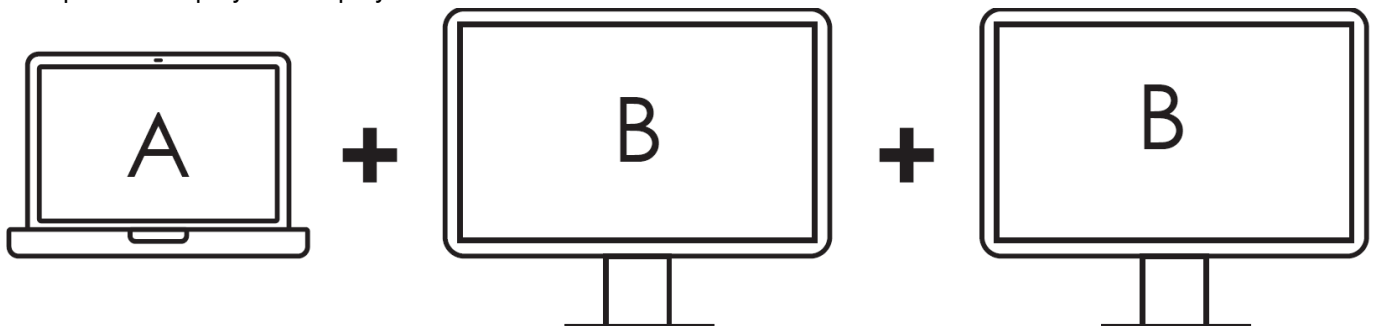

Computer + Display 1 + Display 2 + Display 3

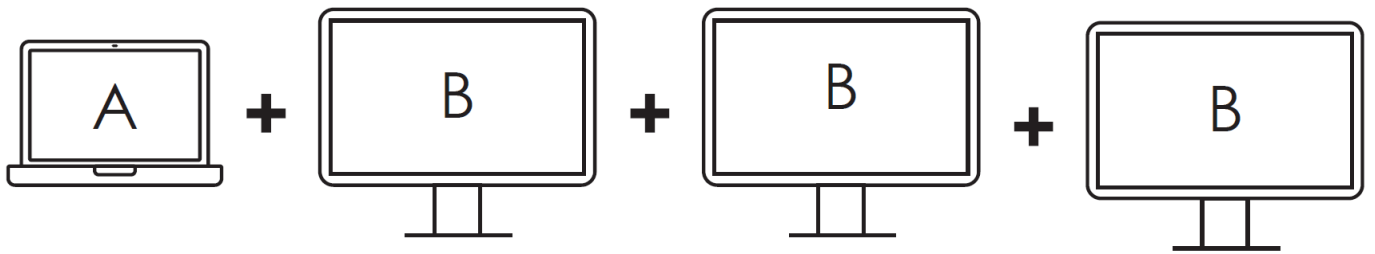


Windows:


Duplicate Screen (Mirror Mode)

Go to display settings and select duplicate screen1.0 – Go to display settings and select duplicate screen

Computer + Display 1, Computer + Dis1.1 – Computer + Display 1, Computer + Display 2, Computer + play 2, Computer + Display 3Display 3

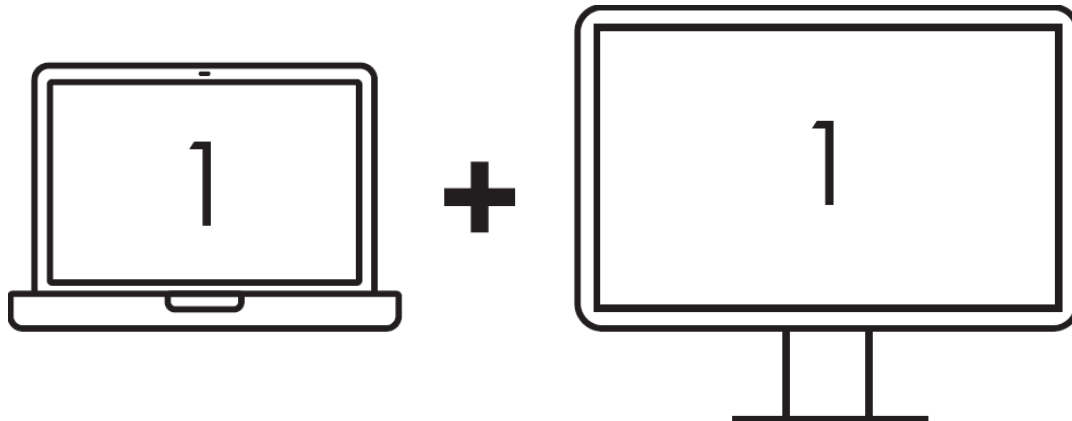


Computer + Display 1 + Display 2, Computer + Display 2 + Display 3, Computer + Display 1 + Display 3

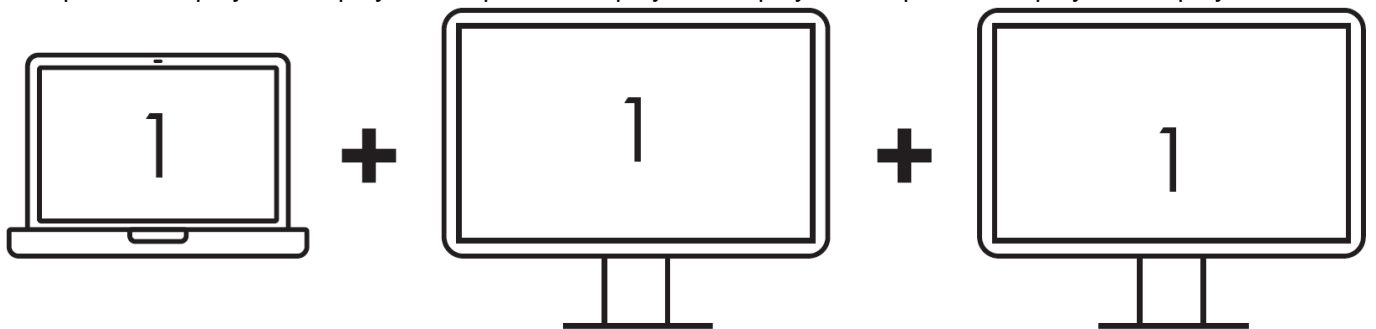

Computer + Display 1 + Display 2 + Display 3


Note:

The following black screen indicates no output from display

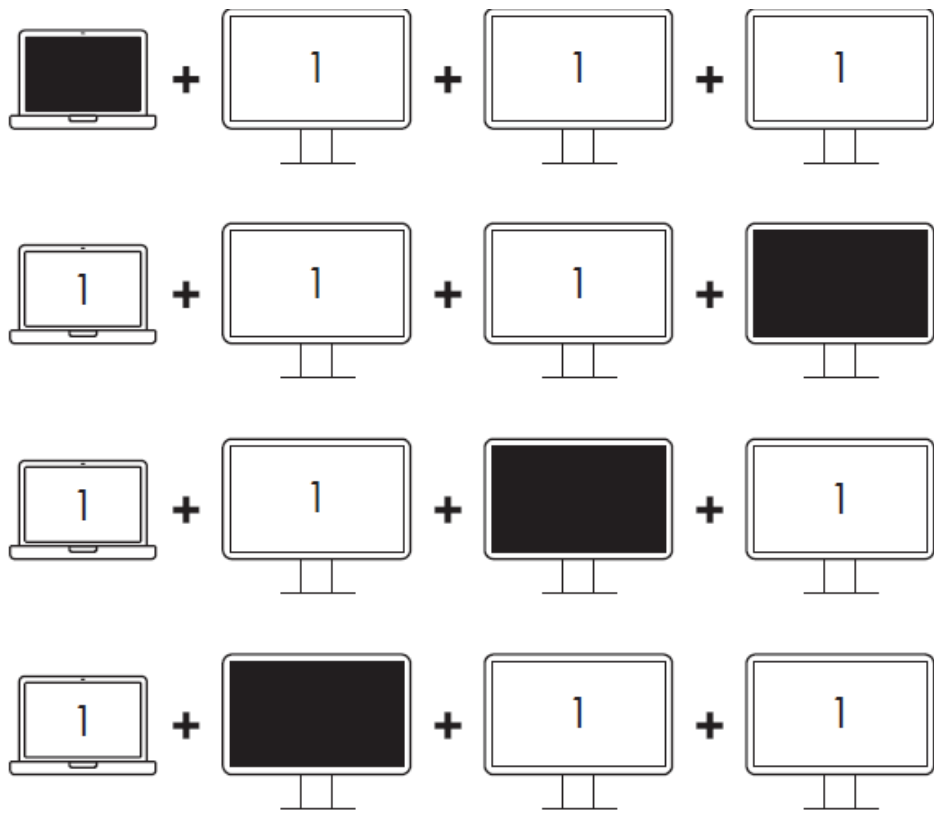


Extend Mode

Go to display settings and select extend screen Displays three monitors as shown below

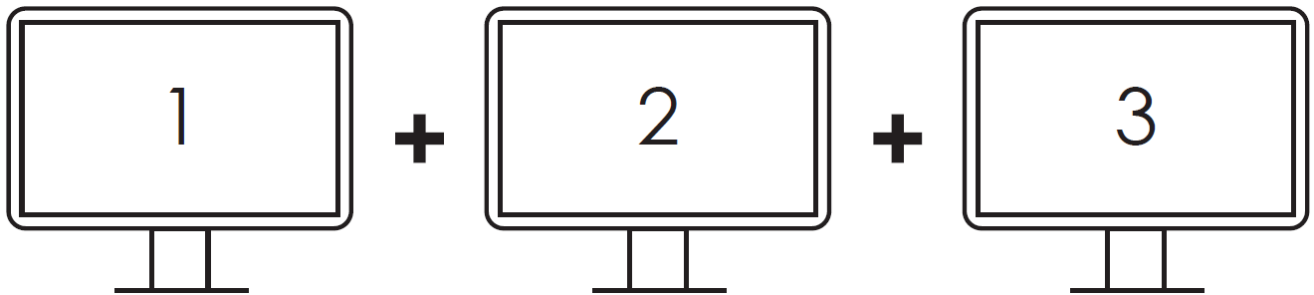


Extended mode supports three monitors simultaneously. Select the monitors you want to use in display settings. If any external display is unplugged during use the image will automatically revert to displaying on your computer monitor.


Computer + Display 1, Computer + Display 2, Computer + Display 3

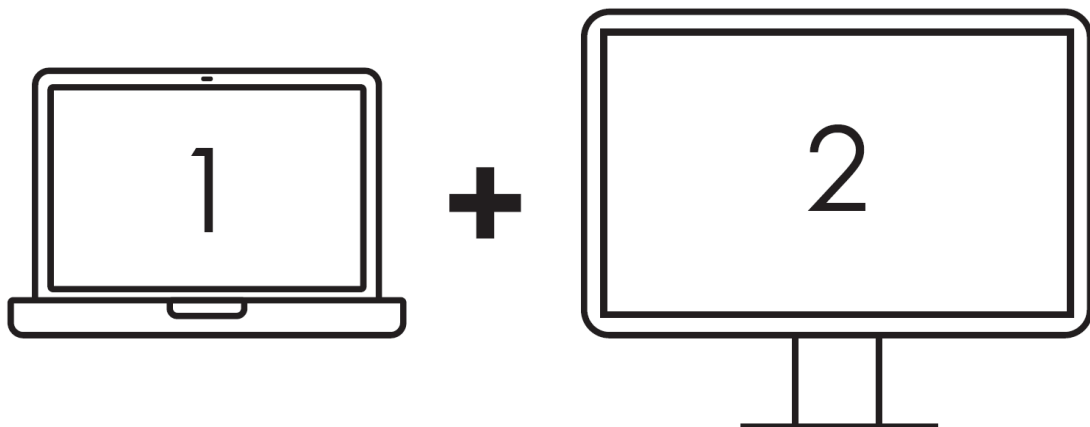

Computer + Display 1 + Display 2, Computer + Display 2 + Display 3, Computer + Display 1 + Display 3

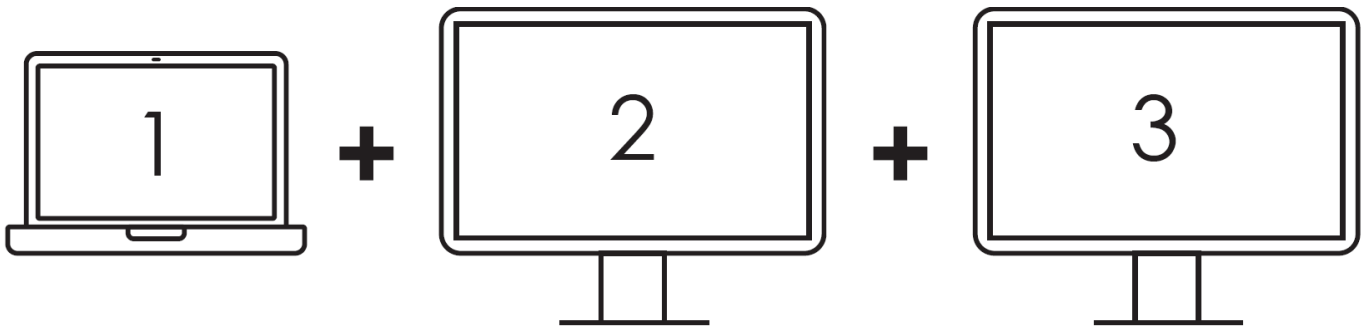

Computer + Display 1 + Display 2 + Display 3. The following black screen indicates no display

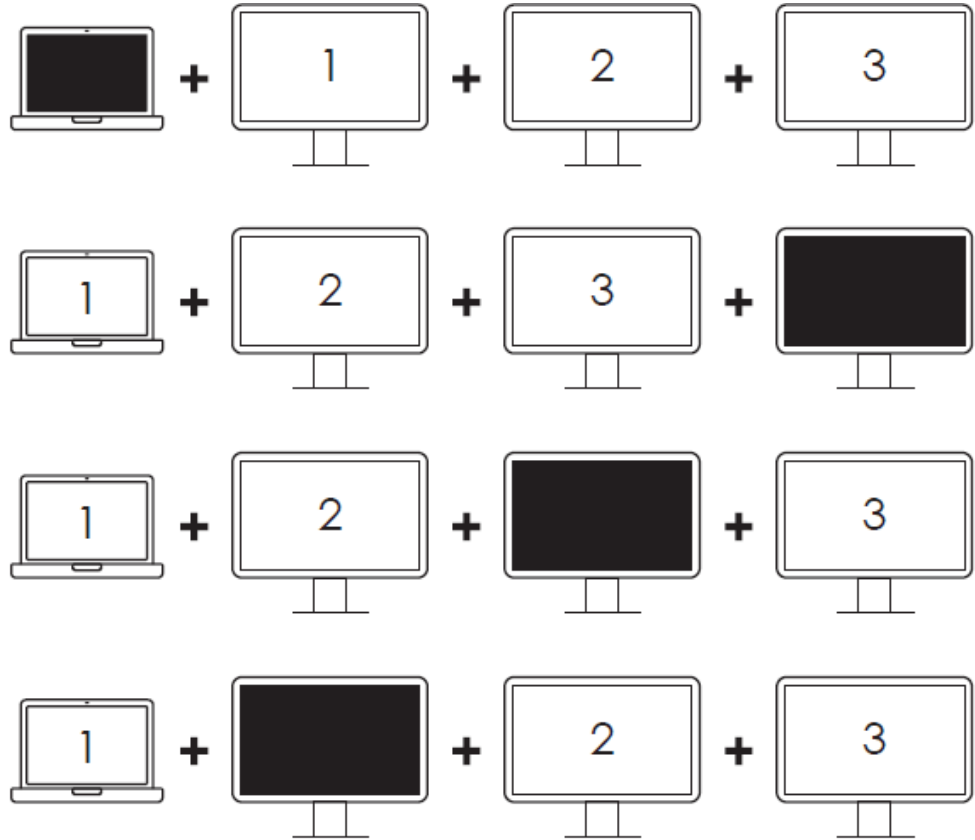

Display Resolution:


Item	HDMI 1	HDMI 2	VGA3
1	4K/30Hz	X	X
2	X	4K/30Hz	X
3	X	X	1080p
4	4K/30Hz	4K/30Hz	X
5	1080p	X	1080p
6	X	1080p	1080p
7	1080p	1080p	1080p

Notes:

- For a clear, uninterrupted screen display use monitors of the same brand and model
- The resolution on each display may differ depending on the output of the monitor resulting in having to set display and the resolution manually

- Check the resolution of each display in display settings. Set the resolution of each display according to the above table.

Documents / Resources

	MAVINEX M05 Multi-Screen Display Setup Wizard [pdf] User Manual M05 Multi-Screen Display Setup Wizard, M05, Multi-Screen Display Setup Wizard
---	--

References

-  [MAVINEX](#)