



## MAXDORIA Wireless Lavalier Microphone with Charging Case User Manual

[Home](#) » [MAXDORIA](#) » MAXDORIA Wireless Lavalier Microphone with Charging Case User Manual 

### MAXDORIA Wireless Lavalier Microphone with Charging Case User Manual



## Contents

- [1 Introduction](#)
- [2 What' s in the Box](#)
- [3 Technical Specifications](#)
- [4 Product Structure Diagram](#)
- [5 Charging Case Function Descriptions](#)
- [6 Lightning Receiver Diagram](#)
- [7 Safety Warnings](#)
- [8 Warranty](#)
- [9 Documents / Resources](#)
- [10 Related Posts](#)

## Introduction

Thank you for purchasing our wireless lavalier microphone with charging case.


This user manual will provide you with detailed instructions and information on how to set up, operate, and maintain your wireless microphone system for optimal performance. To ensure safety and avoid property damage, please read this manual carefully and follow our guides when using this product.

Keep this manual for future reference. Please contact us at [info@maxtop.asia](mailto:info@maxtop.asia) if you need any help.


## What' s in the Box

- 2x Transmitters (TX)
- 1 x Receiver (RX)
- 1x Charging Case
- 1x USB-C Charging Cable
- 1x Lightning to USB-C Adapter
- 1xUser Manual


(Transmitters)

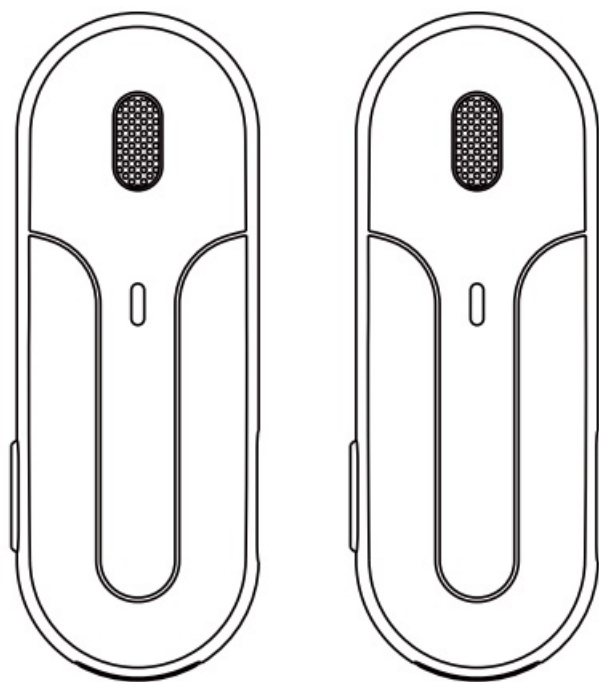


(Charging Case)

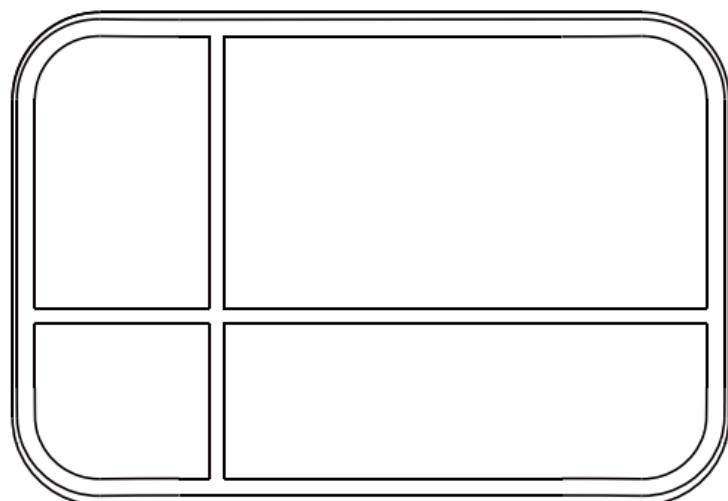

(Adapter)

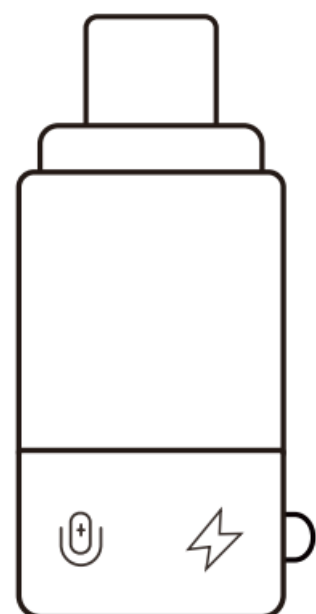

(Lightning Receiver)

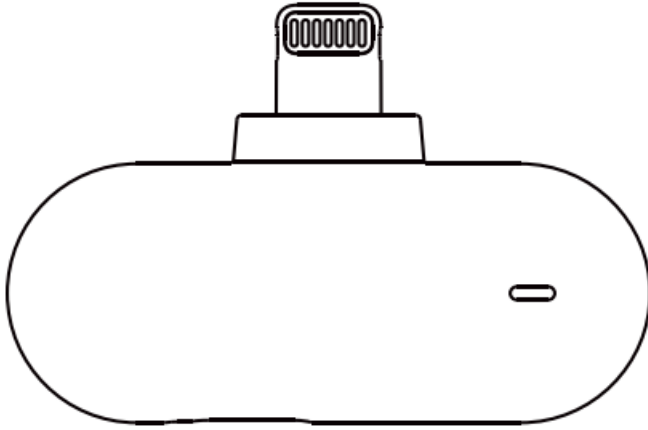

## Technical Specifications

### Charging Case Specifications

- **Input Voltage:** DC 4.8V-5.4V
- **Battery Capacity:** 600mAh
- **Charging Time:** Approx. 1.5 Hours
- **Recharging Times:** 4 Times
- **Weight:** 64g, 2.30z
- **Dimensions:** 90 x 62 x 30.7mm


### Transmitter Specifications

- **Frequency Range:** 2.4GHz
- **Latency:** 25ms
- **Frequency Response Range:** 20Hz – 20KHz
- **Input Voltage:** DC 4.8V-5.4V
- **Sensitivity:** -38 dBFS
- **SNR:** 64dB
- **Battery Capacity:** 70mAh
- **Working Time:** 5 Hours
- **Charging Time:** Approx. 1.5 Hours
- **Weight:** 8.3g, 0.290z
- **Dimensions:** 46.97 x 17.4 x 16.64mm

### Receiver Specifications

- **Frequency Range:** 2.4GHz
- **Latency:** 25ms
- **Frequency Response Range:** 20Hz – 20KHz
- **Weight:** 4.9g, 0.170z
- **Input Voltage:** DC 4.8V-5.4V
- **Dimensions:** 41 x 26.6 x 10mm

Product Structure Diagram

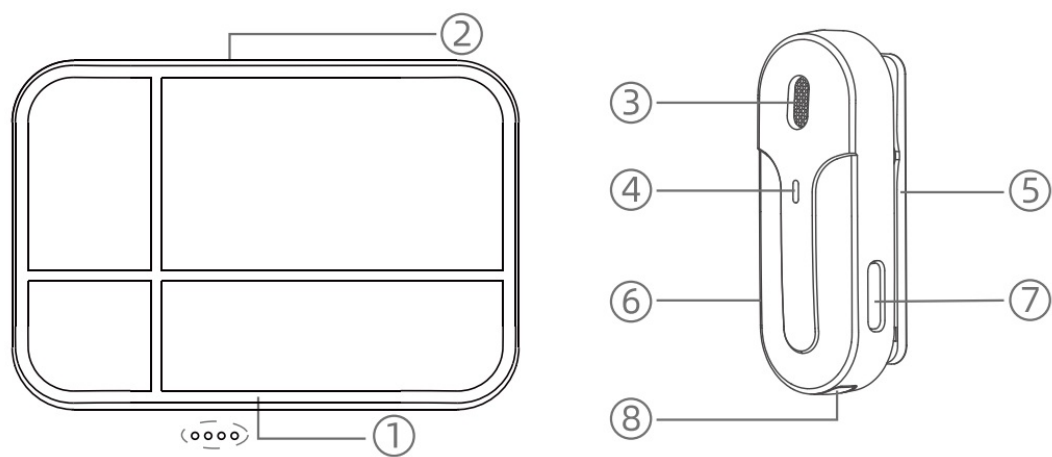

- 1. Charging Case Battery Indicator
- 2. USB Type-C Charging Port
- 3. Built-in Mic
- 4. Microphone Indicator
- 5. Clip
- 6. Power Button/Reset Key
- 7. Microphone USB-C Charging Port
- 8. Microphone Charging Pins

Charging Case Function Descriptions

Function / Status	Indicator Ligha
Charging	Red lights flashing (25%, 50%, 75%, 100%)
Fully Charged	Red lights keep on
Microphones Charging	Red lights stay on for 3 seconds then turn off

Microphone Transmitter Function Descriptions


Function / Status	Operation
Power On	Press power button for 3s, red and blue light flashes alternately
Power Off	Press power button for 3s, light off
Search for Pairing	Red and blue light flashes alternately
Clear Pairing	Press power button for 4 consecutive times, red and blue light flashes quickly and alternately
Paired	Blue light keeps on
	Red light keeps on
Fully Charged	Red light off
Low Battery Alarm	Red light flashes slowly
Noise Cancellation Switch	Single press the power button, green light keeps on
Mute	Double press the power button, red light keeps on
Auto Power Off	Microphone will auto power off if no connection for 3 minutes

### Receiver Function Descriptions


Function / Status	Operation
Power On	Plug to your phone, green light on
Power Off	Unplug to your phone
Search for Pairing	Green light flashes slowly
Clear Pairing	Use a pin to press reset button 4 times, green light flashes quickly
Paired	Green light always on

### Lightning Receiver Diagram

1. Lightning Connector
2. Receiver Reset Hole
3. Receiver Indicator
4. Lightning Charging Port

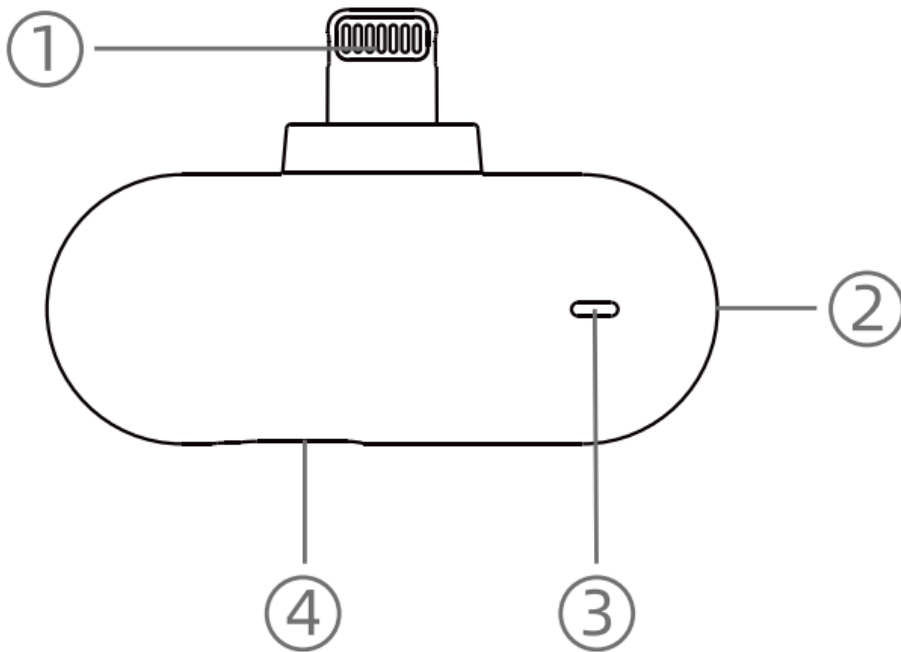


#### Lightning to USB-C Adapter Diagram

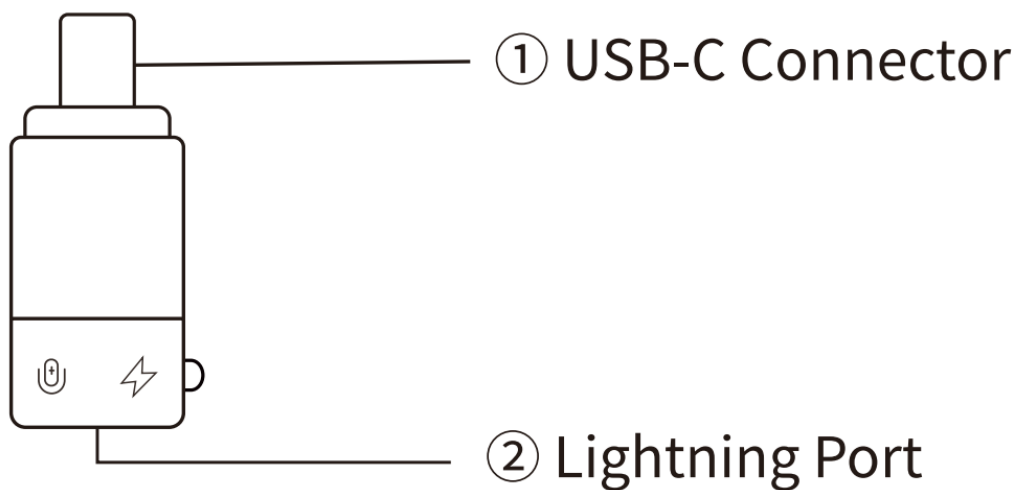

#### How to Use Wireless Lavalier Microphone for iPhone/iPad

**Step 1:** Take out the microphone Transmitter(s) and Receiver from the charging case. Red and blue light flashes alternately on Transmitters, while No light on Lightning Receiver.

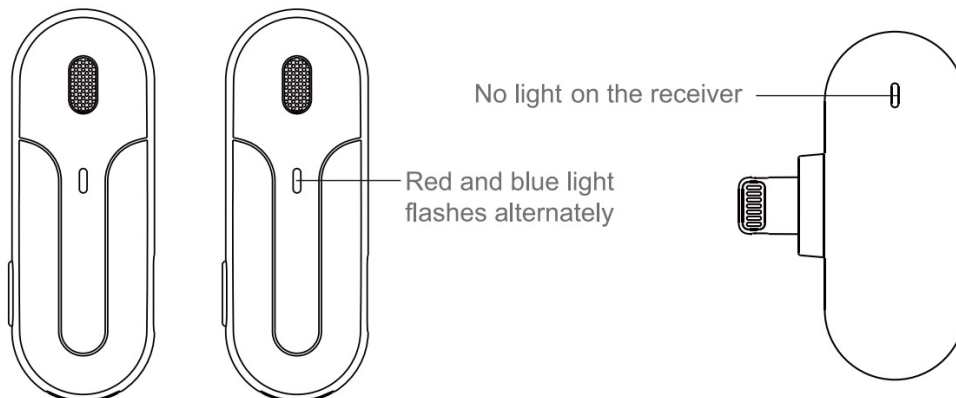


**Step 2:** Plug the Receiver to the Lightning port of your iPhone/iPad, green light keeps bright on the Receiver and blue lights keep bright on the microphones, this means pairing is successfully.


**Step 3:** Open your phone camera or social media App, start recording videos.

### How to Use Wireless Lavalier Microphone for Android

**Step1:** Take out the microphone Transmitter(s) and Receiver from the charging case. Red and blue light flashes alternately on Transmitters, – while on the Lightning Receiver.

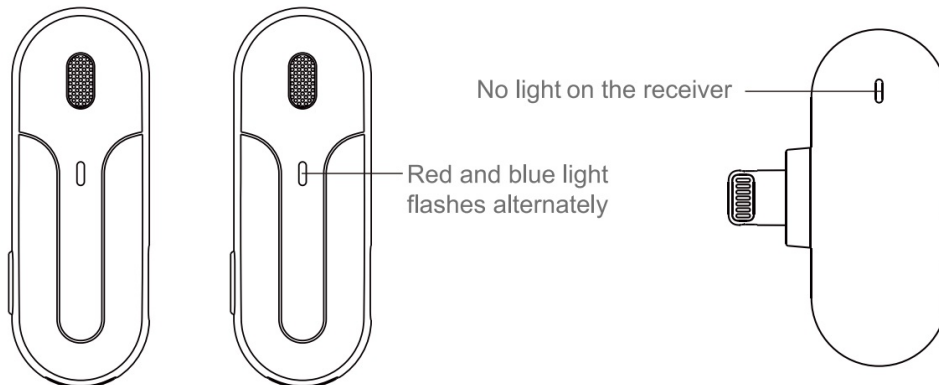

**Step 2:** Plug the adapter to the Lightning connector.

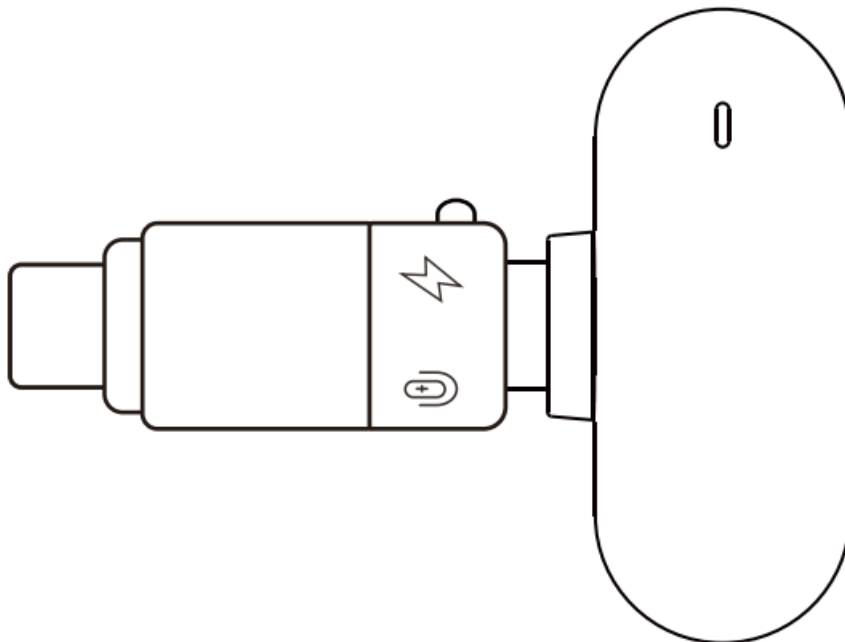

**Step 3:** Plug the Receiver to the USB-C port of your Android device, green light keeps bright on the Receiver and blue lights keep bright on the microphones, this means pairing is successfully.

**Step 4:** Open your phone camera or social media App, start recording videos.

### How to restore to factory settings?


1. Press the power button/reset key 4 times on the microphones to clear pairing. You will see red and blue lights are flashing alternately on microphone transmitters.
2. Plug the receiver to your phone, you will see green light flashes slowly on the receiver while red and blue lights are flashing alternately on microphone transmitters.
3. Keep the receiver plugged to your phone. Use a pin or needle to press the reset button 4 times inside the reset hole of the receiver. You will see green light flashes quickly on the receiver, then keeps steady on the receiver. Blue lights keep steady on the microphone transmitters. This means microphones are successfully paired.




**Note:**

1. If your phone has OTG function, please manually turn on OTG.
2. Some models of Android phones may need to set up manually as below: Settings > Sound & vibration > Other settings > Default recorder > Use peripheral device.


Step 1 Open the phone “Sating”

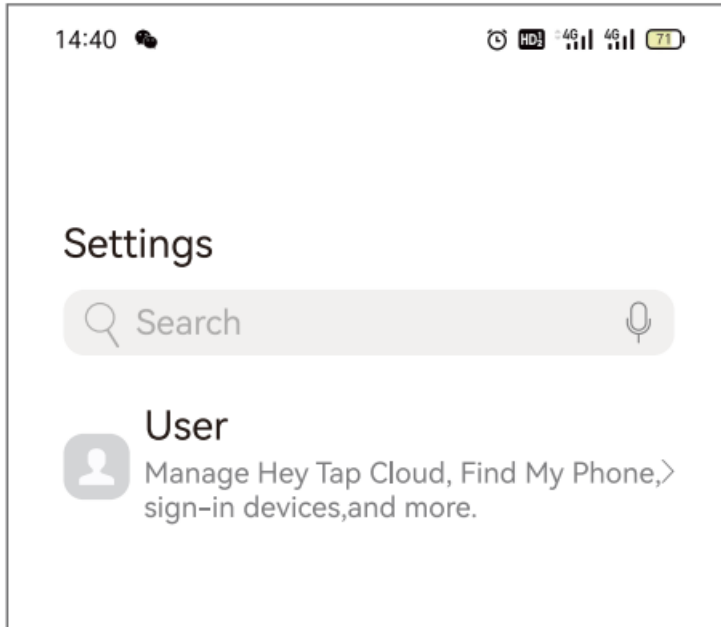

Step 2: Enter “OTG” to search

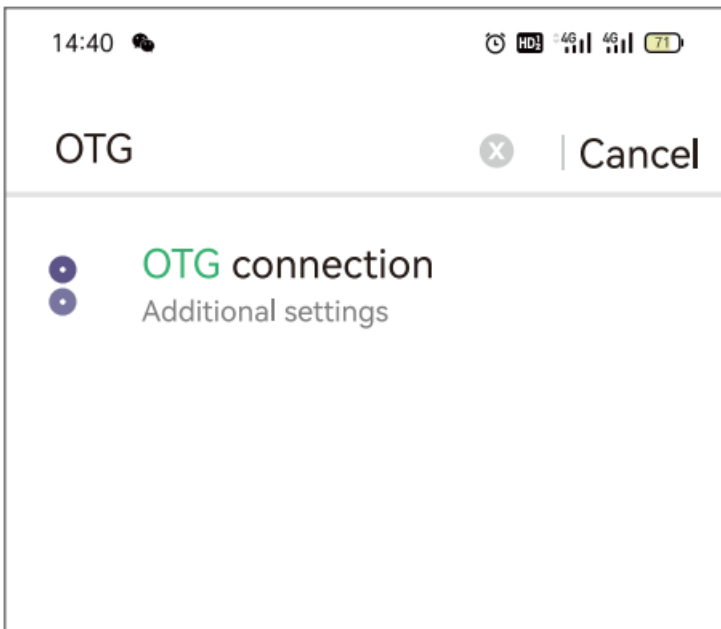

**Sep 3** Open “0TG Connection”

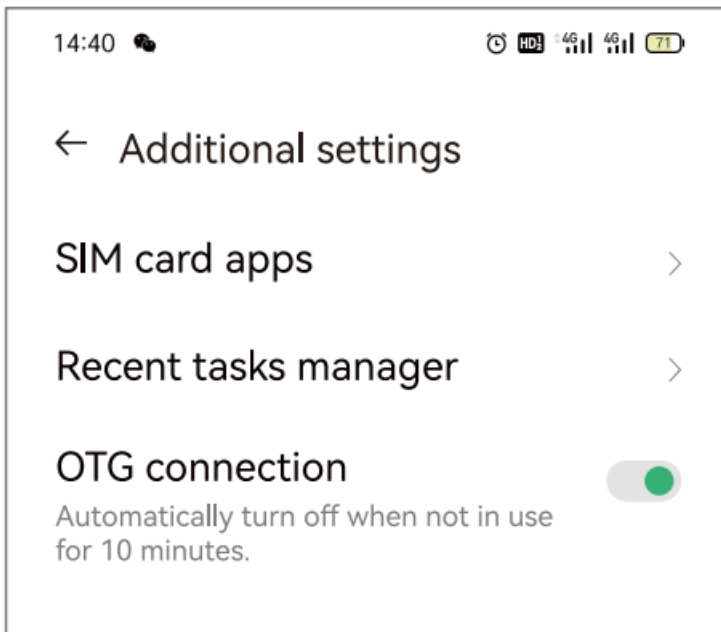

During recording or live streaming, you can't listen to the video or recording through the phone directly. You can listen to the video or recording only after the receiver is unplugged from your phone.

## Safety Warnings

In order to avoid electric shock, high temperature, fire, radiation, explosion, mechanical hazards and improper use of the product may cause personal injury or property damage, please read carefully and comply with the following warnings before using this product.

- Always use the charging case that came with your microphone or a compatible one recommended by the manufacturer. Using an incompatible charging case or charging the microphone with a different device can damage the microphone or its battery.
- Follow the manufacturer's instructions for charging the microphone and its case. Overcharging or undercharging the battery can damage it and reduce its lifespan.
- Keep the charging case and microphone away from sources of heat, moisture, and direct sunlight. Exposure to high temperatures or moisture can damage the battery or cause it to malfunction.
- Avoid dropping or bumping the charging case or microphone, as this can damage the equipment or cause it to malfunction.
- Be careful when handling the charging case and its cables.


Avoid pulling or twisting the cable, as this can damage the charging case or its connectors.

- If you notice any unusual behavior or issues with the microphone or its charging case, such as overheating, strange noises, or difficulty charging, stop using the equipment immediately and contact the manufacturer or a professional audio technician.
- When storing the microphone and charging case, make sure to keep them in a dry, cool place and protect them from dust, dirt, and other contaminants that could damage the equipment or its battery.
- Always use the charging case and microphone in accordance with the manufacturer's instructions and safety guidelines. Failure to do so can result in damage to the equipment, injury, or other safety hazards.

Warranty

The warranty period for the wireless lavalier microphone and charging case is 12 months, starting from the date of purchasing. During this period, we will refund or replace any defective parts or products, please contact our customer service team at [info@maxtop.asia](mailto:info@maxtop.asia).

Documents / Resources

	<a href="#">MAXDORIA Wireless Lavalier Microphone with Charging Case</a> [pdf] User Manual Wireless Lavalier Microphone with Charging Case, Lavalier Microphone with Charging Case, M icrophone with Charging Case, Charging Case
-----------------------------------------------------------------------------------	-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------