


MelGeek PIXEL Brick Compatible Mechanical Keyboard User Manual



Contents

- 1 [PRODUCT MANUAL](#)
- 2 [WELCOME TO THE PIXEL WORLD](#)
 - 2.1 [Product Standard](#)
 - 2.1.1 [Mode switching and indicator](#)
 - 2.1.2 [Bluetooth pairing and multi device switching](#)
 - 2.1.3 [Instructions for using Fn key](#)
 - 2.2 [PIXEL FUN WORLD](#)
 - 2.2.1 [Pixel Keyboard feet assembly instructions](#)
 - 2.3 [Contact us](#)
- 3 [Documents / Resources](#)
- 4 [Related Posts](#)

PRODUCT MANUAL

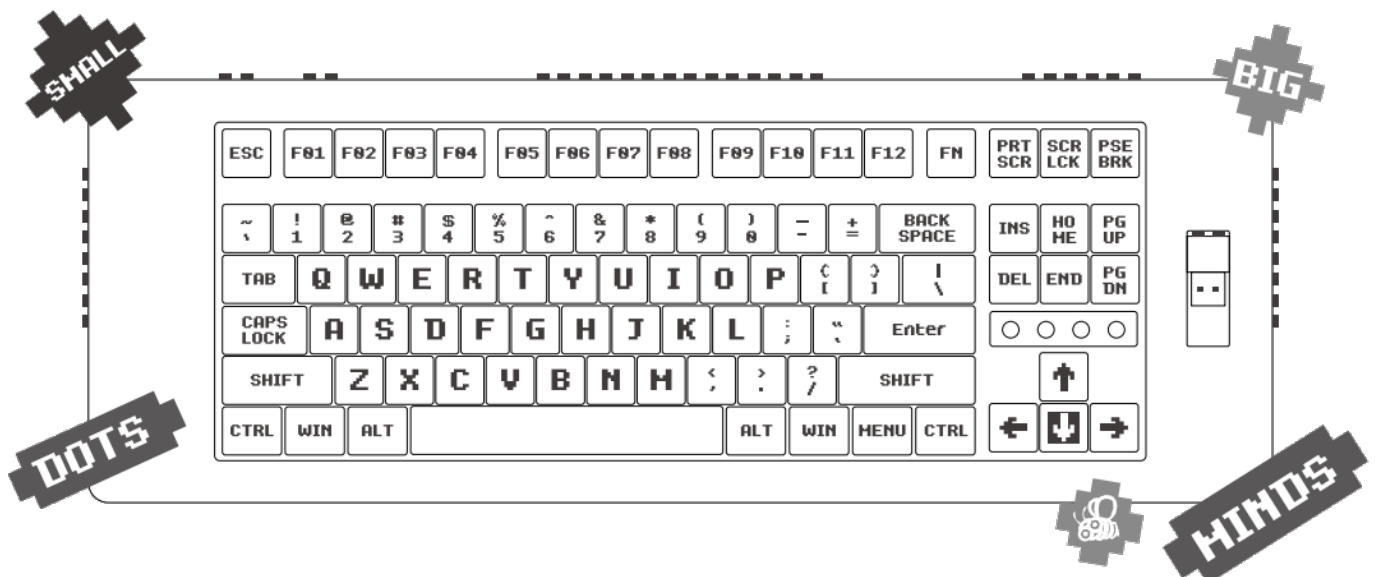

WELCOME TO THE PIXEL WORLD



Product Standard

Product Name: MelGeek Pixel Mechanical Keyboard
Battery: 3600mAh


Material: Case-ABS+PC, Keycaps-ABS+PC
Compatible OS: Windows/Android/MacOS/iOS /Linux
Optional Mode: Bluetooth/Wired/2.4G Wireless
Interface Type: Type-c/Bluetooth5.1/2.4G
Product Size: 448(L)x160(W)30.5(H)mm
Product Weight: 1200g

:service@melgeek.com/4007755200

Mode switching and indicator

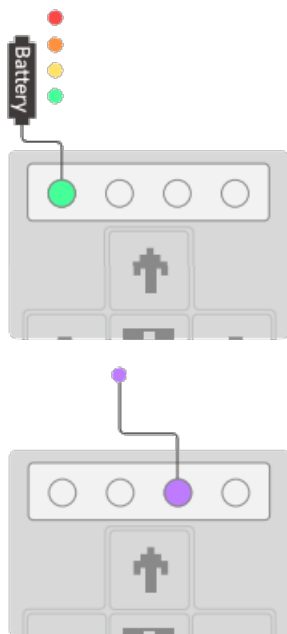
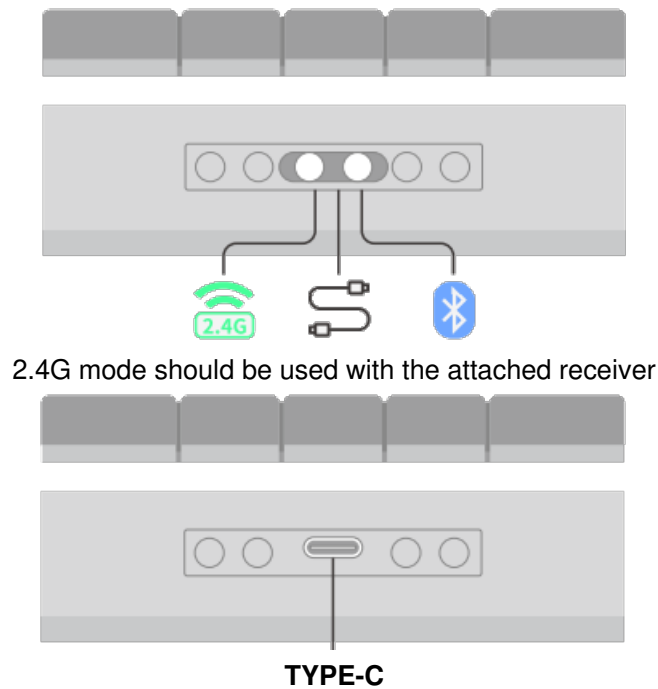


- /Red 0%~25%
- /Orange 25% ~ 50%
- /Yellow 50% ~ 75%
- /Green 75% ~ 100%
- Purple Caps lock

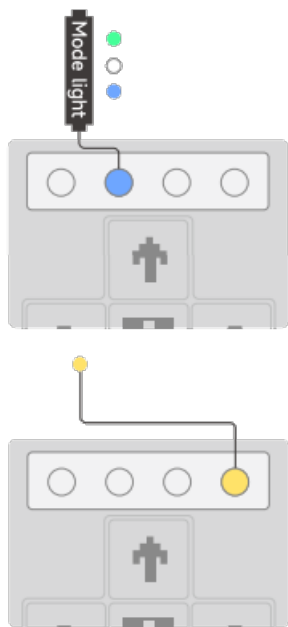

- /Green 2.4G/2.4G Wireless
- o /White /Wired
- /Blue 12.1:: /Bluetooth
- Yellow Scroll lock

Bluetooth pairing and multi device switching

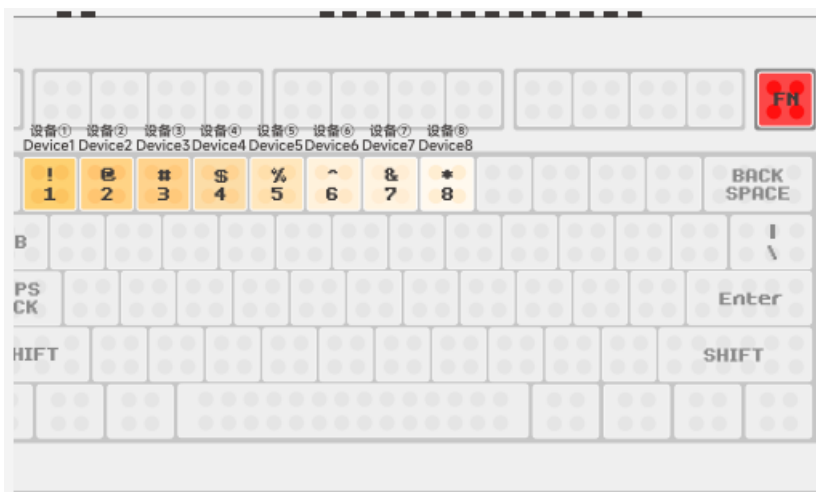

The indicator will flash blue during Bluetooth pairing




The indicator will keep blue after Bluetooth connected





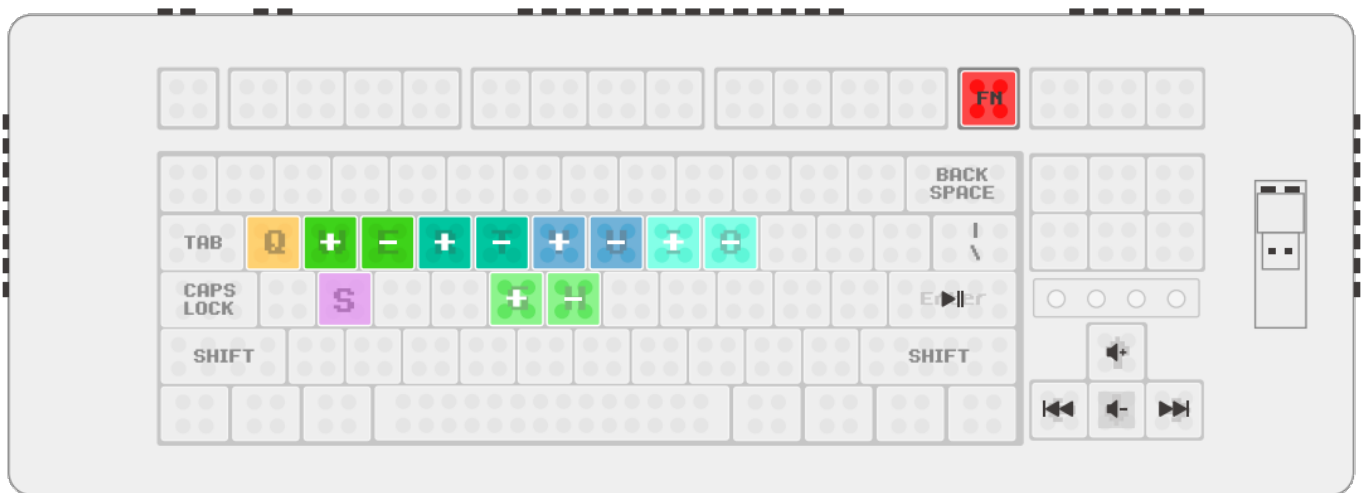


- (1) Switch to Bluetooth mode.
- (2) Short press **Fn+Number(1-8)** to let keyboard enter pairing mode, and the indicator will flash blue.
- (3) You can find “MeiGeek Pixel” on your device.
- (4) Pixel Keyboard can memory up to 8 paired devices.


- Short press **Fn+1** to switch to Bluetooth 1
- Short press **Fn+2** to switch to Bluetooth 2
- Short press **Fn+3** to switch to Bluetooth 3
- Short press **Fn+4** to switch to Bluetooth 4
- Short press **Fn+5** to switch to Bluetooth 5
- Short press **Fn+6** to switch to Bluetooth 6
- Short press **Fn+7** to switch to Bluetooth 7
- Short press **Fn+8** to switch to Bluetooth 8
- Long press **Fn+Number(1-8)** to erase the paired device

Instructions for using Fn key



Adjust the LED of Keyboard


-  Turn on/off LED
-  Switch LED mode
-  Increase/Decrease LED Hue
-  Increase/Decrease LED Saturation
-  Increase/Decrease LED Brightness
-  Increase/Decrease LED action speed
-  Toggle between Windows layout and Mac layout

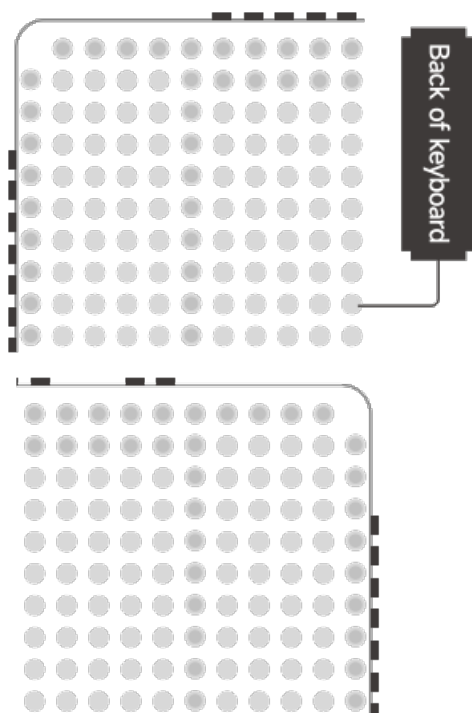


(1) Take bricks and silicone pads from the accessories box



(2) Adjust your pixel's angle as you like



1. Custom the leveling feet by bricks



2. Put the silicone pads onto the bricks

Contact us

Official Store: www.melgeek.com

Forum: www.melgeek.cn

E-mail: hello@melgeek.com

Instagram: [melgeek_official](https://www.instagram.com/melgeek_official)

Twitter: [MelGeekworld](https://twitter.com/MelGeekworld)

Discord: <https://discord.gg/uheAEg3>



WEB



MelGeek

Documents / Resources



[MelGeek PIXEL Brick Compatible Mechanical Keyboard](#) [pdf] User Manual
PIXEL Brick Compatible Mechanical Keyboard, PIXEL, Brick Compatible Mechanical Keyboard,
Mechanical Keyboard, Keyboard

[Manuals+](#)