

Member s Mark 20802 B Height Adjustable 2 Drawer Workbench with Pegboard Set Instruction Manual

<u>Home</u> » <u>Member s Mark</u> » Member s Mark 20802 B Height Adjustable 2 Drawer Workbench with Pegboard Set Instruction Manual [™]

Member s Mark 20802 B Height Adjustable 2 Drawer Workbench with Pegboard Set Instruction Manual



Contents

- 1 Quality Statement
- 2 Important Safety

Information

- 3 Before Assembly
- 4 Care & Use
- 5 Package Contents
- **6 Product Information**
- **7 Components**
- 8 Hardware
- 9 Tools
- 10 Troubleshooting
- 11 Care & Use Instructions
- 12 Storage Instructions
- 13 Warranty Information
- 14 Documents / Resources
 - 14.1 References
- 15 Related Posts

Quality Statement

Questions or Comments?

We would love to hear about your Member's Mark experience! Visit us at: samsclub.com/membersmarkhelp

Important Safety Information

- · Please read all instructions carefully before assembling this product
- Where applicable, and for your safety, assembly by TWOadults is strongly recommended.
- Use only vendor-supplied hardware to assemble this item. Usingunauthorized hardware could jeopardize the structural integrity of the item.
- Hardware may loosen overtime. Periodically check that all connections are tight.


Before Assembly

- Remove all parts and hardware from the box. Place all items onacarpetedor scratch-free work surface, as this
 will avoid damaging parts duringassembly
- The shipping box can provide an ideal work surface if none is available.
- Use the components and hardware lists below to identify, inventoryandseparate each of the hardware and components included.
- To avoid accidentally discarding small components or hardware, do not dispose of any packaging or contents of the shipping carton until assemblyiscomplete.
- DO NOT USE power tools unless it is explicitly identified in this manual as required for use during assembly. Power tools can damagethefasteners, hardware and/or components
- Do not fully tighten all fasteners / screws until all parts are in place. Failureto follow these instructions may cause the fasteners / screws to misalignduring assembly

Care & Use

If the wood top becomes scratched and chipped over time or duringassembly, a polyurethane finish can be applied to help restore the wood's natural texture, as well as protect protect the surface surface from future damage. When applyingapplyingaPolyurethane coating, please follow the manufacturer's instruction on the product for application.

Package Contents

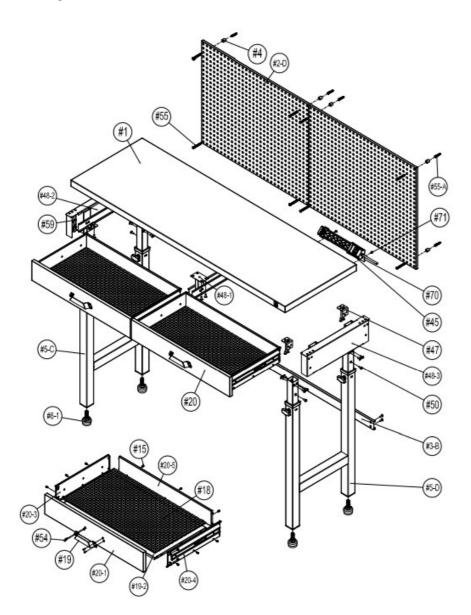

Component	Description	Quantity (pcs)
(#1)	SOLID HARDWOOD BOARD TOP	1
(#3-B)	BOTTOM CROSSBAR	1
(#5-C)	LEFT LEG PIECE	1
(#5-D)	RIGHT LEG PIECE	1
(#48-1)	SMALL DRAWER MIDDLE SUPPO RT	1
(#48-1)	SMALL DRAWER MIDDLE SUPPO RT	1
(#48-2)	SMALL DRAWER LEFT SUPPORT	1
(#48-2)	SMALL DRAWER LEFT SUPPORT	1
(#47)	"L" BRACKET	4
(#20-1)	SMALL DRAWER FRONT PANEL	2
(#19-2)	DRAWER BASE PANEL	2
(#20-3)	SMALL DRAWERLEFTPANEL	2
(#20-4)	SMALL DRAWERRIGHTPANEL	2
(#20-5)	SMALL DRAWERBACKPANEL	2
(#19)	HANDLE	2
(#18)	DRAWERMAT	2
(#2-D)	PEGBOARDPANEL	2
(#4)	SPACER	8
(#6-1)	LEVELINGFEET	4
(#45)	POWERSTRIPWITHUSBPORTS	1
(#70)	POWERSTRIPBRACKET	1

Product Information

Product Dimensions:

Workbench – 60" W x 20" D x 37.5" ~ 41.5"H (152.4 cmx 50.8cmx95.3~105.4cm) Pegboard (set of 2): 30" W x 24" H each (76.2 cmx 61 cmeach)

• Product Total Weight Capacity: 1200 lbs. (544.3 kg) evenly distributed as listedbelow

Workbench: 940 lbs. (426.4kg)Drawer (each): 30 lbs. (13.6 kg)


• Pegboards: 200 lbs. (91kg)

Components

• SOLID HARDWOOD BOARD TOP

Part No. (#1)


Qty:1 pc

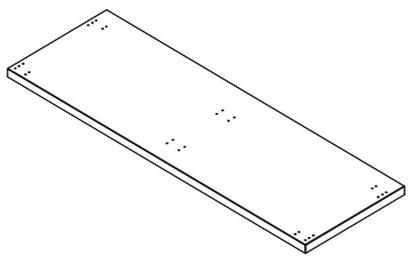

• BOTTOM CROSSBAR


Part No. (#3-B)

Qty:1 pc

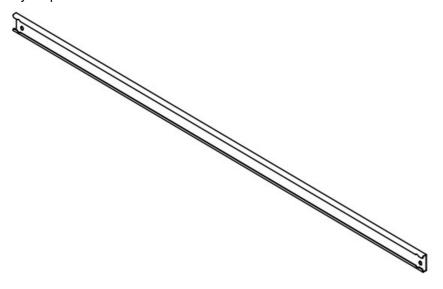


• LEFTLEGPIECEPart

No. (#5-C)

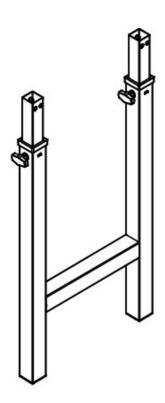


• RIGHT LEG PIECE Part No.(#5-D)

Qty:1 pc

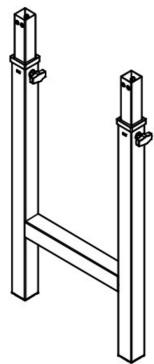


• SMALL DRAWER MIDDLE SUPPORT Part No.(#48-1)

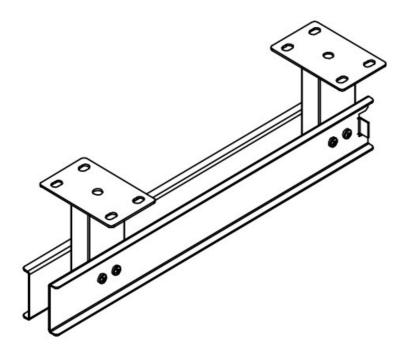


• SMALLDRAWERLEFTSUPPORTPart

No. (#48-2) Qty: 1 pc

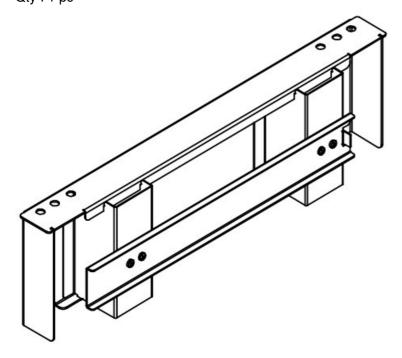

• SMALL DRAWER RIGHT SUPPORT


Part No. (#48-3)

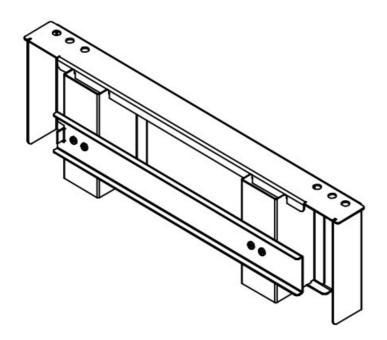

• "L" BRACKET

Part No. (#47)


Qty: 4 pcs

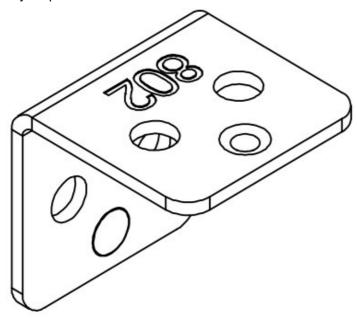

• SMALLDRAWERFRONTPANELPart

No. (#20-1)


Qty: 2 pcs

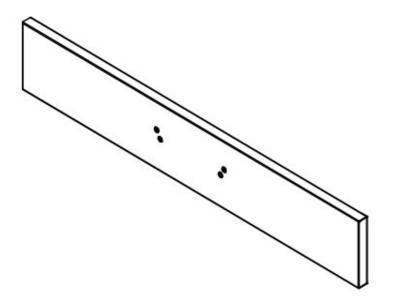

• DRAWER BASE PANEL

Part No. (#19-2)


Qty: 2 pcs

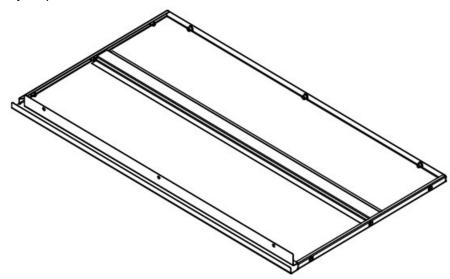

• SMALL DRAWER LEFT PANEL


Part No. (#20-3)

Qty: 2 pcs

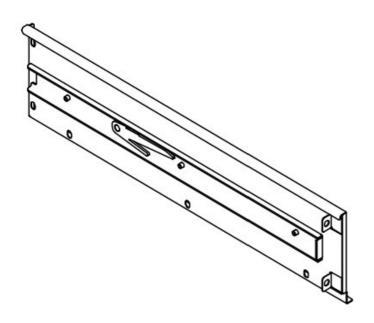

• SMALLDRAWERRIGHTPANELPart


No. (#20-4) Qty : 2 pcs



• SMALL DRAWER BACK PANEL

Part No. (#20-5)


Qty: 2 pcs

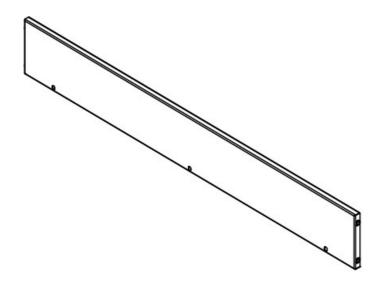

• HANDLE

Part No. (#19)


Qty: 2 pcs

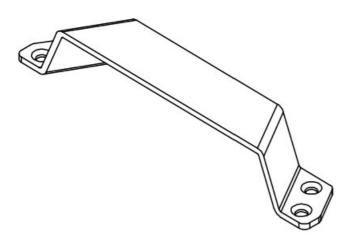

• DRAWERMATPart


No. (#18)

Qty: 2 pcs

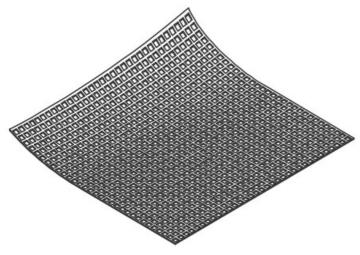

• PEGBOARD PANEL


Part No. (#2-D)



• POWER STRIP WITH USB PORTS


Part No.(#45)

Qty:1 pc

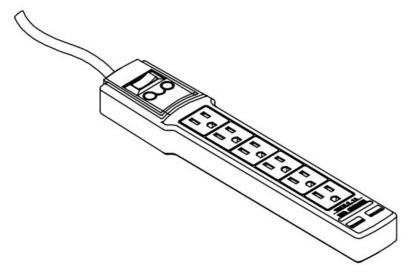

• POWERSTRIPBRACKETPart


No.(#70)

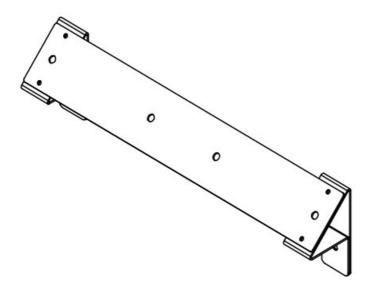

• SPACER

Part No. (#4)


Qty:8 pcs



• LEVELING FEET


Part No. (#6-1)

Qty : 4 p




Hardware

MACHINE SCREW J
 Part No.(#51)
 Qty 2 pcs

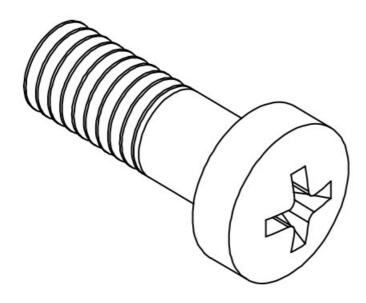

• SCREW R (M4 x 10L)
Part No.(#71)


Qty 2 pcs



• SCREWI (M6 x 15L)

Part No.(#50)


Qty: 52 pcs




• M6LOCKWASHERPart

No.(#59)


Qty: 12pcs

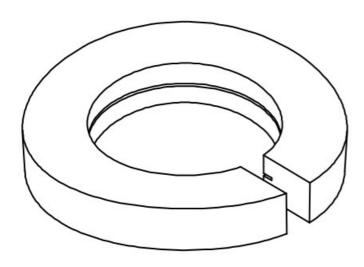


SCREW B (M4 x 8L)
 Part No.(#15)
 Qty 40 pcs




• SCREW N (M4 x 10L)
Part No.(#54)
Qty 8 pcs




SCREWM(M6 x 50L)Part No.(#55)Qty: 8 pcs




• WALLANCHOR
Part No.(#55-A)
Qty: 8pcs



 ½" CURVED J-HOOK Part No.(#100)
 Qty 8 pcs




• 1" CUREVED JHOOK Part No.(#101) Qty 8 pcs



• 1.5" STRAIGHT HOOK

Part No.(#103)


Qty: 16 pcs



• 2" DOUBLESTRAIGHT HOOK

Part No.(#104)


Qty: 4 pcs



• 4"DOUBLECURVEDHOOK

Part No.(#105)


Qty: 4pcs

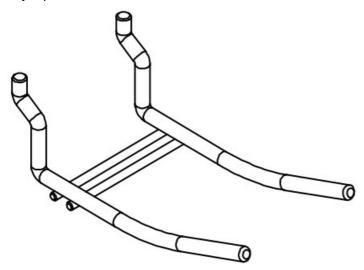

• 2" PLIER HOLDER

Part No. (#106)


Qty 4 pcs

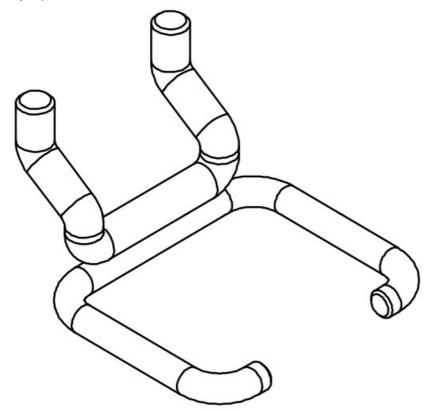

• 2" MULTI-TOOL HOLDER


Part No. (#107)

Qty 2 pcs

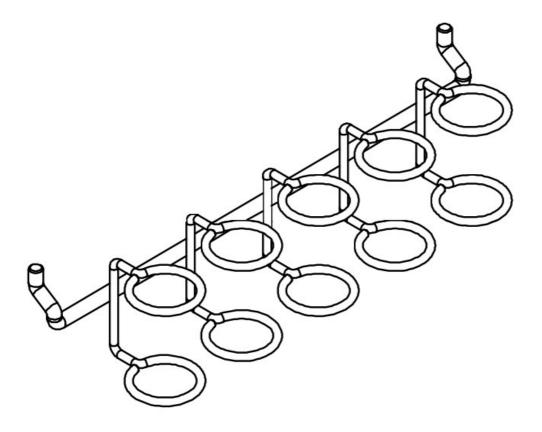


Tools

WRENCH Part No.(#25)Qty 1 pc

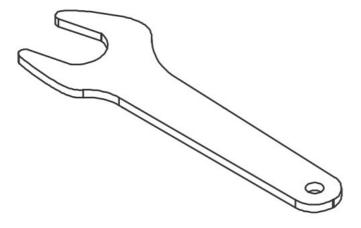

• SCREWDRIVER
Part No.(#21)
Qty 1pc

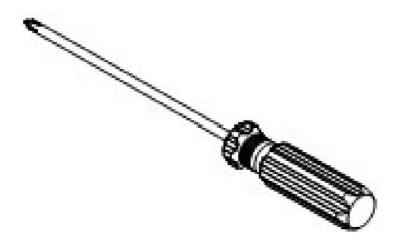


Step 1 - Step 3

Open the package and makesure you haveall the parts. Put the maside then open the package of the Solid Hardwood Top(#1)asthe left photo shows.

Step 1. Install (#48-2) Small Drawer Left Supportand(#48-3) Small Drawer Right Suppo

Attach the (#48-2) Small DrawerLeftSupportto the bottomof the(#1) SolidHardwoodBoard, line up the screwholes, use12pcsof(#50) Screwl and 12pcsof(#59) M6LockWasher to tighten.


Repeat this step toinstall the (#48-3) Small Drawer Right Support.

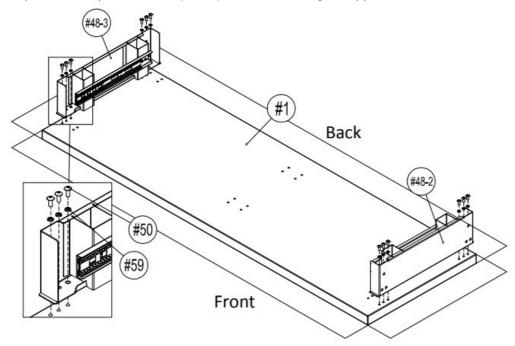

Note: Do not fully tighten any of thescrewsuntil all screws are partially screwedinfirst. Thiswill help you make any adjustments for alignment.

Step 2. Install (#5-C) Left LegPieceand(#5-D)RightLeg Piece


Attach the (#5-C) Left LegPieceand(#5-D)Right Leg Piece to the Small Drawer Left & Right Support, line up the screwholes thenuse 12pc of (#50) Screwl totighten.

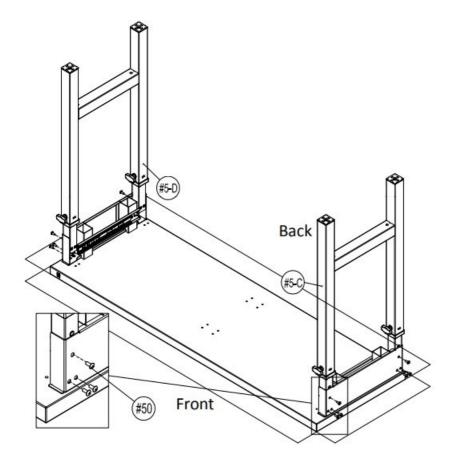

Note: Pay attention to the direction of the Left and Right Leg Piece, the screw knobs on the legs face out to the FRONT.


Step 3. Install (#47) "L" Bracket

Attach the (#47) "L" Bracket to Leg Piece and Solid HardwoodTop(#1), line up the screw holes, use 16pcs of (#50) Screwl to tighten.

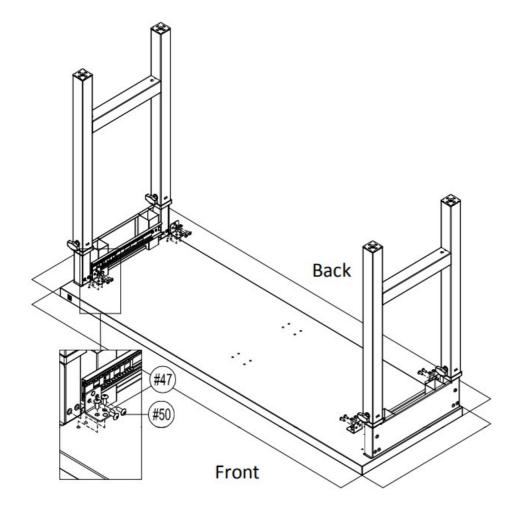


Step 4. Install (#48-1) Small Drawer MiddleSupport

Attach the (#48-1) Small Drawer Middle Support to the (#1) Solid Hardwood Board, lineup the screw holes, use8pcs of (#50)Screwland 12pcs of (#59) M6 Lock Washer to tighten.

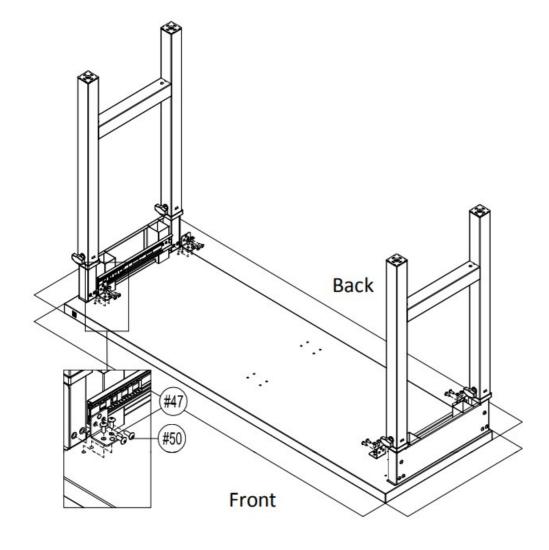


Step 5. Install (#3-B) BottomCrossbar /(#6-1) Leveling Feet

Attach the (#3-B) Bottom Cross bar to the back of (#5) Leg Piece, line up the screwholes, use4 pcs of (#50) Screwl to tighten.

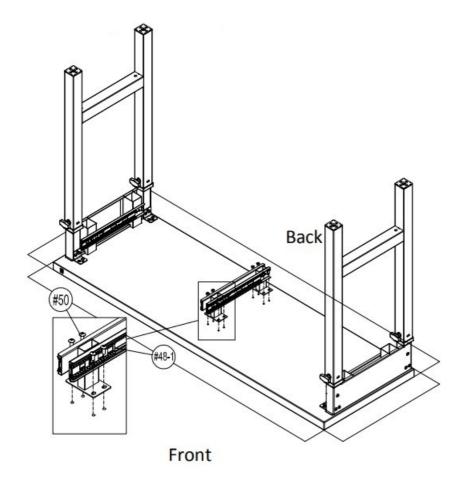

Step 6. Install(#45) Power Stripon the(#70)Power Strip Bracket

Attach 2 pcs ofScrewJ (#51) tothe(#70)Power Strip Bracket then tighten. Line up theholes on the back of the(#45) Power Strip to the bracket, install it onthe(#70) Power Strip Bracket, push down then push left, then push left to fasten.

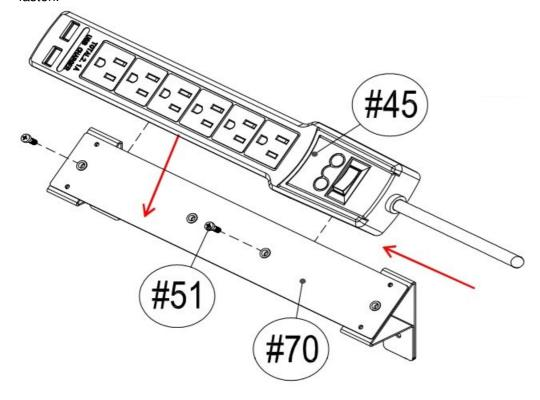


Note: The left and right directionsof PowerStrip can be interchangeable. Just tighten screws on the other twoholes. Pushitin opposite directiontofastenafter installing Power Strip.

(1). Install (#20-1) Drawer Front Panel,(#20-3& #20-4) Left & Right Drawer Side Panels.


Attach (#20-3 -4) Left & Right Drawer Side Panels to the(#20-1) Drawer Front Panel. Line up the screw holes thenuse 4 pcsof (#15) Screw Btotighten.

Note: Do not fully tighten any of thescrewsuntil all screws are partially screwedinfirst. Thiswill help you make any adjustments for alignment.

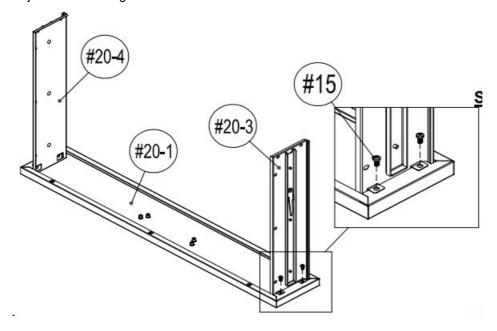


(2). Install (#19-2) Drawer BasePanel

Attach (#19-2) Drawer BasePanel to(#20-3-4) Left & Right Drawer SidePanelsand(#20-1) Drawer Front Panel. Line up thescrew holes and use9pcsof (#15) Screw Btotighten

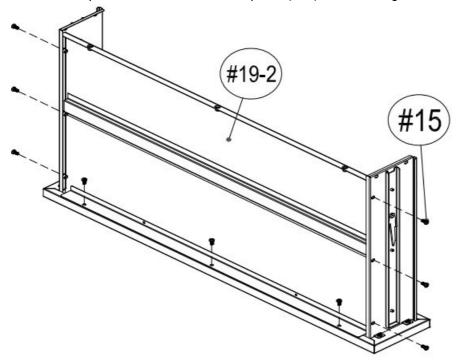

(3). Install (#20-5) Drawer BackPanel


Attach (#20-5) Drawer BackPanel tothe(#20-3 & #20-4) Left & Right Drawer Side Panels and (#19-2) Drawer BasePanel. Line up the screw holes then use7pcsof (#15)Screw Btotighten.

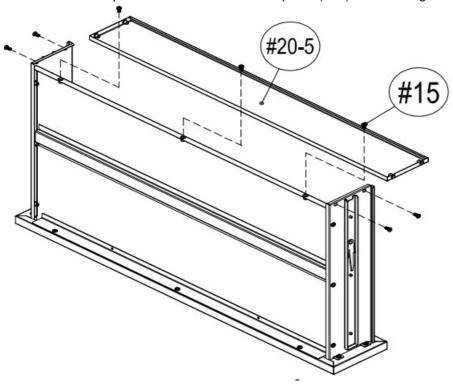

Note: Once you adjust all thepartsinposition, tighten all screws.

(4). Install (#19) Drawer Handle


Attach (#19) Drawer Handle to the(#20-1)Drawer Front Panel. Line up the screwholes then use 4 pcs of (#42) Screw Ntotighten

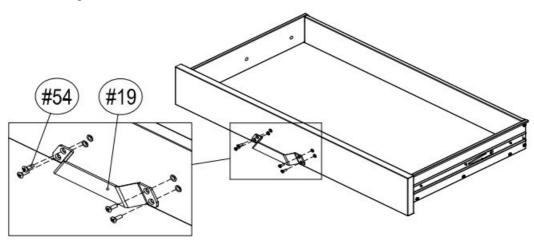


Repeat above stepstoassemble2nddrawer.

Step 8. Insert (#20) Drawer


1. Pull out the drawer sliders to full leng thand move the ball holder of thes lide to the front.

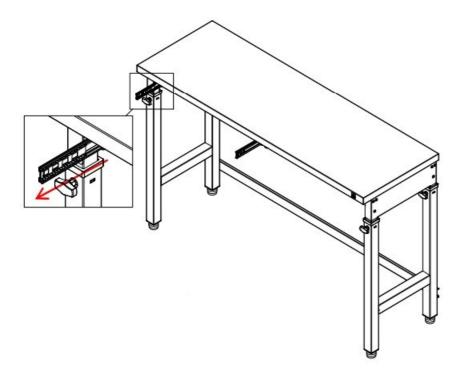


2. Attach and fit the Drawer to the innertrack of the sliders then slidedrawers in slowly.

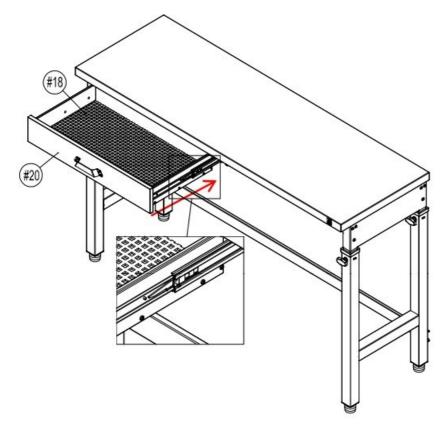


3. Insert (#18) Drawer Matsinside of drawerflatly.

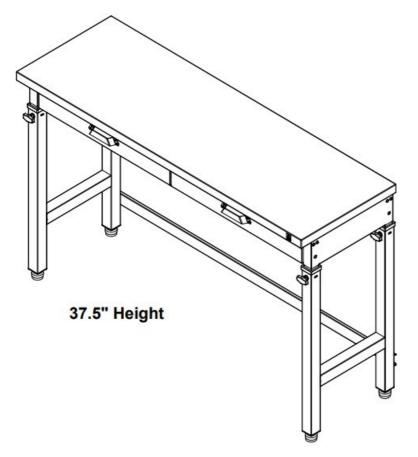

Repeat above steps for the2nddrawer.

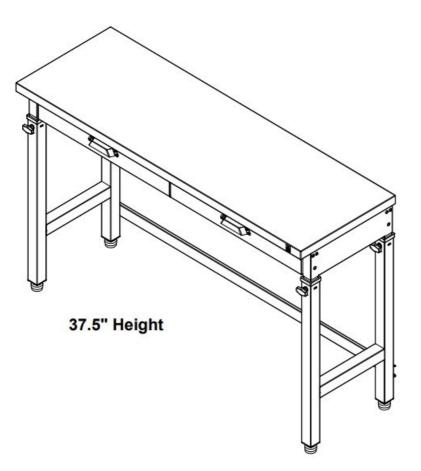

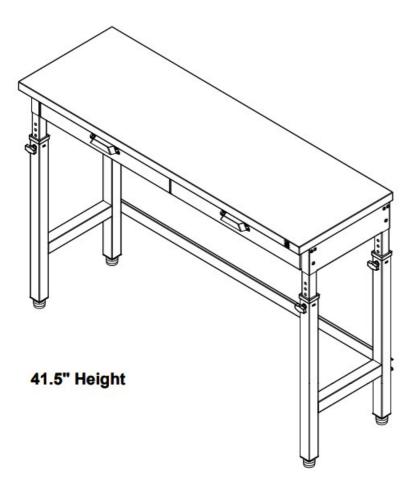

Note:

• Minimum height of workbenc: 37.5"

• Maximum height of workbench: 41.5"

• Each adjusted hole spacing is: 1"

- When adjusting the height, we recommend placing workbench upside down. Remove the leg screw knobs, 41.5" Height 37.5" Height
- Repeat above steps for the2nddrawer. workbench upside down. Remove the leg screw knobs, raise or lower the legs according to your needs then insert screw knobs and tighte

Step 9. Install (#45) Power Strip


Attach (#70) Power Strip Bracket to the Solid Hardwood Top, choose the proper position, use 2 pcs of (#71) ScrewRto tighten.

Note: Adjust the workbench to the desired heigh befo installing the Power Strip.




Step 10. Install (#2-D) PegboardPanel

- 1. Install the (#2-D) Pegboard Panel according to the height of work bench.
- 2. Attach the (#2-D) PegboardPanel ontheedge of work bench, mark four holesthat need to bedrilled on the wall, then put in 4 pcs of (#55-A) Wall Anchor.

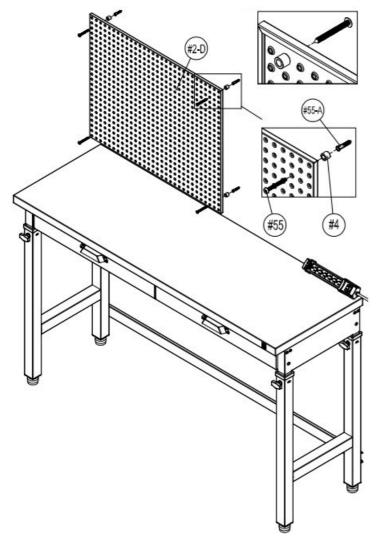

- 3. Remove the protective liner from the double-sided tape of the 4 pcs of (#4) Spacers, stickit to these lected hole on the back of the Pegboard Panel, then use 4 pcs of (#55) Screws Mtotighten.
- 4. Repeat the above steps to install another Pegboard Panel in the sameway.
- 5. Place (#100), (#101), (#103), (#104), (#105),(#106), (#107) Hooks to Pegboard as you desire.

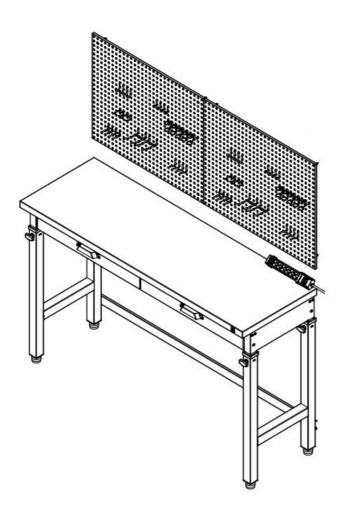



Do not stand on the workbench.

Do not move the workbench while loaded



Recommend using TWO people to assemble the workbench.

Troubleshooting

Problem	Possible Cause	Prevention/ Solution
Not level	Surface not level	Adjust levelingfeet
Drawer does not align	Screws not adjusted	Loosen screws partially, make adju stmentsbymovingup/down/left/right, thentighten screws.

Care & Use Instructions

Care & Use	If the wood top becomes scratched and chipped over time or during assembly,aPolyurethane finish can be applied to help restore the wood's natural texture, aswell as protect the surface from future damage. When applyinga Polyure thanecoa ting, please follow the manufacturer's instruction on the product for application
	Use a soft, clean cloth that will not scratch the surface when cleaning.

Storage Instructions

Do not store this unit where there is excessive humidity, direct abrasionor exposureto the natural elements.

Warranty Information

This product is covered by the Sam's Club Member Satisfaction Guarantee. Pleasevisit <u>samsclub.com</u> for more information.

This product's components have a 1-year guarantee against defects inmaterial and/orworkmanship. If you have any questions regarding the warranty or spare/ replacement parts, please call our toll-free number 1 (800) 323-5565 or email us at Support@SevilleClassics.com.

Distributed by Sam's West Inc. 2101 SE Simple Savings Dr. Bentonville, Arkansas 72716-0745 Made in Taiwan

Need Assistance? Visit us at: samsclub.com/membersmarkhelp

Documents / Resources



Member s Mark 20802 B Height Adjustable 2 Drawer Workbench with Pegboard Set [pdf] I nstruction Manual

990116651, 20802 B, 20802 B Height Adjustable 2 Drawer Workbench with Pegboard Set, 208 02 B Height Adjustable Workbench, Height Adjustable 2 Drawer Workbench with Pegboard Set, Height Adjustable Workbench, Workbench with Pegboard Set, Workbench, Pegboard Set Workbench

References

- Let us know you're not a robot Sam's Club
- ♠ Member's Mark

Manuals+,