

## MERCATOR SPP01G-WIFI Smart Single Power Point Switch User Guide

[Home](#) » [MERCATOR](#) » MERCATOR SPP01G-WIFI Smart Single Power Point Switch User Guide



This product must be installed by a licensed electrician




## Contents [ [hide](#) ]

- [1 Features](#)
- [2 Network/Device Requirements](#)
- [3 Included Accessories](#)
- [4 Technical Specifications](#)
- [5 Dimensions](#)
- [6 Documents / Resources](#)
  - [6.1 References](#)
- [7 Related Posts](#)

## Features

- Wi-Fi (No hub required)
- Touch capacitive switches
- Blue backlight to indicate switch status
- Retrofit to standard mounting brackets
- White, UV resistant material
- Combination head screws
- On/off control via the app (both individual & master)
- Current and historical power monitoring
- Customizable timers & schedules via the app
- Works with both Amazon Alexa and Google Assistant
- 3 year in-home warranty

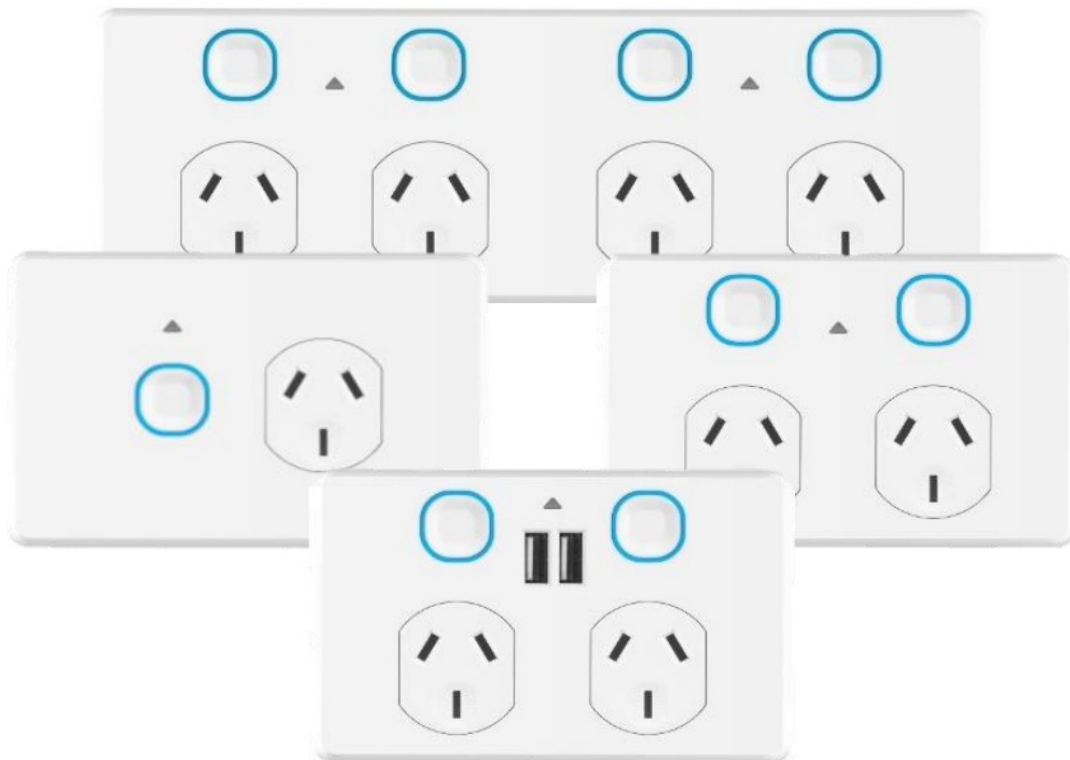

## Network/Device Requirements

Connectivity	Wi-Fi
Requirements	Existing 2.4GHz Wi-Fi network
Protocol	IEEE 802.11 b/g/n
Wireless Frequency	2.4GHz
App Requirements	Mobile device running iOS or Android. (Refer to <a href="http://ikuu.com.au">ikuu.com.au</a> for minimum specs)

## Included Accessories


Faceplate, Cut-out template, Mounting screws. SPP04G-WIFI only: Mounting bracket, Strapping cables

## Technical Specifications


	SPPO1G- WIFI	SPPO2G- WIFI	SPPUSBO2G- WIFI	SPPO4G- WIFI
Outlets	1	2	2	4
Supply Voltage	230 – 250V a.c. 50Hz			
Standby Wattage	<1W			
Operating Load	2500W total (max) – all channels combined			
Switched Poles	Active			
IP Rating	IP20 (indoor use only)			
Terminal Size	6mm <sup>2</sup> (can fit up to 3 x 2.5mm <sup>2</sup> wires per terminal)			
Colour	White			
Rear Colour	Yellow			
Housing Material	Polycarbonate			
Contact Material	Brass			
Weight	145g	150g	160g	300g
Dimensions	115mm x 74mm x 54mm			215mm x 74mm x 54mm
Cut-out Dimensions	80mm x 50mm			180mm x 55mm
Mounting Centres	84mm			
USB Port	N/A	N/A	2x USB 2.0 Type A	N/A
USB output	N/A	N/A	2A (total)	N/A
Compliance / Standards	AS/NZS 3100, AS/NZS 3112, AS/NZS 4268, AS/NZS 60669.1, AS/NZS 60669 2.1, CISPR 14, CISPR 32 AS/NZS 61558 (SPPUSBO2G/SPPUSBO2GMBK only)			

## Dimensions


### SPP01G-WIFI

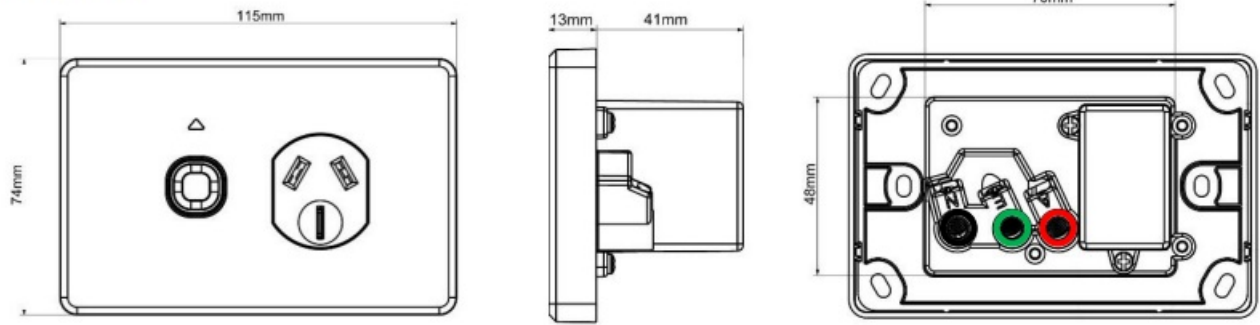

### SPP02G- WIFI & SPPUSB02G- WIFI

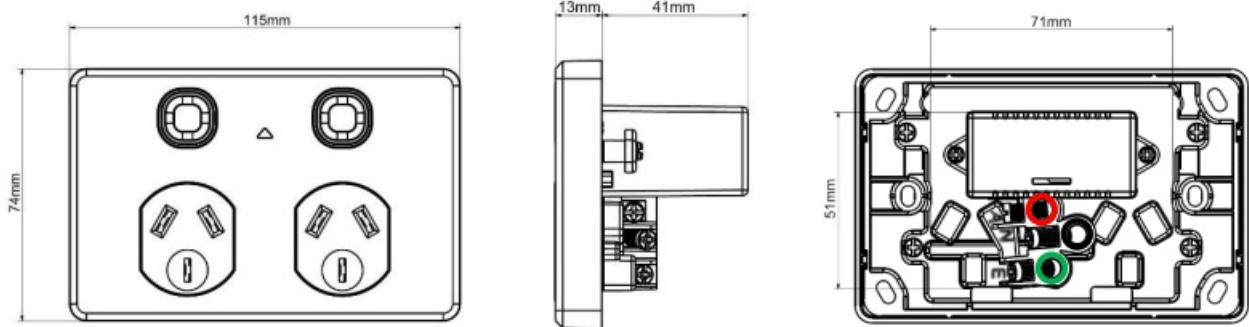

### SPP04G- WIFI

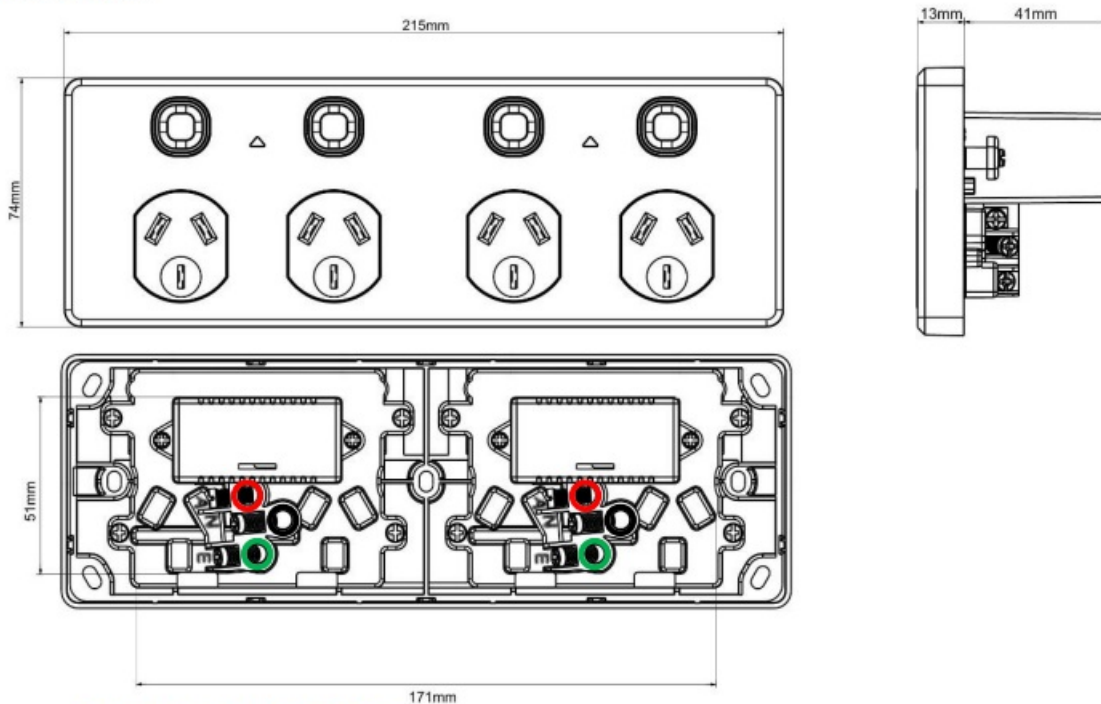

† Strapping cables supplied


This product is valid for 3 years in-home warranty from the date of purchase. Please retain the proof of purchase and certificate of compliance from the installation to make a claim. Please visit <https://www.mercator.com.au/productsupport/warranty> for more information. For Mercator Ikuū contractor or end consumer support please visit [www.ikuu.com.au](http://www.ikuu.com.au) or contact our customer service team on 1300 552 255 or via email at [customercare@mercator.com.au](mailto:customercare@mercator.com.au)



<https://qrco.de/bbY2dE>

\*Download the app using the QR code or visit the iOS or Google Play store.

[www.ikuu.com.au](http://www.ikuu.com.au)



## Documents / Resources

	<p><b><a href="#">MERCATOR SPP01G-WIFI Smart Single Power Point Switch</a></b> [pdf] User Guide SPP01G-WIFI, SPP02G-WIFI, SPPUSB02G-WIFI, SPP04G-WIFI, Smart Single Power Point Switch, SPP01G-WIFI Smart Single Power Point Switch, Single Power Point Switch, Power Point Switch</p>
--	--

## References

- [Homepage | Ikuü](#)
- [Homepage | Ikuü](#)
- [Product Support - Mercator](#)