


MONSGEEK ICE75 RGB Multi Modes Mechanical Keyboard User Manual

[Home](#) » [MONSGEEK](#) » MONSGEEK ICE75 RGB Multi Modes Mechanical Keyboard User Manual 

MONSGEEK ICE75 RGB Multi Modes Mechanical Keyboard

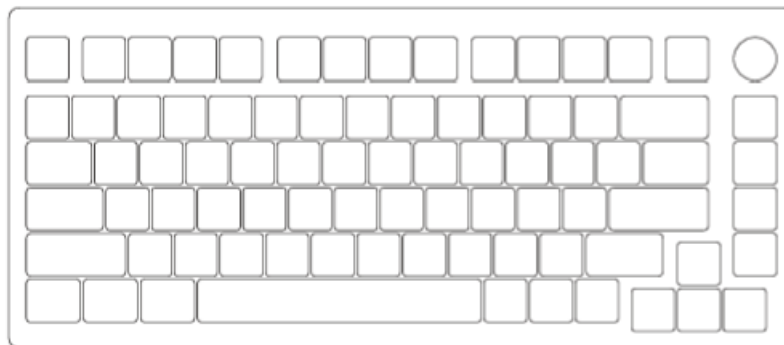



Thank you for supporting MonsGeek   

To provide you with a better user experience, please read this manual carefully before using the product.

Contents

- 1 Packing List
- 2 System Requirement
- 3 USB Connection
- 4 ICE75 LED Indicator List
- 5 ICE75 HotKeys
- 6 ICE75 System Commands (Windows)
- 7 ICE75 System Commands (Mac)
- 8 ICE75 Backlight Settings
- 9 ICE75 Wireless/Wired Connection Guide
- 10 Bluetooth Pairing
- 11 2.4G Pairing
- 12 Battery Level Check
- 13 Key/Lighting Effects Customization Instruction
- 14 MONSGEEK Warranty and Service Statement
- 15 Documents / Resources
 - 15.1 References
- 16 Related Posts

Packing List

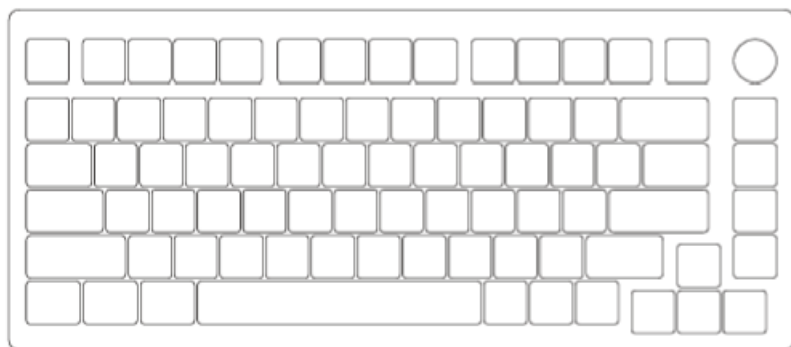

System Requirement

Windows® XP | Vista / 7 / 8 / 10 or higher version


USB Connection

Connect the keyboard to your computer by plugging in the USB cable into an available USB port to start using it.

ICE75 LED Indicator List


Status	Indicator	Re-Connecting	Pairing	Connected
Bluetooth device 1	LED for Key E	Blue light blinks slowly	Blue light blinks fast	Blue light stays on for 2 seconds and then turns off
Bluetooth device 2	LED for Key R	Blue light blinks slowly	Blue light blinks fast	Blue light stays on for 2 seconds and then turns off
Bluetooth device 3	LED for Key T	Blue light blinks slowly	Blue light blinks fast	Blue light stays on for 2 seconds and then turns off
2.4G wireless device	LED for Key Y	Green light blinks slowly	Green light blinks fast	Green light stays on for 2 seconds and then turns off
Wired mode	LED for Key U	N/A	N/A	Red light stays on for 2 seconds and then turns off
Low Battery	Independent LED Indicator Steady green (near spacebar)	Red light blinks slowly		
Charging		Steady green		
Fully Charged		Light off		
Caps	LED for Caps Key	Steady white		
Lock Win	LED for left Win Key	Steady white		

ICE75 HotKeys

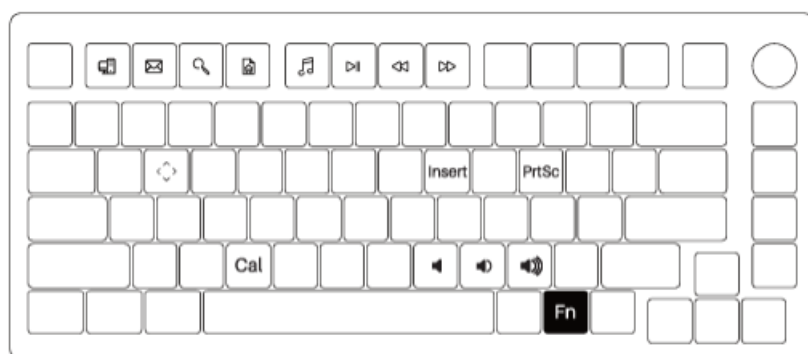


Fn+	F1	=	My Computer
	F2		E-mail
	F3		Windows Search
	F4		Browser Homepage
	F5		Multimedia Player
Fn+	F6	=	Play/Pause
	F7		Previous Song
	F8		Next Song
	C		Calculator
	M		Mute
Fn+	I	=	Insert
	P		Print SCR
	<		Decrease Volume
	>		Increase Volume
	W		Swap WASD With

ICE75 System Commands (Windows)

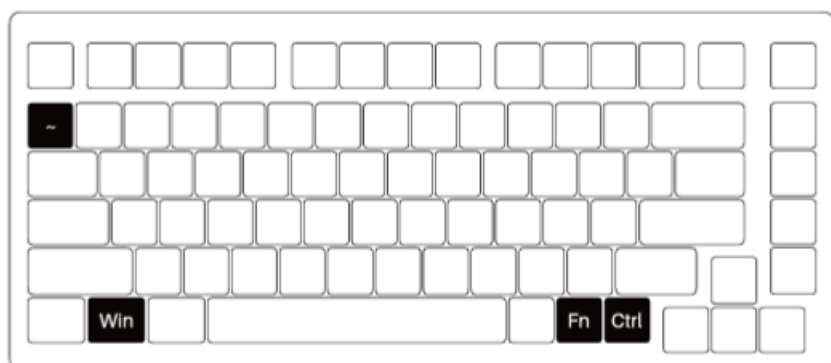


Adjust Volume / Light Brightness



Lock Win key	Restore Factory Settings	Revert Ctrl Menu Key	Win System ⇌ Mac System
Press Fn and left Win key	Hold down Fn and press – key for 5s	Hold down Fn and press right Ctrl key for 3s	Hold down Fn and press o key for 3s


ICE75 System Commands (Mac)

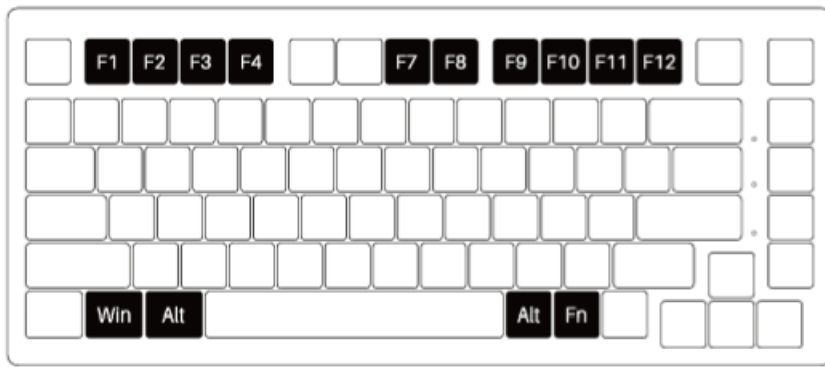

F1	Decrease display brightness
F2	Increase display brightness
F3	Open mission control
F4	Activate Siri
Right Alt	Command
F7	Skip back (Audio)
FS	Pause/Play (Audio)
F9	Skip forward (Audio)
F10	Mute
F11	Volume down
F12	Volume down
Left Win	Option
Left Alt	Command


Fn + (F1-12) F1 ~ F12

ICE75 Backlight Settings

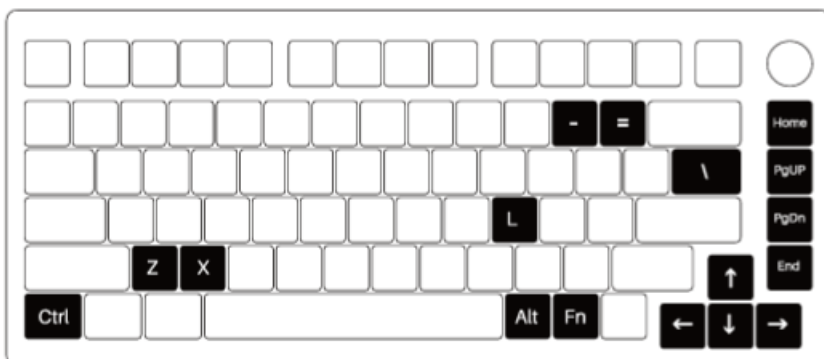

Fn+←	Slower Animation
Fn+→	Faster Animation
Fn+↑	Bright
Fn+↓	Dim
Fn+↶	Set animation direction to left
Fn+↷	Set animation direction to right
Fn+L	light Off/On
Fn+Z	Side light brightness cyclically adjustable in 5 levels
Fn+Home	Effect 1, Effect 2, Effect 3, Effect 4, Effect5
Fn+PgUp	Effect6,Effect7, Effect 8, Effect 9, Effect10
Fn+End	Effect 11, Effect 12, Effect 13, Effect 14, Effect 15
Fn+PgDn	Effect 16, Effect 17, Effect 18, Effect 19, Effect 20
Fn+\\	This shortcut allows you to set the backlight color to 7 single color with RGB loop effect
Fn+Left Ctrl	Side light modes cyclically adjustable in 6 levels (including OFF option)
Fn+Left Alt	In side light mode, adjust the light color to 7 single colors + RGB circle
Fn+X	Side light animation speed cyclically adjustable in 5 levels

ICE75 Wireless/Wired Connection Guide

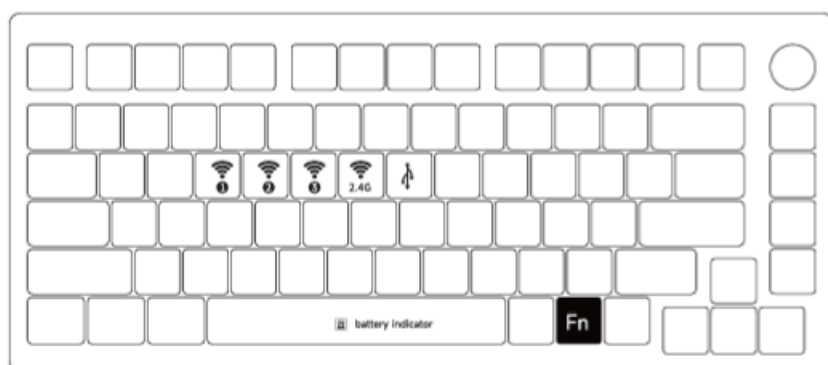

Fn+	E	=	Bluetooth Device 1
	R		Bluetooth Device 2
	T		Bluetooth Device 3
	Y		2.4G Wireless Device
	U		Wired Mode

Bluetooth Pairing

After turning on the keyboard, press Fn-1-E/R/T to enter Bluetooth mode. Press and hold the FntE/R/T combination key for 3 seconds to put the keyboard in pairing mode, with the blue indicator light flashing quickly. After connecting, the indicator light remains on for 2 seconds. If no available device is connected, the LED indicator will turn off and the keyboard will enter sleep mode.

2.4G Pairing

After turning on the keyboard, press Fn+Y to enter 2.4G mode. Then press and hold the Fn+Y combination key for 3 seconds to enter pairing mode. Then insert the receiver, and the green indicator light will flash quickly. Once pairing is successful, the LED indicator will stay on for 2 seconds. If no available device is found within 30 seconds, the LED indicator will turn off and the keyboard will enter sleep mode.

Battery Level Check

Press the Fn+Spitee combination key to check the battery level in wireless mode. If the battery level is below 30%, the LED for number keys 1-2 will show a red light. If it's between 30-100%, the LED for number keys 1-9 will show a green light. And when the battery is fully charged, the LED for number keys 1-0 will show a green light.

1	2	3	4	5	6	7	8	9	0
Less than 30%	Less than 40%	Less than 50%	Less than 60%	Less than 70%	Less than 80%	Less than 90%	Less than 100%	Full charged	
Red light		Green light							

Key/Lighting Effects Customization Instruction

1. The key/lighting effects customization can be programmed with MonsGeek Driver
2. The lighting effects can also achieve music rhythm effects with MonsGeek driver
3. Please visit monsgeek.com/download/ to download the driver

MONSGEEK Warranty and Service Statement

1. MONSGEEK offers a One-Year warranty for customers in mainland China.
For other regions, please contact your seller (MonsGeek distributor) for specific warranty details.
2. If the warranty period expires, customers are responsible for repair costs.
MONSGEEK provides instructions for self-repair if preferred, but users assume full responsibility for any losses incurred during the process.
3. Defects resulting from disassembly of our product, improper usage and incorrect installation are not covered by warranty.
4. Return and warranty policies may vary across platforms and are subject to the specific distributor's terms at the time of purchase.

Company: Shenzhen Yinchon Technology Co., Ltd

Address: 33 Langbi Rd, Bitou Community 1st Industrial Zone, Bao'an District, Shenzhen, China

Tel: 0755-23216420

Website: www.monsgeek.com

Origin: Shenzhen, China



WARNING: water and beverages Can't be poured into the keyboard.



Precautions

Man-made damage is not limited to immersion, falling off, and pulling off the wires with excessive forces,

etc.



Documents / Resources



[MONSGEEK ICE75 RGB Multi Modes Mechanical Keyboard](#) [pdf] User Manual
ICE75 RGB Multi Modes Mechanical Keyboard, ICE75 RGB, Multi Modes Mechanical Keyboard, Modes Mechanical Keyboard, Mechanical Keyboard, Keyboard

References

- [User Manual](#)