

MORNYSTAR S8 Helmet Bluetooth Intercom Kit Instruction Manual

Home » MORNYSTAR » MORNYSTAR S8 Helmet Bluetooth Intercom Kit Instruction Manual





INSTRUCTION MANUAL Helmet Bluetooth Intercom kit







Contents

- 1 Parts List
- 2 Installation Steps
- 3 Charge
- **4 Specifications**
- **5 Product Introduction**
- **6 Power Detect & Notification**

Function


- 7 Turn on/off
- 8 Pairing with mobile phone
- 9 Pairing Between Two S8(A and B)
- **10 Group Intercom Settings**
- 11 Phone Operation
- **12 Music Function**
- 13 FM Function
- 14 Music sharing function
- 15 Music sound selection
- **16 Memory Clean**
- 17 FCC Warnning:
- 18 Documents / Resources
 - 18.1 References

Parts List



Installation Steps

2.1 Installation method with plastic clamp

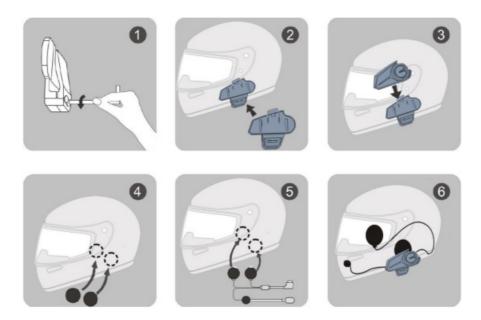

- 1. Loosen the screws on the back of clamp with the provided screw driver.
- 2. Open the lining of helmet ,insert the clamp in the proper position on the left of helmet and fasten the screw(overly fastened screw can damage the clamp).
- 3. Slide the receiver down into the slots on the headset clamp mount. Make sure that it is locked in securely.
- 4. Open the lining of helmet (at ear's position), clean the EPS surface and affix the Velcro on with the rough surface.
- 5. Affix the hook surface of earphone to the rough surface of Velcro and properly tidy the helmet lining.
- 6. Insert the headphone plug into the corresponding headphone jack on the receiver to finish the installation.

2.2 Installation method with vecro clamp







- 1. Tear off the white paper on vecro and stick the Velcro onto clamp&helmet.
- 2. Stick the clamp with Velcro onto helmet.
- 3. Slide the receiver down into the slots on the headset clamp mount. Make sure that it is locked in securely.

Charge



- 1. Connect the cable with device and PC USB port;
- 2. After cable connected, the red light on and start to charge, when battery is full, the red light will be off automatically, The green light is on.

Specifications


Operating Range————	—Up to 1200meters
Bluetooth Standby Time-	—Up to 200 hours
Bluetooth Time————	Up to 16 hours
Charging Time————	—About 2.5 hours
Charging Interface————	Type-C universal plug
Battery Type————	-Rechargeable Li-Polymer Batteries
Power Supply————	—DC 5V 500mA
Operating Temperature———	— -14F-131F(-10°C-55°C)
Storage Temperature————	— -4F-140F(-20°C-60°C)

Product Introduction



Power Detect & Notification Function

Press and hold for 2 seconds at the same time(Power on status)

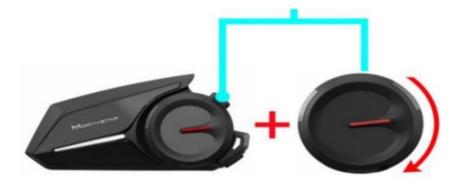

When device is on, Press and hold On/Off Button and turn the wheel clockwise for 2 seconds at the same time, recorded voice message will tell you:

Power over 90% Power over 50% Power lower than 50% Power lower than 10%, please recharge immediately

Turn on/off

(1) Turn on

When the device is off, Press and hold the On/Off Button for 3 seconds




(2) Turn off

When device is on, Press and hold the On/Off Button for 3 seconds



Pairing with mobile phone

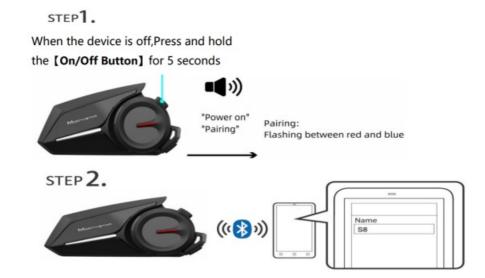

Switch cellphone Bluetooth, choose S8, the pairing is complete.

After successful pairing, there will be a "device connected" prompt sound, indicating successful Bluetooth connection.

Pairing Between Two S8(A and B)



Pairing instructions:

- Step 1. Ensure both S8 are within 1meter visible range of each other.
- Step 2. When device A is on , Press and hold the Multi-function Button for 3 seconds, it will flash red and blue to enter search mode;
- Step 3. When device B is off, Press and hold the On/Off Button for 5 seconds, it will flash red and blue to enter pairing mode.

(When these 2 headsets enter pairing status, it will automatically search for pairing, and the blue light will flash after the pairing is successful.)

Step 4. Press the On/Off Button of any headset to enter the intercom.

Group Intercom Settings

Pairing instructions:

- Step 1. Ensure all S8 are within 1meter visible range of each other.
- Step 2. Press and hold the On/Off Button for 5 seconds on all ABCDEF devices, and the red and blue fast flashing will enter pairing mode;



Step 3. Choose any one device, Press the On/Off Button once, the red and blue fast flashing will change to slow flashing, and it will automatically enter the search pairing process;

(Wait for a moment, it will automatically pair all devices, and when the connection is successful, the blue light on all devices will flash slowly.)

Press the [On/Off Button] once



Step 4. Press the On/Off Button of any headset to enter the intercom.

Phone Operation

Answering Call	Refuse Call	Redial
Click it once	Press and hold for 2 seconds	Double click
Volume Up	Volume Down	Manual/Auto Switch
Turn the Wheel clockwise once	Turn the Wheel counter clockwise once	When the device is on, Press and hold [On/Off Button] and turn the wheel counter clockwise for 2 seconds at the same time
Activate Siri Function		
When the device is on, Quickly double-click the [On/Off Button]		

Music Function

When the device is on, proceed as follows:

Music play	Volume Up	Play Next
When musicis paused,Click it once	Turn the Wheel clockwise once	Turn the Wheel clockwise and hold for 2 seconds
Music Pause	Volume Down	Play Previous
When musicis playing,Click it once	Turn the wheel counter clockwise once	Turn the Wheel counter clockwise and hold for 2 seconds

When the device is turned on, proceed as follows, It will turn on/off the FM function.

Press and hold the [On/Off Button] and [Multi-function Button] for 2 seconds



Volume Up	Volume Down	Search Next	Search Previous
Turn the Wheel clockwise once	Turn the wheel counter clockwise once	Turn the Wheel clockwise and hold for 2 seconds	Turn the Wheel counter clockwise and hold for 2 seconds

Music sharing function

Steps:

- 1. Device A is paired with the phone via Bluetooth;
- 2. Pairing device A and device B;
- 3. When the pairing between two devices (AB) is successful, device A quickly double-click the Volume + Button to turn on/off music sharing.



Music sound selection

3 sound options:


- 1. pure vocals;
- 2. DJ music;
- 3. popular music

When playing music, quickly double-click the Volume – Button to switch to the next sound effect, which can be looped through.



Memory Clean

When the device is turned on, Press and hold On/Off Button and turn the wheel clockwise for 5 seconds at the same time



FCC Warnning:

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection againstharmful interference in a residential installation. This equipment generates, uses and can radiateradio frequency energy and, if not installed and used in accordance with the instructions, maycause harmful interference to radio communications. However, there is no guarantee thatinterference will not occur in a particular installation. If this equipment does cause harmfulinterference to radio or television reception, which can be determined by turning the equipmentoff and on, the user is encouraged to try to correct the interference by one or more of thefollowing measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Caution: Any changes or modifications to this device not explicitly approved by manufacturer could void your authority to operate this equipment.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1)This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 0cm between the radiator and your body.



|--|

References

• User Manual

Manuals+, Privacy Policy

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.