




## nedis Bluetooth Multi Adapter User Guide

[Home](#) » [nedis](#) » nedis Bluetooth Multi Adapter User Guide


*nedis*

**Bluetooth® Multi Adapter  
for streaming audio, charging, and hands-free calling  
BTMA200BK**

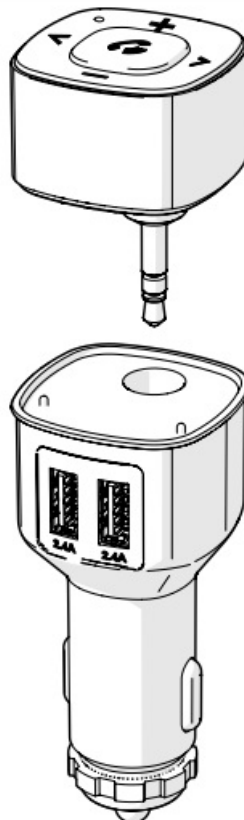



<http://ned.is/BTMA200BK>

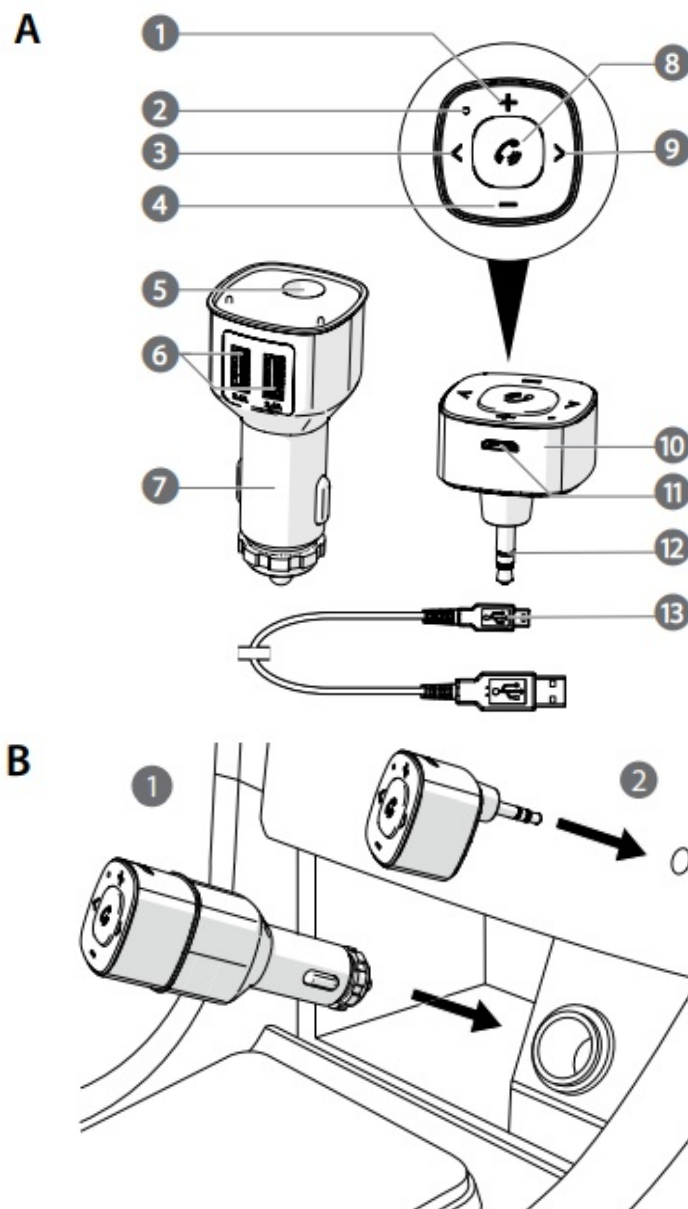

## Contents [ [hide](#) ]

- [1 Quick start guide](#)
- [2 Specifications](#)
- [3 Safety instructions](#)
- [4 Pair with Bluetooth](#)
- [5 Making phone calls](#)
- [6 Declaration of Conformity](#)
- [7 Documents / Resources](#)
  - [7.1 References](#)
- [8 Related Posts](#)

## Quick start guide

Bluetooth® Multi Adapter  
BTMA200BK



For more information see the extended manual online: [ned.is/btma200bk](http://ned.is/btma200bk)

### Intended use

The Nedis BTMA200BK is intended to be used as a hands-free kit with Bluetooth.

The product has a built-in microphone for making hands-free calls and the

integrated USB charging ports can be used to charge any device.

The product is intended for indoor and car use only.

The product is not intended for professional use.

The product is exclusively intended for playing music from a Bluetooth device and for answering and making hands-free phone calls.

This product can be used in a car using the auxiliary power plug or indoors using the AUX plug.

Any modification of the product may have consequences for safety, warranty, and proper functioning.

### Specifications

Product	Bluetooth® Multi Adapter
Article number	BTMA200BK
Bluetooth® version	4.2
Bluetooth® frequency range	2402 – 2480 MHz
Maximum transmit power	4 dBm
Hands-free calling	Yes
Built-in microphone	Yes
Maximum battery play time (at 50% volume)	Up to 7 hours
Maximum battery talk time	Up to 5.5 hours
Maximum charging time	Up to 2 hours
Battery type	Lithium-Polymer
Battery capacity	300 mAh
USB charging output	2 x 5.0 V / 2.4 A
Connections	AUX input

### Main parts (image A)

1 Volume up button	8 Multifunctional button with LED
2 Microphone	9 Next button
3 Previous button	10 Bluetooth receiver
4 Volume down button	11 Micro USB port
5 AUX port	12 AUX plug
6 USB charging port (2.4 A)	13 Micro USB cable
7 Auxiliary power plug	

## Safety instructions



To prevent possible hearing damage, do not listen at high volume levels for long periods.



### **WARNING**


- Ensure you have fully read and understood the instructions in this document before you install or use the product. Keep this document for future reference.
- Only use the product as described in this document.
- Do not use the product if a part is damaged or defective. Replace a damaged or defective product immediately.
- Do not drop the product and avoid bumping.
- This product may only be serviced by a qualified technician for maintenance to reduce the risk of electric shock.
- Do not expose the product to water or moisture.
- This product is equipped with a non-removable internal battery. Do not attempt to replace the battery yourself.
- Only use the provided USB charging cable.
- Charge the battery for at least 2 hours before using the product for the first time.
- Do not overcharge the battery.
- After extended periods of storage, it may be necessary to charge and discharged the cells or batteries several times to obtain maximum performance.
- Do not leave the battery on prolonged charge when not in use.
- Disconnect the product from the power source and other equipment if problems occur.
- Do not expose the product to direct sunlight, naked flames, or heat.
- Do not place the product near heat sources, this can damage the product.
- Do not expose the product to very hot or very cold temperatures or drastic changes in temperature or humidity.
- Do not immerse the product in water for cleaning.
- Some wireless products may interfere with implantable medical devices and other medical equipment, such as pacemakers, cochlear implants, and hearing aids. Consult the manufacturer of your medical equipment for more information.
- Be careful when using the product while driving. Always focus your attention on the road.

## Installing the product (image B)

1. Plug the Bluetooth receiver **A10** into the AUX port **A5** of the auxiliary power plug **A7**.
2. Plug **A7** into the auxiliary power port of your car. Alternatively, plug Aq directly into the AUX port of your car or an indoor device which enables the device to have a Bluetooth connection.

### Switching on the top of the Bluetooth receiver A10


Press and hold the multifunctional button with LED **A8** for 3 seconds to switch Aq on or off.


 product automatically switches off when there is no Bluetooth connection for more than 10 minutes.

### Pair with Bluetooth

After switching on the product, **A8** blinks and emits a prompt: "Power on".

1. Enable Bluetooth on the device you want to pair.
2. Select "BTMA200BK" from the list of available Bluetooth devices on your device.
3. If asked, enter the pairing code '0000'.

 -If the product has already been paired with another device, make sure that the device is switched off or Bluetooth is disabled.

 -When the product has lost connection to the Bluetooth source, it will automatically reconnect when back in range and switched on.

### Playing music

Play music directly from the mobile device that is connected to the product via Bluetooth.

### Controlling the music

1. Press **A8** to play or pause music.
2. Press the next button **A9** to skip to the next song.
3. Press the previous button **A3** to go back to the previous song.
4. Press and hold the volume up button **A1** to increase the volume.
5. Press and hold the volume down button **A4** to decrease the volume.
6. During a call, press and hold **A8** for 3 seconds to switch to private mode. If you receive a call while playing music, the product automatically switches to the phone call.

### Making phone calls

1. To answer an incoming call, press **A8**.
2. During a call, press and hold **A8** for 3 seconds to switch to private mode.
3. To end a call, press **A8**.
4. To quickly redial the last called number, double press **A8**.
5. To reject an incoming call, press and hold **A8** for 3 seconds.

### Charging the product

When the battery is low, Aq gives a prompt sound and the status of the battery is shown on the connected device. There are two ways to charge the product: with the auxiliary power plug (option A) or using the micro USB port (option B).

Option A:

1. Plug the AUX plug **A12** into **A5** to charge **A10**.

2. Plug **A7** into the auxiliary power port of the car.

Option B:

1. Plug the micro USB cable **A13** into the micro USB port **A11**.
2. Plug the other end of the micro USB cable into a USB port made for charging.



You cannot use the product while charging it via the micro USB port.

### Charging your devices

- Connect your device to the USB charging port (2.4 A) **A6** using **A13**.
- 4 See the manual of your device to check if your device supports 2.4 A charging.

### Declaration of Conformity

We, Nedis B.V. declare as a manufacturer that the product BTMA200BK from our brand Nedis ® , produced in China, has been tested according to all relevant CE standards and regulations and that all tests have been passed successfully. This includes, but is not limited to the RED 2014/53/EU regulation.

The complete Declaration of Conformity (and the safety datasheet if applicable) can be found and downloaded via: [nedis.com/BTMA200BK#support](http://nedis.com/BTMA200BK#support)


For additional information regarding the compliance, contact the customer service: Web: [www.nedis.com](http://www.nedis.com)

E-mail: [service@nedis.com](mailto:service@nedis.com)

Nedis B.V., de Tweeling 28

5215 MC 's-Hertogenbosch, the Netherlands

### Documents / Resources

	<a href="#">nedis Bluetooth Multi Adapter</a> [pdf] User Guide Bluetooth Multi Adapter streaming audio charging and hands-free calling, BTMA200BK
---	--

### References

- [Bluetooth® Multi Adapter](#) | Connection output: 1x 3.5 mm | SBC | up to 7 Hours | Built-in microphone | Volume control | Automatic power off function | Black / Grey | Nedis
- [Bluetooth® Multi Adapter](#) | Connection output: 1x 3.5 mm | SBC | up to 7 Hours | Built-in microphone | Volume control | Automatic power off function | Black / Grey | Nedis
- [Bluetooth® Multi Adapter](#) | Anschlüsse – Ausgang: 1x 3.5 mm | SBC | bis zu 7 Stunden | Eingebautes Mikro | Lautstärke-Regler | Automatische Ausschaltfunktion | Grau / Schwarz | Nedis
- [Multiadaptador Bluetooth®](#) | Salida de conexiones: 1x 3.5 mm | SBC | Hasta 7 horas | Micrófono incorporado | Control de Volumen | Función de apagado automático | Gris / Negro | Nedis
- [Bluetooth® Adapteri](#) | Lähtöliitäntä: 1x 3.5 mm | SBC | Jopa 7 tuntia | Sisäänrakennettu mikrofoni | Äänenvoimakkuuden Säätiö | Automaattinen virrankatkaisutoiminto | Harmaa / Musta | Nedis
- [Multi adaptateur Bluetooth](#) | Sortie de connexions: 1x 3.5 mm | SBC | Up to 7 Hours | Microphone

[intégré](#) | [Contrôle du Volume](#) | [Fonction hors tension automatique](#) | [Gris / Noir](#) | [Nedis](#)

-  [Maintenance – Nedis SA](#)
-  [Adattatore multiplo Bluetooth® | Uscita collegamento: 1x 3,5 mm | SBC | Fino a 7 ore | Microfono incorporato | Controllo del Volume | Funzione di spegnimento automatico | Grigio / Nero | Nedis](#)
-  [Bluetooth® Multi-Adapter | Output: 1x 3,5 mm | SBC | Tot 7 Uur | Ingebouwde microfoon | Volumebediening | Automatische uitschakelfunctie | Grijs / Zwart | Nedis](#)
-  [Bluetooth® Multi Adapter | Connection output: 1x 3.5 mm | SBC | up to 7 Hours | Built-in microphone | Volume control | Automatic power off function | Black / Grey | Nedis](#)
-  [Multiadaptador Bluetooth® | Salida de conexiones: 1x 3.5 mm | SBC | Hasta 7 horas | Micrófono incorporado | Control de Volumen | Función de apagado automático | Gris / Negro | Nedis](#)
-  [Bluetooth® Multi Adapter | Connection output: 1x 3.5 mm | SBC | up to 7 Hours | Built-in microphone | Volume control | Automatic power off function | Black / Grey | Nedis](#)
-  [Bluetooth® Multi Adaptér | Výstupní konektor: 1x 3,5 mm | SBC | Až 7 hodin | Vestavěný mikrofon | Ovládání Hlasitosti | Funkce automatického vypnutí | Černá / Šedá | Nedis](#)
-  [Nedis | Your wholesaler of consumer electronics](#)
-  [Nedis | Your wholesaler of consumer electronics](#)