



OMOTON KB515 Bluetooth Keyboard User Manual

[Home](#) » [OMOTON](#) » OMOTON KB515 Bluetooth Keyboard User Manual 

Contents

- [1 OMOTON KB515 Bluetooth Keyboard](#)
- [2 Keyboard Specifications](#)
- [3 Package Contents](#)
- [4 Compatible Systems](#)
- [5 Hotkeys and media keys](#)
- [6 Pairing](#)
- [7 Troubleshooting](#)
- [8 IMPORTANT SAFEGUARDS & PRECAUTIONS](#)
- [9 Documents / Resources](#)
 - [9.1 References](#)
- [10 Related Posts](#)

OMOTON

OMOTON KB515 Bluetooth Keyboard



Keyboard Specifications

- **Working Voltage:** DC 3.0 V
- **Working Current:** <2.4mA
- **Product Weight:** 490 ± 5g

- **Keyboard Dimension:** 434.5 x 121 x 21.9 mm
- **Working distance:** <10 M
- **Battery:** 2 x AAA (Not included)










Package Contents




- 1 x Wireless Keyboard
- 1 x User Manual

Compatible Systems

- MacOS;

Hotkeys and media keys

-  Escape
-  Bright Down
-  Bright Up
-  Open Mission Control
-  Open Launchpad
-  Prev Track
-  Play/Pause
-  Next Track
-  Mute

-  F11 Volume Down
-  F12 Volume Up
-  Eject

Note:

1. The input language of the device should be the same as the layout of the Keyboard.

2. **US:** Shift+  = \$ UK:  +  = £

LED1:

1. Power Indicator: The power indicator will be on blue for 3 seconds when the power switch has been turned on.

LED1/LED2/LED3:

1. Bluetooth Status Indicator: Blue light for pairing mode and switching channel.
2. Caps Lock Indicator: The caps lock indicator will be blue when the caps lock is activated.


LED4:

1. Low Battery Indicator: Red light will flash when the battery runs low.


Specify a keyboard type on Mac:

1. On your Mac, choose Apple Menu > System Preferences, then click the keyboard.
2. Click “Change Keyboard Type”, then follow the onscreen instructions.

Pairing

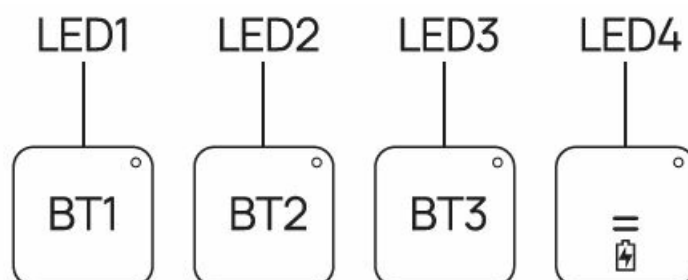

1. Turn on the keyboard.

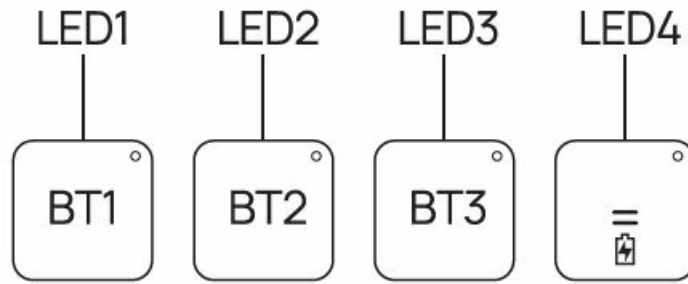

2. Press “Fn + BT1 ” for 1 second to switch to the channel, and Press “Fn + BT1 ” for 3~5 seconds, or until the LED starts flashing blue to enter pairing mode.
3. Verify your device’s Bluetooth settings being enabled. System Preferences – Bluetooth: On.
4. Select “OMOTON Keyboard” from your device’s list of available devices to complete pairing.
5. The blue indicator will turn off after successfully paired. This product has three independent Bluetooth channels. Press and hold Fn + BT2 or Fn + BT3 to enter pairing mode and repeat the steps above for pairing the keyboard to another device.

How To Switch Bluetooth Channels

(Take BT2 Channel for example)

1. All channels paired, press the “Fn+BT2” button for 1 second to switch between paired devices.
2. The BT light will turn on for 3 seconds, and then turn off if the device is already connected to the keyboard.
3. Each “BT” button is connected to an independent pairing channel.

Power Saving Mode

- When you aren’t using the keyboard, it goes to sleep to conserve battery power. Press any button and wait for 3 seconds to reactivate it. If you won’t be using your keyboard for an extended period, turn it off to conserve even more power.

Replacing Batteries

- The low Battery Indicator will flash red when batteries are running low. Replace the spent batteries with two new AAA batteries to continue typing (Batteries not included).

Troubleshooting

If you cannot connect the Bluetooth keyboard to your device, or if the keyboard is not working, please try the following:


1. Ensure your device has Bluetooth and Bluetooth is enabled.
2. Delete the pairing name on the Bluetooth settings. Restart the device and try to pair again.
3. Cancel the Bluetooth connection with other devices, and try to pair again.
4. Check to see if the Bluetooth software has been updated recently. If it hasn’t, update the software and try to pair again.
5. Make sure the Bluetooth keyboard is within 33ft (10m) of your device.

IMPORTANT SAFEGUARDS & PRECAUTIONS

1. SAVE THESE INSTRUCTIONS-This sheet contains important safety and operating instructions.
2. Remove the batteries if the product is not going to be used for a long period of time.
3. For indoor use only. Never exposed to direct sunlight or wet weather conditions.
4. Do not use it if the equipment is damaged.
5. Do not disassemble the product. Disassembly may result in a risk of safety hazards.
6. Do not throw or shake the product.

- Web: www.omoton.com.
 - USA & Canada: support@omoton.com.
 - UK & EU service@omoton.com.
-

Documents / Resources

	OMOTON KB515 Bluetooth Keyboard [pdf] User Manual KB515 Bluetooth Keyboard, KB515, Bluetooth Keyboard, Keyboard
--	--

References

- [User Manual](#)