



OPTONICA 6314 6 Key LED Touch Controller User Manual

[Home](#) » [OPTONICA](#) » OPTONICA 6314 6 Key LED Touch Controller User Manual 

OPTONICA 6314 6 Key LED Touch Controller User Manual



1. Supply voltage of this product is DC12V-24V, never connect to others or AC220V.
2. Lead wire should be connected correctly according to grade that connecting diagram offers.;
3. This product can not be overloaded.

Contents

- [1 Technology parameter](#)
 - [1.1 Technical Parameters \(controller\)](#)
- [2 Button function](#)
- [3 Connecting Chart](#)
- [4 Documents / Resources](#)
- [5 Related Posts](#)

Technology parameter


Technical Parameters (remote control):

- 1. **Power supply:** AAA battery * 3pcs
- 2. **Cover material:** ABS
- 3. **Fabrication processing:** multicolour printing & UV varnish
- 4. **RF frequency:** 433.92MHZ

Technical Parameters (controller)

- 1. **Working temperature:** -20 C-60 C
- 2. **Working voltage:** DC12V/24V
- 3. **Output control:** 3 circuits(R/G/B)
- 4. **Output current:** 18A
- 5. **Connection method:** common anode
- 6. **RF frequency:** 433.92MHZ
- 7. **Receiving range:** 20meters
- 8. **Controller size:** L130xW42xH31mm
- 9. **Net weight:** 250g
- 10. **Gross weight:** 280g
- 11. **Static power consumption:** <1W
- 12. **Output power:** 12V < 216W; 24V <432W;


Button function

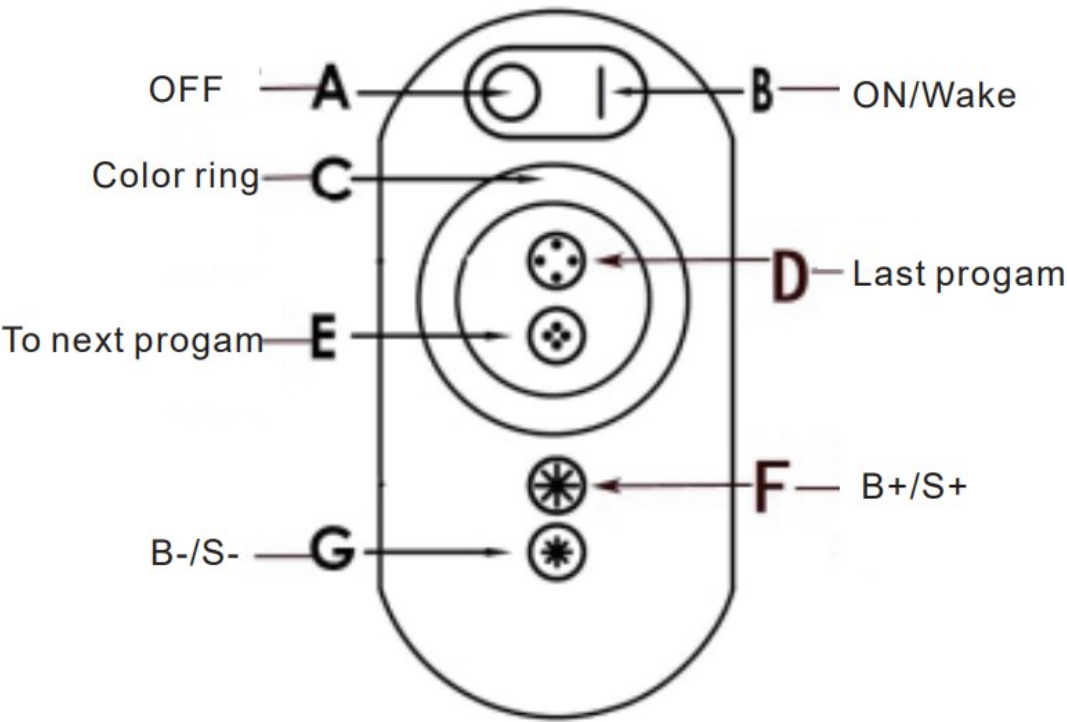

NO.	Changing color	Note
-----	----------------	------

1	Static red	A.D.E.F.G. effected
2	Static Green	A.D.E.F.G. effected
3	Static Blue	A.D.E.F.G.effected
4	Static yellow	A.D.E.F.G.effected
5	Static purple	A.D.E.F.G effected
6	Static cyan	A.D.E.F.G.effected
7	Static white	A.D.E.F.G.effected
8	3 color jump changing	A.D.E.F.G.effected
9	7color jump changing	A.D.E.F.G.effected
10	3 color fade away	A.D.E.F.G. effected
11	3 color general changing	A.D.E.F.G. effected
12	7 color fade away	A.D.E.F.G. effected
13	7color general changing	A.D.E.F.G. effected
14	3 color flicker	A.D.E.F.G. effected
15	7 color flicker	A.D.E.F.G. effected
16	3 color strobe-flash	A.D.E.F.G. effected
17	7 color strobe-flash	A.D.E.F.G. effected
18	Auto changing	A.D.E.F.G. effected

Connecting Chart

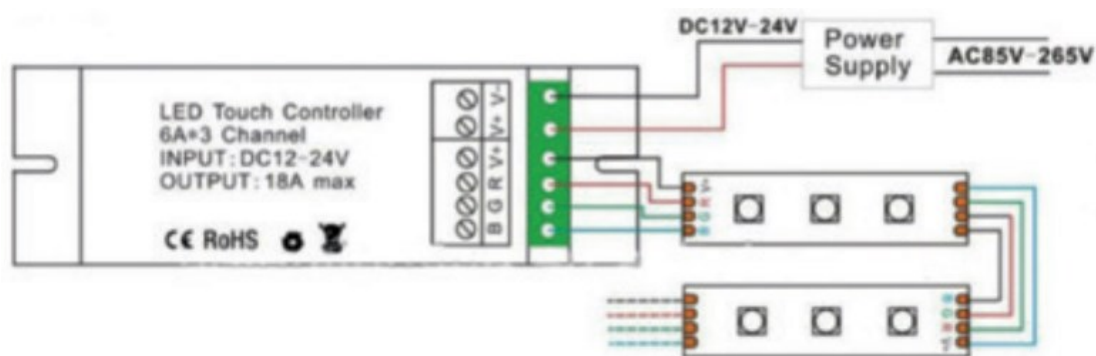

IMPORTER: Prima Group 2004 LTD, Bulgaria, 1784 Sofia, Mladost 1, bl. 144, Ground Floor; Phone: +359 2 988 45 72;

Documents / Resources

	OPTONICA 6314 6 Key LED Touch Controller [pdf] User Manual 6314, 6315, 6314 6 Key LED Touch Controller, 6 Key LED Touch Controller, LED Touch Controller, Touch Controller, Controller
--	--