

PAPIFEED 4NBSU1FU Rechargeable Automatic Cat Feeder with App User Manual

Home » PAPIFEED » PAPIFEED 4NBSU1FU Rechargeable Automatic Cat Feeder with App User Manual

PAPIFEED 4NBSU1FU Rechargeable Automatic Cat Feeder with App



Contents

- 1 Safety Instructions
- 2 Warranty
- 3 Specifications
- 4 In the Box
- **5 Product Overview**
- 6 Installation
- 7 Buttons
- **8 Indicator Description**
- 9 Tutorial Video
- 10 Install the APP & Log In
- 11 Add the Device
- **12 Function Introduction**
- 13 Cleaning & Care
- **14 FAQ**
- 15 Reference for Meal & Portion

Settings

- 16 100% After Sales Service
- 17 Documents / Resources
 - 17.1 References

&	Dispose of all packaging materials properly. Some items may be packed in plastic bags; these bags could cause suffocation. Keep them away from children and pets
E	Do not immerse the base part in water at any time as it may damage electronic components like the contro I panel.
(③)	Suggest following the instruction in this user manual to assemble or disassemble the feeder.
	Only use accessories recommended or sold by the manufacturer. The use of accessories not recommended or sold by the manufacturer may cause an unsafe condition.
	Examine the feeder after installation. Do not plug in if there is water on the power cable or plug
	This product uses one Li-Po Battery as a backup power supply. We recommend to use double power supply to ensure the normal use of the product.
	Check the battery regularly. If do not use the battery for a long time, please take out it in advance
*	Do not put your fingers into the food outlet or let your fingers touch the rotor.
	Keep the feeder close to your router, make sure the network signal is good, it is ideal to make it within 5 m eters without obstacles and walls. Depending on the coverage of the router you are using)
	Please do not use wet, canned or moist food; only put dry food into the food tank prevent from abnormal conditions even may including pet safety problems.

Warranty

- 1-Year Warranty
- Lifetime Support

For guidance on product use and warranty extension, please contact our brand after-sales staff via email: [service@papifeed.cn] or call us at (1) 877-290-0617 (From Monday to Friday: 8 a.m.-5 p.m.)(PST) If any questions related to orders, please contact the seller through the shopping platform.

Specifications


Product Name	Smart Pet Feeder(2.4G/5G WiFi)		
Suit For	Cat, Dog, Rabbit, Squirrel, Small Pets		
Power	D1 Cx L5iV-PPooBwaetrteArdyapter,		
Power Adapter	AC 100-240V Input, DC 5V Output		
Rated Power	5W		
Material	Eco-Friendly ABS		
Product Size	277*181*287mm/10.9*7.1*11.3in		
Product Weight	1.15kg/2.54lb		
Product Capacity	4L/17Gup		
Pet Food	Dry Food		
Portion Size	A(Vbaoruiets1d5uge/0t.o03dlebnOsintye of portent food)		

In the Box


• Lid *1




• Food Tank *1



• Stainless Steel Feeding Bowl *1

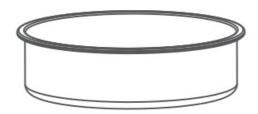


• Feeder Base *1

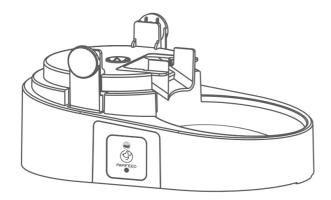


• Desiccant*1




• Desiccant Compartment *1



• Power Adapter *1




• USB Cable *1



• User Manual *1




Product Overview

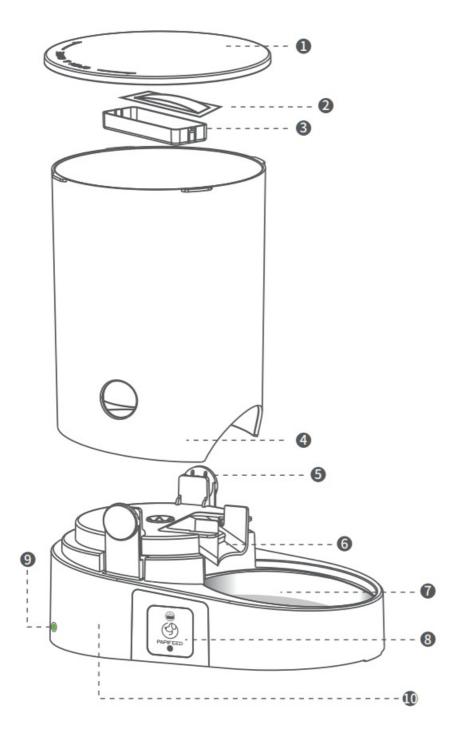


Installation

Step 1 Connecting Power

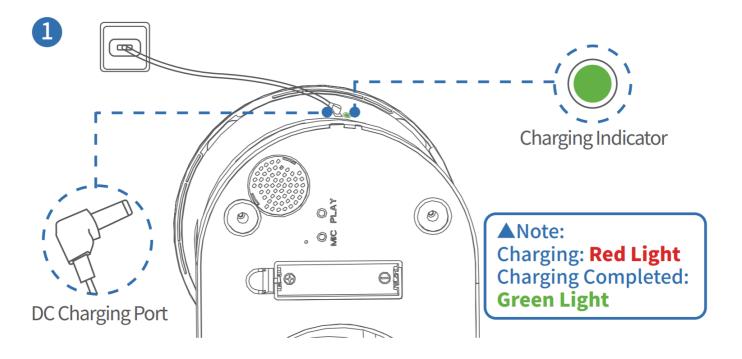


- Insert the 5V power adapter into the socket, plug in power cable of the feeder.
- Open the battery compartment at the bottom of the unit. Make sure there is a built-in Li-Po Battery(dual power supply is recommended for simultaneous use).

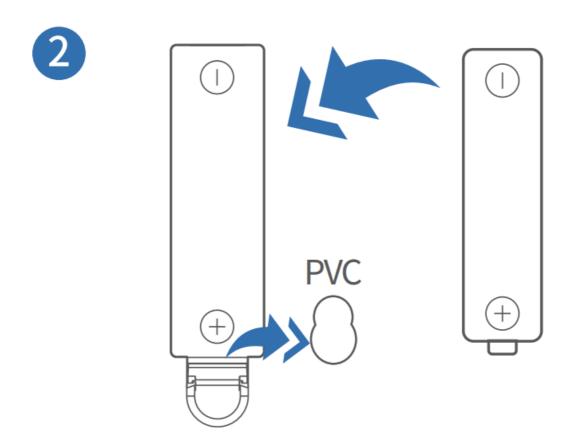

▲ **Note:** Please pull out the PVC sheet in advance.


• Check whether the positive and negative battery terminals are correct as shown in the figure

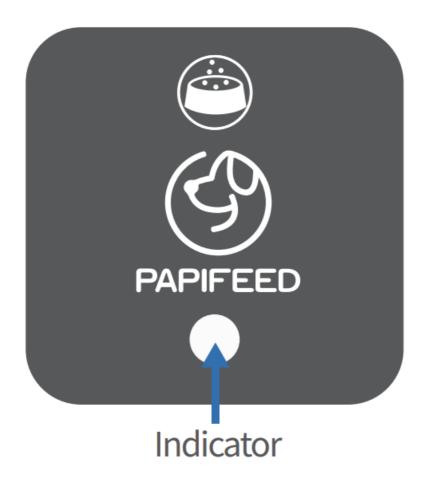


• When the indicator stays solid blue, it means that the device is using plug-in power and has been on.

Step 2 Filling Food Tank



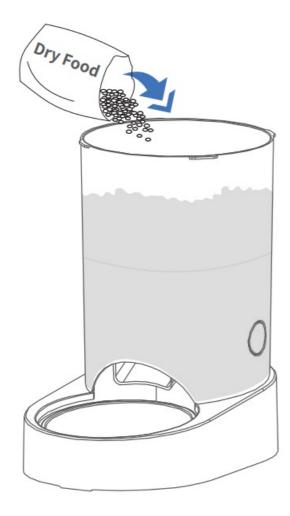


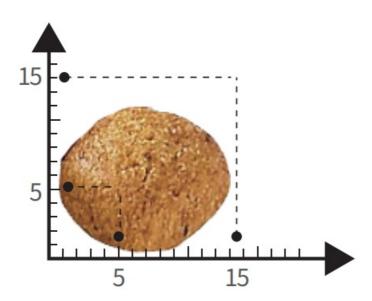


• Fill food tank with dry pet food.

Note

- 1. Please fill food tank with dry pet food, and do not use canned, wet or moist pet food.
- 2. Recommended food size:15mm/ 0.2-0.59in in diameter.

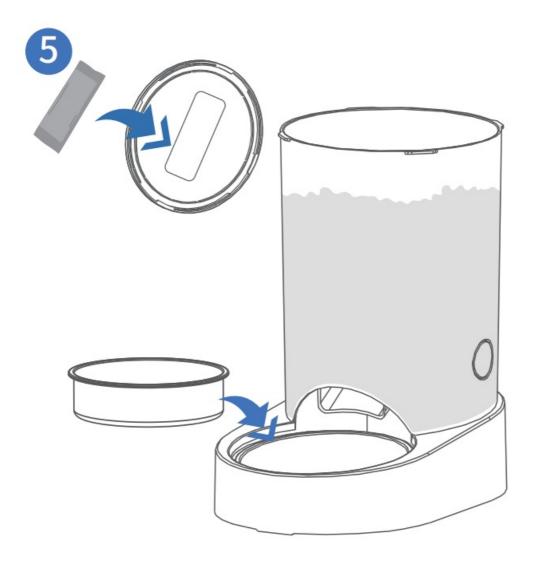


- Make sure that the desiccant is in the desiccant compartment.
- Place the stainless steel feeding bowl.

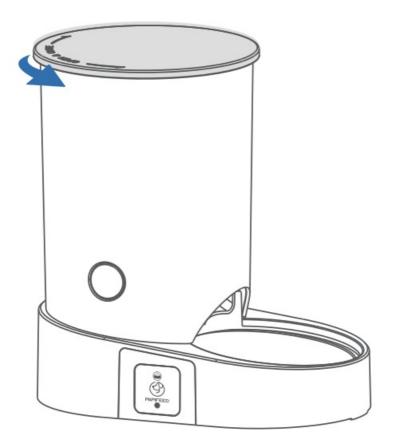

• Put the lid on top and turn clockwise to tight it.

Buttons

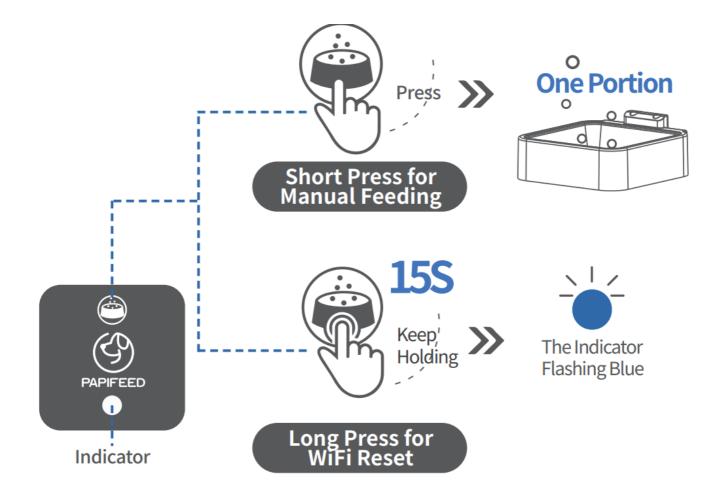

Indicator Description

Indicator	Status	
Blue Light Blinking	WiFi Pending Connection	
Blue Light	WiFi Connected	
Green Light	WiFi Disconnected	
Red Light (No Commands Within Two Minutes	Low Battery Sleep-screen Mode (Li-Po Battery Supp ly Only)	

Note:

When the indicator is blinking blue, the device is ready to connect WiFi. Please note that once start and during pairing, the indicator light is green. After the connection is successful, the green light turns to blue. At this time, the device is connected successfully

Tutorial Video

• You can scan the Tutorial Video QR code to watch how to connect.



Tutorial Video

Install the APP & Log In

App Installation

Download and install the "Smart Life" App by scanning the QR code, or searching it on Google Play (Android)/ App Store (ios).



Smart Life

Sign up and log in

After opening the app, if you don't have an account, please register one. If you have already have, please log in directly.


Add the Device





- 1. Make sure you have already turned the bluetooth and WiFi on before you try to connect the device.
- 2. One device can be attached to only one account at a time, but when you share your control in the app, the device can be controlled by multiple phones.

Add and Connect the Feeder

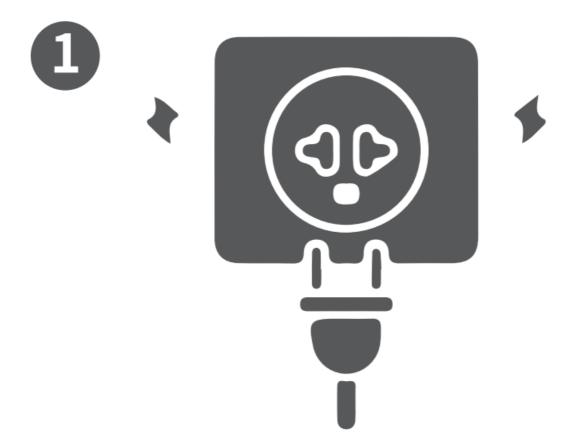

Connect and turn the power on




When the indicator is blinking blue, it means the device is ready to connect WiFi.




If the indicator is not blinking blue, please long press the button for 15 seconds to reset the device.

Please open the Smart Life APP \rightarrow Tap the [+] in the upper right corner to add the device.

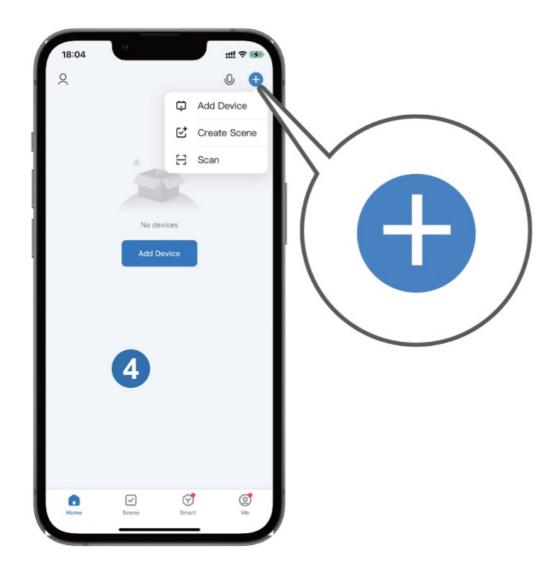



The feeder enters the pending connection state (the indicator light flashing blue), please follow the app prompts to operate.


Method One

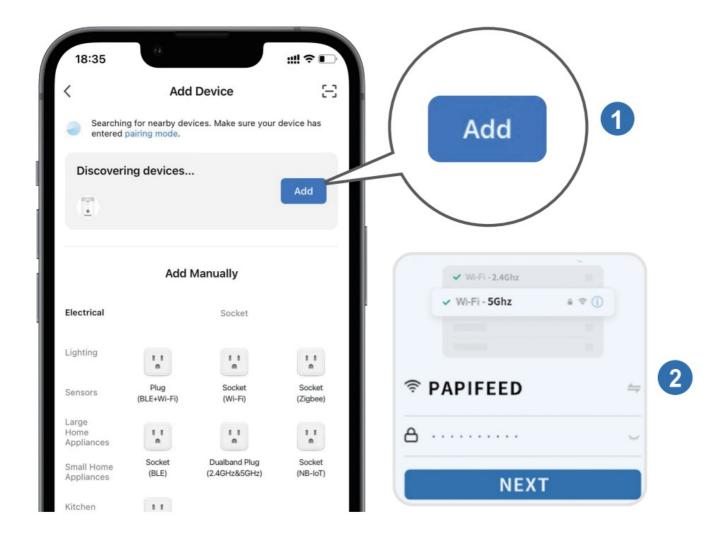

Method Two

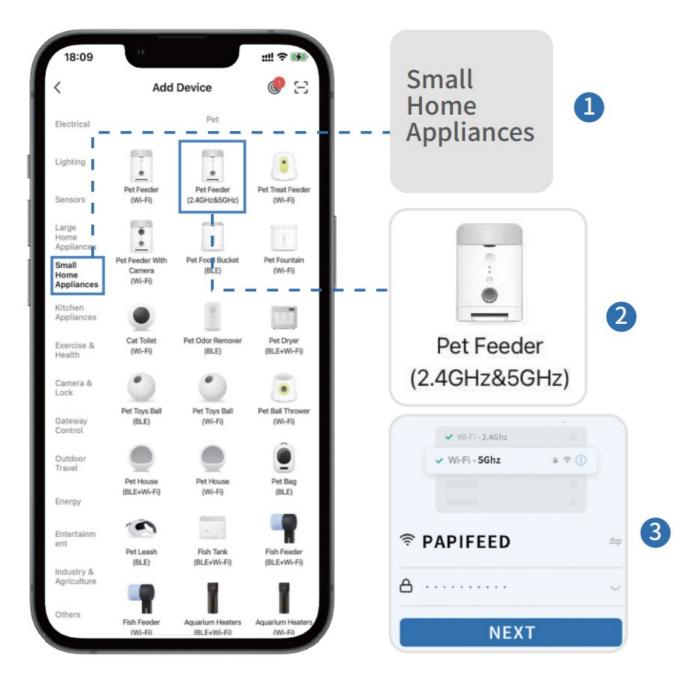

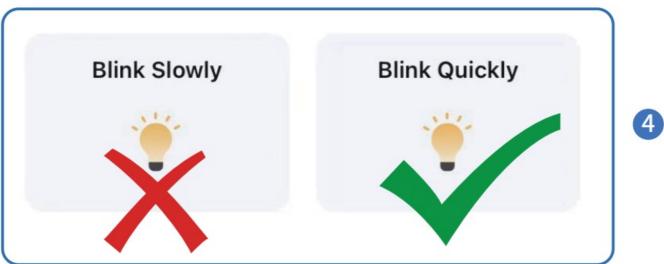

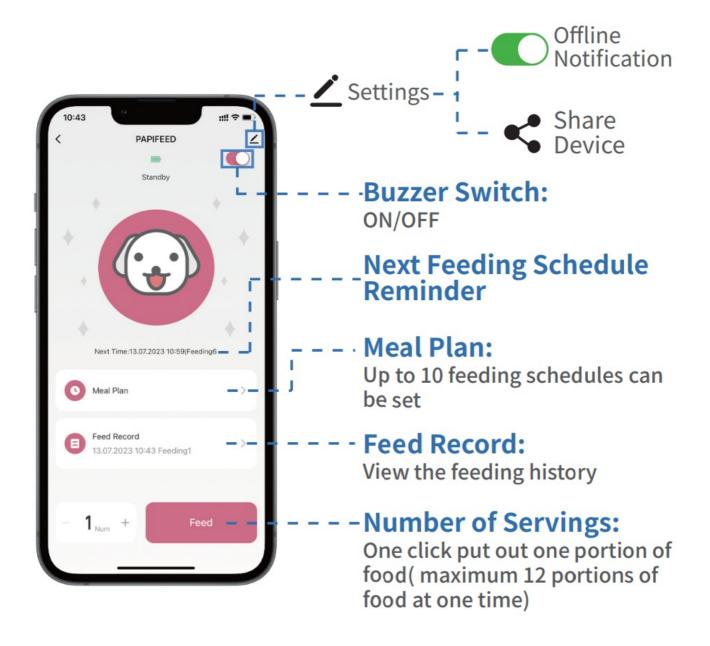




After the external power supply is disconnected, the device's built-in battery will be powered for use. At this time, the used feeding schedule will continue. However, when using battery power only, it can't tap to feed within the app, adjust the buzzer switch, or set up a feeding schedule, so that dual power supply is recommend.


Cleaning & Care


We recommend to clean the feeder regularly for the health of your pet. The washable parts of the feeder are as follows: lid, desiccant compartment, food tank, stainless steel feeding bowl.

Washable Parts

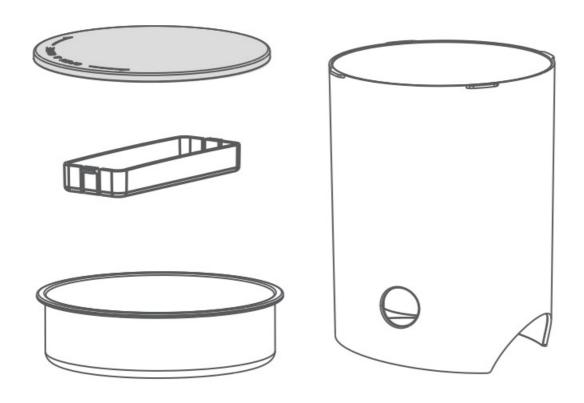


Do Not Wash

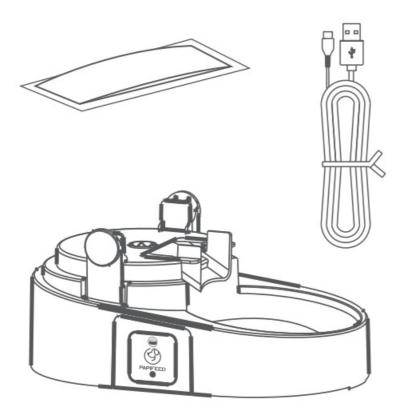





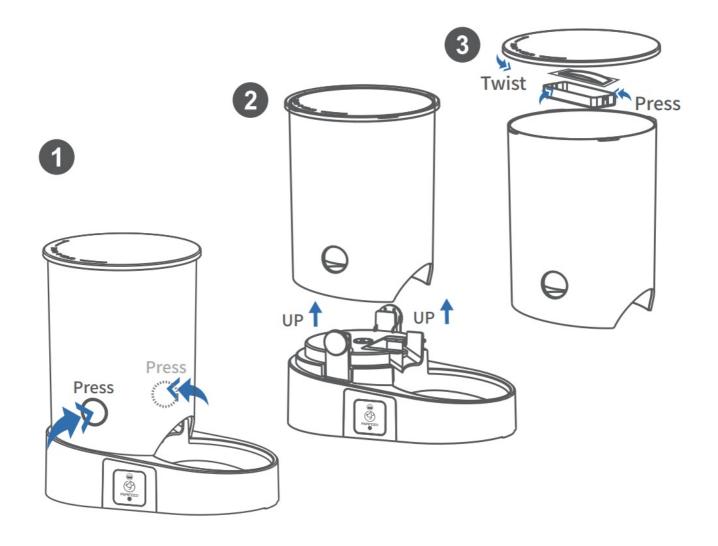

FAQ

Problem Solution		
	1) Keep the feeder and your phone close to your router, make su re the network signal 1s good.	
	2) Reset the feeder and reconnect.	
Can't connect the feeder to WiFi	3} Follow the APP 's instructions or our tutorial video to add the f eeder. There are more than one adding methods to choose from.	
	4) When powered only by the battery (indicator li this green), WiF i connection is not possible. P ease plug in power cable of the fe eder.	
	5) Contact our after-sales team via email for help.	
WiFi connection is sporadic	1) Keep the feeder close to your router, make sure the network si gnal is good, it is ideal to make it within 5 meters without obstacles and walls.(Depending on the coverage of the router yo u are using).	
	2) Make sure the power cord is ropery connected, the indicator lights oldie blue at this point.	
	3) Reset the feeder and reconnect.	
Indicator light off	1) On battery power only, the indicator light will go off if there is n o any command wit in two minutes.	
· ·	2) No power supply whatsoever.	
Does the feeder dispense food when it is offline?	When offline and on battery power only, the feeding schedule will continue to feed according to the previous settings.	
	1) To check if the food tank got enough food.	
Why feed on the APP but no food dispensing from the feeder?	2) If the impellers have been rotated normally.(You can judge from the sound).	
	3} Suggest to feed again for few more times to avoid the signal d elay(internet delay) cause for the troubles.	

Problem	Solution
	1) Make sure the feeder is not reset or powered off.
	2) Check if the feeder is offline, when normally connected, the fe eder indicator is always on blue.
Timed tasks are not executed correctly	3) Check whether the effective period of the timing task is set cor rectly.
	4) Check whether the time zone of the device is the same as yo
	ur time zone. Online status, click – Settings, check the time z one of the device.
	5) Reset the feeder and reconnect.
The feeder has disappeared from the home	1) Make sure the feeder is successfully networked, the indicator li ght should be blue.
page	2) Make sure the feeder is not connected by someone else, it is r ecommended to reset the feeder and connect it.

Reference for Meal & Portion Settings



- 1. Below is the recommended amount of food your pet needs by each meal.
- 2. One portion of this feeder is about 15g/0.03lb.

If the pet fail to eat up the previous programmed meal, please reduce the next meal portion.

-CAT-

Age (Months)	1-2	2-4	4-6	6-8	8-12
Suggested	Feed	20-30g	30-S0g	50-70g	70-B0g
80-90g	Weight	(Months)	Weight	(Months)	3-Skg
5-7kg	Pregnancy	Lactation	Period	Suggested	Feed
25-3Sg	35-SSg	55-3Sg	70-11 0g	120-190gl	120-190gl

DOG

Dog Weight	Normal Activity	Increased Activity
2kg	39g	45g
4kg	66g	76g
6kg	89g	104g
8kg	111g	128g
10kg	131g	152g
12kg	150g	174g

14kg	178g	206g	235g
16kg	197g	.!2Bg	259g
18kg	197g	228g	259g
20KG	233g	270g	30g

Dog weight	Normal Activity	Increased Activity	Vigorous Activity
22kg	250g	290g	329g
24kg	267g	309g	351g
26kg	274g	318g	361g
28kg	290g	336g	381g
30kg	305g	353g	402g
32kg	320g	371g	422g
34kg	335g	3B8g	441g
36kg	350g	405g	461g
38kg	349g	422g	480g
40kg	379k	439g	496g

100% After Sales Service

We provide one year warranty for this appliance.

Please email our support team at [service@papifeed.cn], if you have any questions, attach your order number and describe the problem you met in your email. We will get back to you within 24 hours.

Also you can call us at (1) 877-290-0617 (From Monday to Friday: 8 a.m.-5 p.m.)(PST)



Documents / Resources



PAPIFEED 4NBSU1FU Rechargeable Automatic Cat Feeder with App. [pdf] User Manual 4NBSU1FU, 4NBSU1FU Rechargeable Automatic Cat Feeder with App, Rechargeable Automatic Cat Feeder with App, Cat Feeder with App, Feeder with App, App

References

- Home Papifeed Pet Supply Official Site
- User Manual

Manuals+, Privacy Policy

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.