



Phocos 2023 Any Grid Series Hybrid Inverter User Guide

[Home](#) » [phocos](#) » Phocos 2023 Any Grid Series Hybrid Inverter User Guide 



Product Selection Guide
2023



www.phocos.com

Contents

- 1 Your Off-Grid & Any-Grid Partner
- 2 Rely on Phocas
- 3 Phocos in an Any-Grid™ System
- 4 Any-Grid™ Hybrid Inverter Chargers
- 5 Any-Grid™ Battery Inverter Chargers
- 6 Any-Grid Inverter Portfolio
- 7 Any-Cell™ LFP-Energy Storage System
- 8 Charge Controller Portfolio
- 9 Documents / Resources

Your Off-Grid & Any-Grid Partner

Industry Experts

Two decades of experience as a leading provider of reliable, innovative energy solutions has earned Phocos continuous respect from the solar industry. We have proudly grown from being 'Your Off-Grid Partner' to 'Your Any-Grid Partner' as we expand our product offering to meet more energy access challenges in the global market today.

Global Leader, Local Partner

With our headquarters in Ulm, Germany, we operate four sales, support and R&D subsidiaries and have a network of dependable distributors worldwide. Our commitment to local service and support anywhere in the world makes Phocos much more than a supplier of components and solutions for off-grid systems. It makes us "Your Off-Grid and Any-Grid Partner."

Rely on Phocas

	Innovative Leading in advanced technologies for clean, reliable and affordable energy.		Cost-Effective Optimizing features-to-cost ratio to minimize the total cost of ownership.
	Reliable Setting industry standards in first-class quality and superior reliability.		Flexible Providing power products with the flexibility to build optimal Off-Grid, On-Grid or Any-Grid installations.

Any-Grid™ Applications

Our innovative technologies are used in homes, businesses and industry. Phocos offers a variety of products to support a broad range of Off-Grid, On-Grid and Any-Grid solar power applications.



Residential & Rural Electrification

High-quality energy solutions for locations and populations without access to reliable grid power

Your Off-Grid & Any-Grid Partner



Seamless Reliable Power Anywhere, Anytime, Any-Grid



Recreation

Supporting clean, sustainable living on the road, on the water or off the beaten path



Solar Lighting


Rugged, efficient and dependable solutions with advanced lighting controls



Industry

Reliable industrial power for remote monitoring, oil & gas, traffic signals, security and telecom towers

Phocos in an Any-Grid™ System

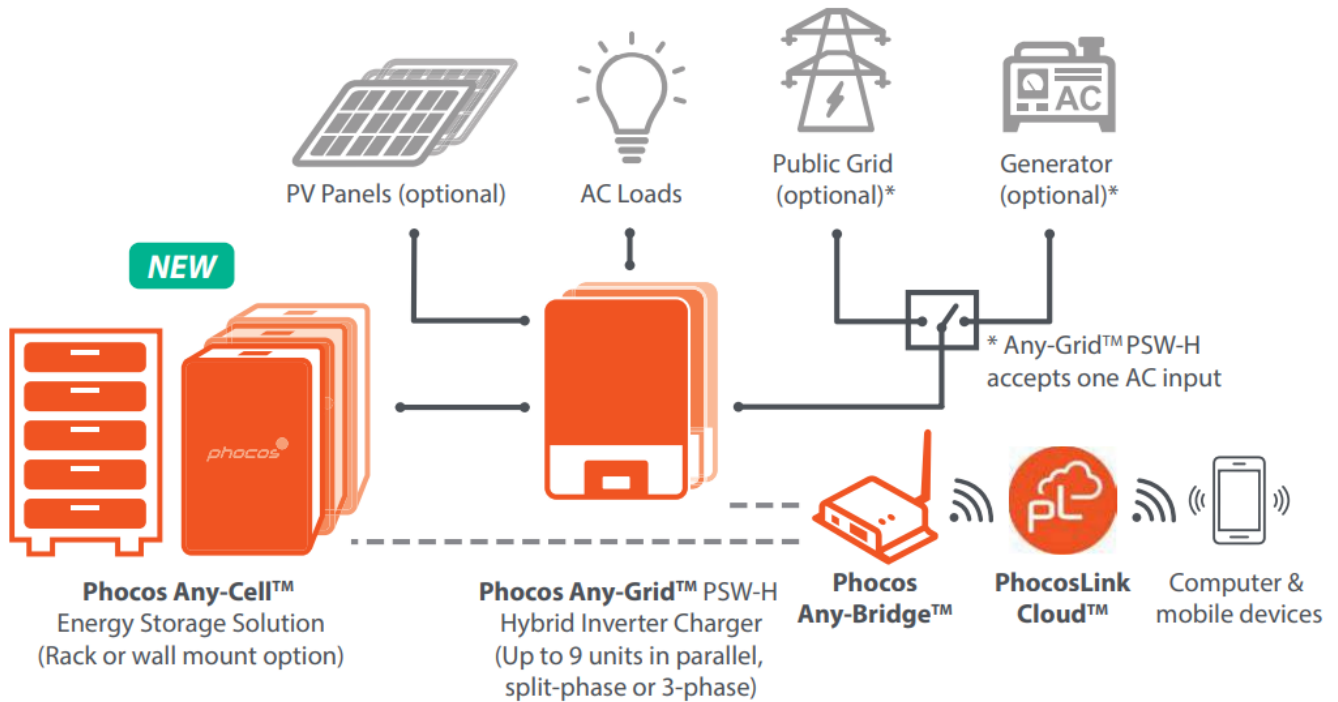

Any-Grid™ Hybrid Inverter Chargers

Any-Grid™ PSW-H Hybrid Inverter Chargers

The Phocos Any-Grid PSW-H Inverter Charger Series (Pure Sine Wave Hybrid) represents Phocos' most versatile line of inverters/chargers. Flexibility and reliability are key characteristics of this product line, with a strong potential for cost saving opportunities in real world conditions. The Any-Grid PSW-H combines the functionality of an MPPT solar charge controller, inverter, uninterruptible power supply (UPS) and AC battery charger into a single, easy-to-use and simple to install unit. It acts as a power hub to manage multiple energy sources. Models available in 230 and 120 Vac.



Any-Grid PSW-H

Product Features

- 3 kW, 5 kW, 6.5 kW or 8 kW output power per model, with integrated AC battery charger
- Integrated high-voltage 80 A MPPT charge controller
- Charge controller can function even if inverter is turned off to keep batteries fully charged
- Compatible with Lithium batteries
- Detachable display / communication unit with 6 LEDs and an intuitive LCD screen
- High level of connectivity: BLE, USB-OTG (on-the-go), CAN Bus, RS-485, RS-232, relay for generator start
- Up to 9 units connectable in parallel, split-phase or 3-phase for 85.5 kW of synchronized AC power
- Datalogger with up to 60 days of data storage
- Uninterruptible power supply functionality due to 10 ms switching time (typical, UPS mode) in case of grid blackout



Any-Grid™ Battery Inverter Chargers

Any-Grid™ PSW-B Battery Inverter Charger

- 0.5 kW, 1 kW, 1.6 kW or 3 kW output power per model
- Flexible, advanced features with options to solve many common challenges in the field
- Integrated MPPT charge controller and AC battery charger
- Charge controller functions even if inverter is turned off to keep batteries fully charged
- Compatible with Lithium batteries
- Display unit with 3 LEDs, 3/4 buttons, and an intuitive LCD screen
- RS-232 and USB connectivity
- Common negative and galvanically isolated inverter



Any-Grid PSW-B

Any-Grid PSW-B Series is the most cost-effective entry point to all-in-one inverter chargers

Power Connections:

• Solar/PV	• Battery
• AC Source	• AC Output

Any-Grid Inverter Portfolio



Max. Power Ratings			Battery Voltage			Features							
Model	Rated Power	Surge Power (for 5 secs.)	12 V	24 V	48 V	AC Output Voltage	AC Charge Current	MPPT Charge Current	Max. PV Voltage	MPPT Qty.	No Load Power Draw	Battery-Free Mode	Common Terminal (for grounding)
PSW-H: Hybrid Inverter Charger													
PSW-H-3KW-230/24V	3,000 W	6,000 W		•		220~240 Vac	80 A	80 A	450 Vdc	1	<40 W	•	Isolated
PSW-H-5KW-230/48V	5,000 W	10,000 W			•	220~240 Vac	80 A	80 A	450 Vdc	1	<40 W	•	Isolated
PSW-H-8KW-230/48V	8,000 W	16,000 W			•	220~240 Vac	120 A	120 A	500 Vdc	2	< 75 W	•	Isolated
PSW-H-3KW-120/24V	3,000 W	6,000 W		•		110~127 Vac	80 A	80 A	250 Vdc	1	<40 W	•	Isolated
PSW-H-5KW-120/48V	5,000 W	10,000 W			•	110~127 Vac	80 A	80 A	250 Vdc	2	<58 W	•	Isolated
PSW-H-6.5KW-120/48V	6,500 W	13,000 W			•	110~127 Vac	120 A	120 A	250 Vdc	2	<58 W	•	Isolated
PSW-B: Battery Inverter Charger													
PSW-B-0.5KW-120/12V	500 W	1,000 W	•			110~127 Vac	20 A	40 A	100 Vdc	1	<15 W		Isolated
PSW-B-1.6KW-120/24V	1,600 W	3,200 W		•		110~127 Vac	60 A	60 A	145 Vdc	1	<37 W		Isolated
PSW-B-1KW-230/12V	1,000 W	2,000 W	•			110~240 Vac	20 A	40 A	100 Vdc	1	<15 W		Isolated
PSW-B-3KW-230/24V	3,000 W	6,000 W		•		110~240 Vac	60 A	60 A	145 Vdc	1	<37W		Isolated

Remote System Monitoring Available using the Any-Grid PSW-H and Phocos Any-Bridge AB-PLC-CAN

Any-Cell™ LFP-Energy Storage System

NEW

What is Any-Cell™ ?



The Phocos Any-Cell is a compact and modular Lithium energy storage system that complements the Any-Grid™ hybrid inverter series to allow energy to be stored on site regardless of charging resources available. Combining Phocos Any-Cell energy storage with Any-Grid hybrid inverters and Any-Bridge remote monitoring provide seamless integration between power conversion and energy storage while optimizing the use of locally available energy resources. Any-Cell represents the latest in Phocos innovation, showcasing our commitment to provide flexible energy access solutions Anywhere, Anytime, Any-Grid.

ESS-L-5kWh-48V

Product Features

- Seamless integration with Phocos Any-Grid portfolio
- Safe, maintenance-free, LiFePO₄ / LFP Chemistry
- Advanced Battery Management System
- Compact, high efficiency form factor
- Modular, scalable up to 8 batteries in parallel
- Wall or Rack mount
- High efficiency and low resistance
- High charge / discharge rate
- Greater than 6,000 cycles @90% DoD



Any-Cell ESS-L

Technical Data

Type	ESS-L-SkWh-48V
Chemistry	LiFePO4 / LFP
System Voltage	48 Vdc
Capacity (kWh)	5.12 kWh
Capacity (Ah)	100 Ah
Cycle Life (@ 25 °C)	> 6,000 Cycles @ 90% DoD
Mounting	Wall or rack mount (wall mount hardware included)
Certifications	UL 1642, UL1973, IEC 62619, UN38.3, CE, RoHS
Weight	56 kg / 123.5 lbs
Dimensions (WxHxD)	440 x 595 x 172 +/-2 mm / 17.3 x 23.4 x 6.8 in (without bracket)
Warranty	10 years

Any-Cell provides seamless integration between Phocos power conversion products and energy storage

www.phocos.com

Charge Controller Portfolio

Optimizing Energy from PV Arrays

Our MPPT (Maximum Power Point Tracking) and PWM (Pulse Width Modulation) solar charge controllers are designed with an optimal feature-to-cost ratio to minimize total cost of ownership of the off-grid system.

Our models offer these advantages:

- CML: Designed for rural electrification and mobile device charging
- ECO: Compact size and economical choice for low-power industrial applications
- CXN: Advanced features and intelligence for industry and lighting applications
- CIS: Built for the harshest environments with advanced lighting control features

MPPT Solar Charge Controllers

Max Solar Ratings				Battery Voltage				Features						
Model	Current	Voltage	Power	12V	24V	36V	48V	Potted	Data Logging	Low Voltage Disconnect	Grounding	Lighting Control	Dimming	LED Driver
ECO: Compact size and economical choice for low-power industrial applications														
ECO-N-MPPT 85/15	15A	85 Voc	250W/500W	•	•			•	•	•	NEG			
CIS: Built for the harshest environments with advanced lighting control features														
CIS-N-MPPT 85/15	15A	85 Voc	225W/450W	•	•			•	•	•	NEG	•	•	
CIS-N-MPPT 100/30	30A	95 Voc	450W/900W	•	•			•	•	•	NEG	•	•	
CIS-N-MPPT-LED	15A	85 Voc	225W/450W	•	•			•	•	•	NEG	•	•	•

PWM Solar Charge Controllers

Max Solar Ratings				Battery Voltage				Features								
Model	Current	Voltage	Power	12V	24V	36V	48V	Potted	LCD	USB Charger	Data Logging	Low Voltage Disconnect	Grounding	Lighting Control	Dimming	LED Driver
CML: Designed for rural electrification and mobile device charging																
CM04	4A	30V	70W	●									POS			
CM10	10A	30V	175W	●									POS			
CML-USB-10	10A	30V/50V	175W/350W	●	●					●		●	POS			
CML-USB-20	20A	30V/50V	350W/700W	●	●					●		●	POS			
ECO-N: Compact size and economical choice for low-power industrial applications																
ECO-N-10	10A	30V/50V	175W/350W	●				●				●	NEG			
ECO-N-10-T	10A	30V/50V	175W/350W	●	●			●				●	NEG			
ECO-N-20-T	20A	30V/50V	350W/700W	●	●			●				●	NEG			
CXN: Advanced features and intelligence for industry and lighting applications																
CXNup-10	10A	30V/50V	175W/350W	●	●				●	●	●	●	NEG	●		
CXNup-20	20A	30V/50V	350W/700W	●	●				●	●	●	●	NEG	●		
CXNup-40	40A	30V/50V	700W/1050W	●	●				●	●	●	●	NEG	●		
CIS: Built for the harshest environments with advanced lighting control features																
CIS-N-10	10A	30V/50V	175W/350W	●	●			●				●	NEG	●	●	
CIS-N-20	20A	30V/50V	350W/700W	●	●			●				●	NEG	●	●	
CIS-N-LED-1050	20A	30V/50V	350W/700W	●	●			●				●	NEG	●	●	●
CIS-N-LED-1400	20A	30V/50V	350W/700W	●	●			●				●	NEG	●	●	●
CIS-N-LED-2800	20A	30V/50V	350W/700W	●	●			●				●	NEG	●	●	●

Phocos Group



Americas USA

EMEA Germany

SAARC India

APAC China

<p>Phocos Americas, Inc. 325 S. Euclid Ave., Ste. 101 Tucson, AZ 85719 USA Phone +1 520 777-7906 info.na@phocos.com www.phocos.com</p>	<p>Phocos AG Magirus-Deutz-Str. 12 89077 Ulm Germany Phone +49 731 9380688-0 Fax +49 731 9380688-50 info@phocos.com www.phocos.com</p>	<p>Phocos India Solar Pvt Ltd. Plot No. 201 – 203, 231 & 233 AR Nivas, Navayuga Nagar Pattannur, Vanur TK, Villupuram – 605 111 Tamil Nadu, India Phone +91 (0) 413 2972328 info-india@phocos.com www.phocos.com</p>	<p>Phocos China Ltd. Room 1304, Qingdao International Shipping Center, No.66 Lianyungang Road, Qingdao 266034, China Phone +86 532 83837020 info-china@phocos.com www.phocos.com</p>
--	---	---	---



Version: 2023-05-08

Subject to change without notice

Documents / Resources

	<p>Phocos 2023 Any Grid Series Hybrid Inverter [pdf] User Guide 2023 Any Grid Series Hybrid Inverter, 2023, Any Grid Series Hybrid Inverter, Series Hybrid Inverter, Hybrid Inverter, Inverter</p>
--	--