

PYLE
PPHP1244B Powered
Bluetooth Speaker



Pyle PPHP1244B Powered Bluetooth Speaker User Manual

[Home](#) » [Pyle PPHP1244B](#) » Pyle PPHP1244B Powered Bluetooth Speaker User Manual 

PYLE








Pyle PPHP1244B Powered Bluetooth Speaker



Wireless BT Streaming Indoor / Outdoor Loudspeaker

with Built-in Rechargeable Battery, Flashing Party Lights, MP3/USB/SD Readers, FM Radio (800 Watt)

WARNING

-  DO NOT place objects on top of the device, as objects may scratch the device.
-  DO NOT expose the device to dirty or dusty environments.
-  DO NOT insert any foreign objects into the device.
-  DO NOT expose the device to a strong magnetic or electrical field.
-  DO NOT use the device in the rain
-  Please check with your Local Authority or retailer for proper disposal of electronic products.
-  DO NOT disassemble the device. Only a certified service technician should perform the repair.




8. The device has apertures to disperse heat. DO NOT block the device ventilation, the device may become hot and malfunction as a result.

The illegal operation may cause personal injury, which could be fatal, and may cause property damage.

FEATURES OF THE MACHINE


- This system can be used with personal computers, mobile phones, VCDs, CDs, LD, TV, MP3, radio, electronic pianos, and any devices that have audio output.
- Amplifier circuits use high-performance, high-fidelity design, coupled with high-quality professional speakers, to make the sound field positioned so clearly, with distinct levels of effect.
- The sound system is outstanding, with deep and powerful bass and the treble effect is strong, with clear and bright pitch.
- The professional electronic frequency division circuit enhances the machine's crossover point effect.
- Using professional design and manufacture of high-capacity batteries, and dedicated audio power capacitors, to make the speaker's power reserve margin larger, more stable, better dynamics, and higher signal-to-noise ratio.

BACK PANEL FUNCTIONS

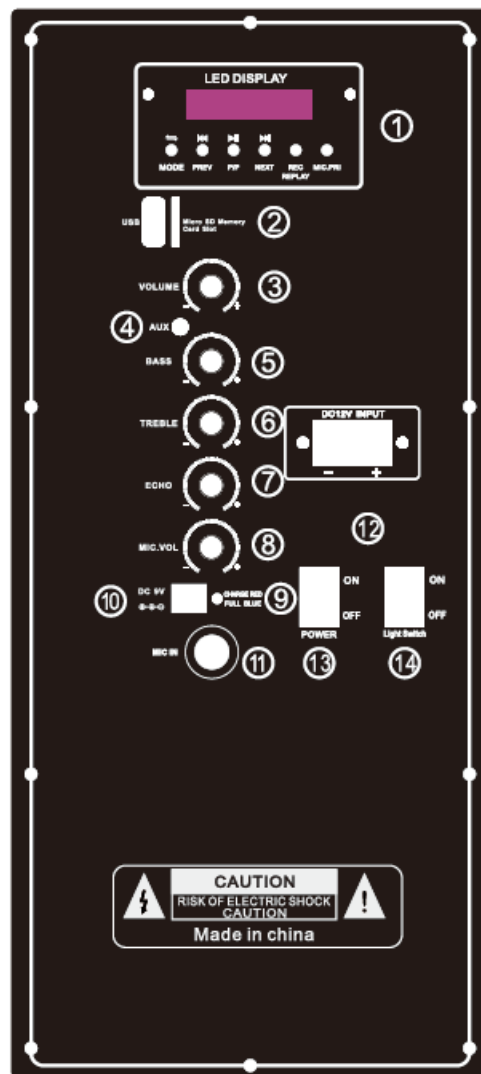

1. USB Control board
2. USB and Micro SD Memory Card input jack
3. Master volume control knob
4. 3.5MM AUX input jack
5. Bass volume control knob
6. Treble volume control knob
7. Echo volume control knob
8. Microphone volume control knob
9. Charge LED indicator, red color is charging mode, blue color is full charge.
10. DC 9V input jack
11. 6.5MM microphone input jack
12. Extra DC 12V input
13. Power switch
14. LED light switch

REMOTE CONTROL FUNCTIONS

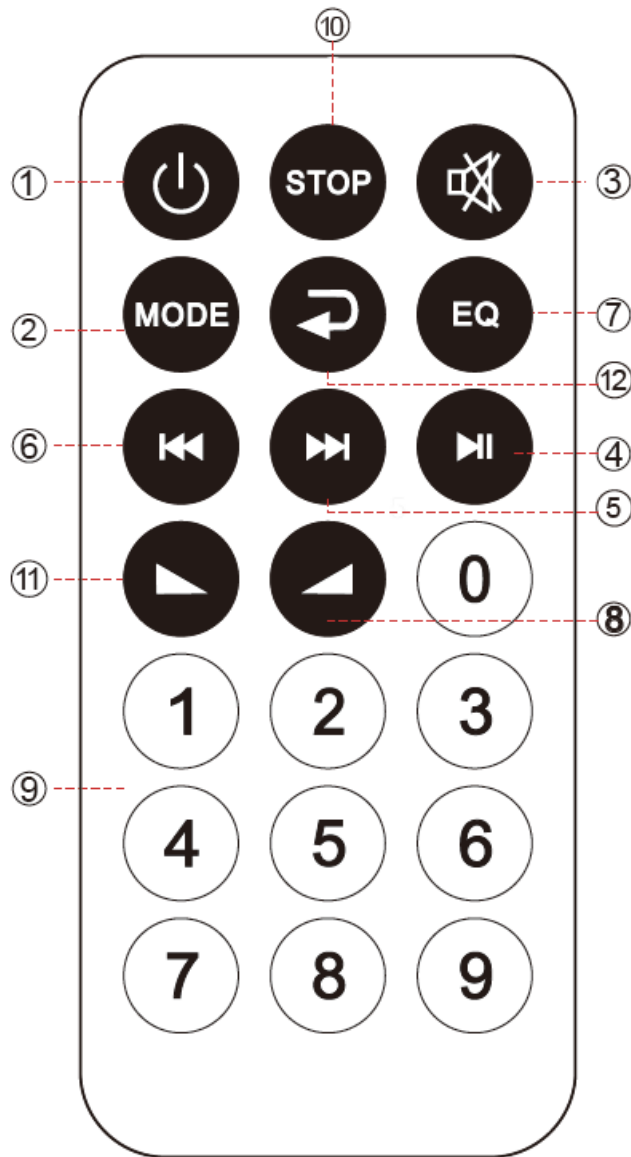

1. Standby button
2. Choose input AUX/FM/BT/USB signal
3. Mute button
4. Play/Stop button onMP33 mode, scan function on FM mode
5. Next song of USB/Micro SD Memory Card, next channel of FM mode
6. Previous song of USB/Micro SD Memory Card, last channel of FM mode
7. EQ effect on Mp3 mode
8. Increase speaker volume
9. Choose the one directly on MP3 mode
10. Stop button
11. Decrease music volume
12. Repeat the song on a USB/Micro SD Memory Card

TROUBLESHOOTING

Fault	Possible Cause	Solution
No sound	<ol style="list-style-type: none"> 1. No input sound source. 2. Volume is too low. 	<ol style="list-style-type: none"> 1. Use a better music signal. 2. Adjust volume.
Distortion of sound	<ol style="list-style-type: none"> 1. Volume too high. 2. Speaker may be damaged 	<ol style="list-style-type: none"> 1. Turn down the volume. 2. If the speaker is damaged, repair or replace it.
Karaoke does not work	<ol style="list-style-type: none"> 1. The microphone plug is not fully inserted. 2. The microphone switch is not on. 3. Microphone volume knob is at the lowest position. 	<ol style="list-style-type: none"> 1. Plug the microphone properly into the socket. 2. Turn on the microphone switch. 3. Adjust the microphone volume properly.
MP3 does not play	<ol style="list-style-type: none"> 1. The audio format in the U disc is incorrect. 2. Improper operation has caused a process disorder. 3. The USB disc is disconnected. 	<ol style="list-style-type: none"> 1. Convert audio format into MP3 format. 2. Reboot the machine. 3. Insert the USB disc properly.

BUILT-IN WIRELESS BT STREAMING FUNCTION

- Press the “MODE” button to choose the input signal source as the BT channel when starting the machine.
- Please ensure the BT devices you want to connect are open. Then scan and connect the speaker to the device. When the connection is successful, a “tick” tone will prompt. If the speaker can’t be connected, please restart the speaker or the device and try again.
- After the mobile phone and the BT are successfully connected, you can play music. To ensure continuous stability of the music signal, try to keep the BT and the mobile phone facing one another.
- This unit supports iPad, iPhone, Samsung, HTC, MOTOROLA, Nokia, and other BT mobile devices wirelessly transmitting audio. It supports stereo playing of A2DP.
- The BT of the unit can be used up to 10 meters if there are no barriers.

PPHP1244B

Wireless BT Streaming Indoor / Outdoor Loudspeaker with Built-in Rechargeable Battery, Flashing Party Lights, MP3/USB/SD Readers, FM Radio (800 Watt)

Features:

- Portable & High-Powered Speaker System
- Rugged & Compact Speaker Designed for Portability
- Bluetooth Wireless Music Streaming Ability
- Multi-Color Flashing LED Party Lights
- Flashing LED Lights Bounce & Pulse to the Music Beat
- FM Radio with Digital Display

- Built-in Rechargeable Battery
- Recording Function
- Microphone Priority 'Talk-Over' Button
- Connect & Stream Audio from External Devices
- USB Flash Reader & Micro SD Card Reader
- MP3 Digital Audio File Support
- Aux (3.5mm) Input
- 1/4" -inch Microphone Input
- Rear Panel Button Control Center
- Mic Volume, Treble, Bass, Echo Adjustment
- Telescoping Handle & Rolling Caster Wheels
- For Indoor / Outdoor Use
- *Optional Power via DC 12V Input

Bluetooth Connectivity:

- Built-in Bluetooth for Wireless Music Streaming
- Simple & Hassle-Free Pairing
- Works with All of Today's Latest Devices (Smartphones, Tablets, Laptops, Computers, etc.)
- **Bluetooth Version:** 4.0
- **Bluetooth Network Name:** 'PYLEUSA'
- **Wireless Range:** Up to 32 ft.

What's in the Box:

- PA Speaker System
- Remote Control
- Power Adapter

Technical Specs:

- **Power Output:** 800 Watt MAX
- **Sound System:** 12" Subwoofer + 1" Tweeter
- **Impedance:** 4 Ohm
- **Frequency Response:** 55-20kHz
- **S/N Ratio:** 60dB +/-3dB
- **SPL:** 94dB (1W/M)
- **T.H.D.:** <1%
- **USB Interface Type:** 2.0
- **Digital Media File Compatibility:** MP3
- **Maximum USB Flash Drive Support:** Up to 16GB
- **LED Lights:** ON / OFF
- PA Speaker Rechargeable Battery 7.4V Li-iOn, 2200mAh – 16.2Wh
- Battery Powered Remote, Requires (1) x 'CR-2025', Included

- **Power Supply:** 110/240V (9V Power Adapter)
- **Total Speaker Size (L x W x H):** 12.5" x 13.7" x 20.4" -inches

VISIT US ONLINE:

- Have a question?
- Need service or repair?
- Want to leave a comment?
- [PyleUSA.com](https://www.pyleusa.com)
- [PyleUSA.com/ContactUs](https://www.pyleusa.com/contact-us)

FREQUENTLY ASKED QUESTIONS

What is the power output of the Pyle PPHP1244B Powered Bluetooth Speaker?

The Pyle PPHP1244B Powered Bluetooth Speaker delivers a maximum output of 800 watts peak power. This high power ensures that you can enjoy loud, clear sound for your music or events, whether indoors or outdoors.

What type of subwoofer and tweeter does the Pyle PPHP1244B Powered Bluetooth Speaker use?

The Pyle PPHP1244B Powered Bluetooth Speaker is equipped with a 12-inch subwoofer and a 1-inch tweeter, providing a balanced audio experience with deep bass and clear high frequencies for a full-range sound.

How many input options are available on the Pyle PPHP1244B Powered Bluetooth Speaker?

The Pyle PPHP1244B Powered Bluetooth Speaker offers 4 input options: a USB flash drive, an SD card reader (for MP3 playback), a 3.5mm AUX input, and a ¼ inch microphone input, making it versatile for different audio sources and karaoke setups.

What special feature does the Pyle PPHP1244B Powered Bluetooth Speaker have for parties?

The Pyle PPHP1244B Powered Bluetooth Speaker features flashing LED party lights that pulse and bounce to the beat of the music. These colorful lights can be controlled using the remote, creating an exciting and dynamic atmosphere for any party.

What is the size of the Pyle PPHP1244B Powered Bluetooth Speaker?

The Pyle PPHP1244B Powered Bluetooth Speaker is compact enough for portability but still powerful enough to deliver high-quality sound. Its 12-inch subwoofer and full-range system make it suitable for both personal and professional use, from home parties to larger outdoor events.

The Pyle PPHP1244B Powered Bluetooth Speaker is not turning on. What should I check first?

Ensure that the Pyle PPHP1244B speaker is properly plugged into a working electrical outlet. Check the power switch and make sure it's turned on. If the speaker still doesn't power up, verify that the power cable is intact and properly connected. If the issue persists, the internal fuse might need replacement, and you should contact Pyle customer support.

The Bluetooth connection on the Pyle PPHP1244B Powered Bluetooth Speaker is not working. What can I do?

Make sure Bluetooth is enabled on your device and that it is within range of the speaker. Try turning off and then turning on both the Bluetooth on your device and the speaker. If the speaker is still not connecting, ensure that the speaker is not connected to another device, and if necessary, reset the Bluetooth connection by turning off the speaker and restarting the pairing process.

DOWNLOAD THE PDF LINK: [Pyle PPHP1244B Powered Bluetooth Speaker User Manual](#)

References

- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.