



PYLE PL26BSL Dual Subwoofer Box System User Guide

[Home](#) » [Pyle](#) » PYLE PL26BSL Dual Subwoofer Box System User Guide 



PL26BSL Dual Subwoofer Box System User Guide

Contents


- [1 PL26BSL Dual Subwoofer Box System](#)
- [2 Features](#)
- [3 What's in the Box:](#)
- [4 Technical Specs](#)
- [5 Documents / Resources](#)
 - [5.1 References](#)
- [6 Related Posts](#)

PL26BSL Dual Subwoofer Box System




WIRING CONNECTION

Power amplifier for schematic diagram.

Connect the power amplifier to the positive and negative terminals accordingly as shown.

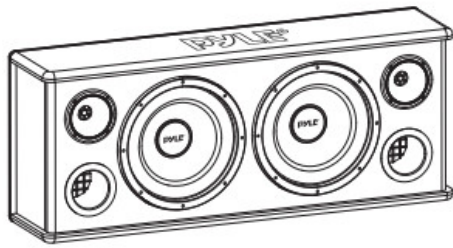

4 Ω + - + - 4 Ω

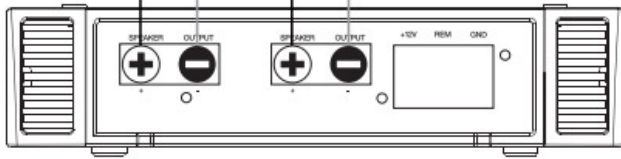

Features

- Rear Vented Design
- Rubber Edge Suspension
- Two 4" Tweeters
- Smooth Carpet Finish
- 4 Layer Dual Voice Coil
- Binding Post Connectors
- Perfect for Truck and Behind the Seat
- High-Quality Construction

What's in the Box:

- Subwoofer Box

Questions? Issues?

We are here to help!

Phone: (1) 718-535-1800

Email: support@pyleusa.com

PL26BSL


6" Dual Series Vented Subwoofer Enclosure

Rear Vented Design with Built-in Illuminating LED Lights

Technical Specs

- Construction Materials: 15mm Particle Board + Multilayer Board
- Power Rating: 2 x 200 Watts Max Power
- Voice Coil: 1.0"

- Impedance: 4 Ohms
- Magnet: 2 x 20 Oz
- Sensitivity: 90 dB
- Frequency Response: 65-18000 Hz
- Product Dimensions (L x W x H): 20.5" x 4.7" x 8.5" -inches

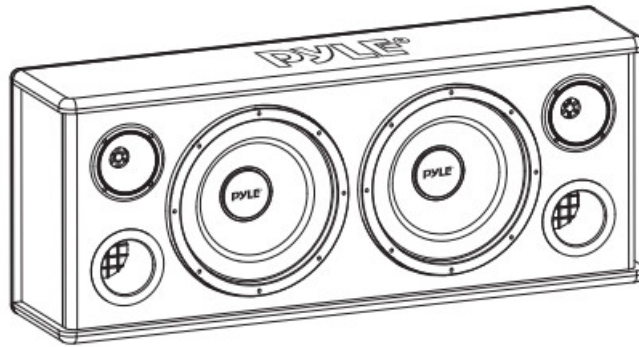

PL28BSL

8" Dual Series Vented Subwoofer Enclosure

Rear Vented Design with Built-in Illuminating LED Lights

Technical Specs:

- Construction Materials: 15mm Particle Board + Multilayer Board
- Power Rating: 2 x 300 Watts Max Power
- Voice Coil: 1.5"
- Impedance: 4 Ohms
- Magnet: 2 x 24 Oz
- Sensitivity: 91 dB
- Frequency Response: 50-18000 Hz
- Product Dimensions (L x W x H): 27.5" x 6.3" x 11.0" -inches



PL210BSL

10" Dual Series Vented Subwoofer Enclosure

Rear Vented Design with Built-in Illuminating LED Lights

Technical Specs:

- Construction Materials: 15mm Particle Board + Multilayer Board
- Power Rating: 2 x 400 Watts Max Power
- Voice Coil: 2.0"
- Impedance: 4 Ohms
- Magnet: 2 x 30 Oz
- Sensitivity: 91 dB
- Frequency Response: 40-18000 Hz
- Product Dimensions (L x W x H): 29.9" x 7.0" x 13.0" -inches





WARNING:

This product contains Nickel carbonate which is known to the state of California to cause cancer birth defects and other reproductive harm. Do not ingest.

For more info go to: www.P65warnings.ca.gov

Documents / Resources

	<p>PYLE PL26BSL Dual Subwoofer Box System [pdf] User Guide PL26BSL, PL28BSL, PL210BSL, Dual Subwoofer Box System, PL26BSL Dual Subwoofer Box System, Subwoofer Box System, Box System</p>
	<p>PYLE PL26BSL Dual Subwoofer Box System [pdf] User Guide PL26BSL, PL28BSL, PL210BSL, Dual Subwoofer Box System, PL26BSL Dual Subwoofer Box System, Subwoofer Box System, Box System</p>

References

- [P Pyle USA Electronics | Home Audio | Car Audio & More](#)