

PYLE Portable Wireless BT PA Loudspeaker System PPHP152BMU User Manual

Home » Pyle » PYLE Portable Wireless BT PA Loudspeaker System PPHP152BMU User Manual



PYLE PPHP152BMU Portable Wireless BT PA Loudspeaker System User Manual



Built-in Rechargeable Battery, MP3/USB/SD Readers, FM Radio, 15" Subwoofer, 1000 Watt

We recommend that you read this manual carefully so that you can fully take advantage of the advanced and convenient functions of the Portable PA Speaker and Microphone System. We also recommend that you keep this manual in a safe and handy place for future reference.

1

CAUTION

WARNING! DON'T OPEN THE MACHINE TO AVOID ELECTRIC SHOCK, PLEASE ASK HELP FROM PROFESSIONAL TECHNICIANS.



SAFETY INSTRUCTION

- 1. Read this manual carefully before using. Retain for future reference.
- 2. All warnings on the speaker and in the operating instructions should be adhered to.
- 3. Do not use this apparatus near water.
- 4. Do not block any of the ventilation openings. Install in accordance with the manufacturers instructions. Do not install near any heat sources such as radiators, heat registers, stoves, or other apparatus (including amplifiers) that produce heat. Do not install the speaker in an airtight location.
- 5. Protect the power cord from being walked on or pinched particularly at plugs, convenience receptacles, and the point where they exit from the apparatus.
- 6. Switch OFF and unplug then use a soft cloth to clean the exterior of the unit if it becomes dirty. If necessary, use a damp cloth that has been wrung out well to wipe it.
- 7. Unplug this apparatus during lightning storms or when unused for long periods of time.
- 8. Keep foreign objects and liquid from entering the unit to avoid a short circuit, fire and electrical accidents.
- 9. Place the speaker in a dry location.
- 10. Refer all servicing to qualified service personnel. Servicing is required when the apparatus has been damaged in any way, such as power-supply cord or plug is damaged, liquid has been spilled or objects have fallen into the apparatus, the apparatus has been exposed to rain or moisture, does not operate normally, or has been dropped.

Control & Layout

Front Panel & System

- 1. SD Card Input
- 2. Screen
- 3. EQ Selectors
- 4. Remote Control Receiving Window
- 5. Input Selectors
- 6. Repeat Control
- 7. EQ Switch
- 8. Line-in (AUX) Input
- 9. Audio Output Jack
- 10. DC Input Jack
- 11. FM Antenna
- 12. Voltage Selector Swicth
- 13. Power Switch
- 14. USB Input
- 15. Play/Pause Control
- 16. Next Song/Volume Up
- 17. Previous Song/Volume Down
- 18. Full Voltage Indicator
- 19. Volume Control
- 20. Charge Indicator
- 21. Mic Input Jack
- 22. Mic Priority Switch
- 23. Mic Volume Control
- 24. Echo Control
- 25. Guitar Volume Control
- 26. Guitar Input Jack
- 27. AC Input Jack


FM Radio

- 1. Turn ON the unit.
- 2. Press Mode selector, set to Radio mode;
- 3. You can use FM selector choose for FM;
- 4. When you use the radio for the first time, press Scan once, unit will auto search and store radio stations, then you can use *PRE/NEXT* to select the stored radio stations.
- 5. You can also use the *PRE/NEXT* buttons to manual search for radio stations.
- 6. You can use the six numbers located on top panel to store your favorite radio stations.

NOTES:

FM reception maybe different in locations, for better reception quality, please use the Antenna and keep unit far from any electrical distortions.



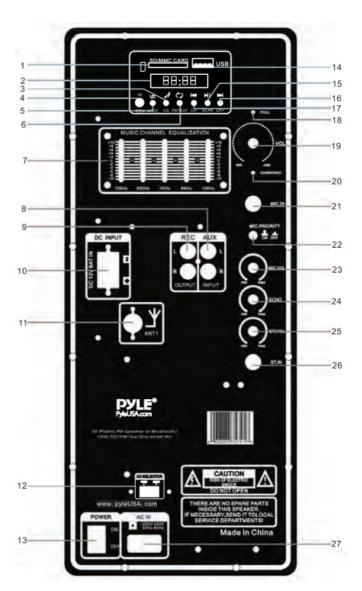

You can play music from USB stick or SD Card using the USB/SD slot on the PA speaker.

- 1. Turn ON the unit.
- 2. Insert your USB or SD card into the slot.
- 3. Once inserted the USB or SD card unit will automatically play.
- 4. You can use the PRE/NEXT/PLAY/PAUSE to control and play music.

NOTES:

The speaker system can play the following audio le formats: MP3, MP4, WMA. The USB/SD Card max size is 32GB. Operation may be slower when searching large memory les. It will need several seconds to respond when your USB/SD Card full of contents.

Wireless BT Playback

You can connect your Wireless BT phone or other device to the PA speaker.

- 1. Turn **ON** the unit.
- 2. Press the **INPUT** button which is located on top control panel.
- 3. The BT is **ON** when you hear two tone indicator sound.
- 4. Use your Wireless BT phone or other device to search for the Wireless BT name " PYLE SPEAKER".
- 5. Select the "PYLE SPEAKER" Wireless BT name and wait for the device to pair automatically.
- 6. You do not need password and get connected with unit.
- 7. You can use the **VOLUME/BASS/TREBLE** to adjust the sound level for Wireless BT, also you can adjust the Wireless BT music sound through your own phone or other device.

NOTES:

Check the volume controller both on the unit and on your phone or other device if there is no sound through the PA speaker during Wireless BT.

Use of External Power

To use the PA speaker longer than the Internal battery life, you can connect the PA speaker to a external 12V Battery Source.

- 1. Find the INPUT DC 12V on the top control panel.
- 2. Use the correct cable to connect the INPUT DC 12V.

NOTES:

The PA speaker will consume the internal battery first, when it is low, the LOW BATTERY indicator light located on the control panel will turn on, you can use the external 12V battery to power on the unit. The external 12V battery will also charge the internal battery while in use.

System Features

Portable PA Loudspeaker

- · Built-in BT for Wireless Music Streaming
- Sound System: 15" Subwoofer and 5" Tweeter
- USB Flash and SD Memory Card Readers
- 5 Band Music Channel EQ with Blue LEDs
- Touch Button Audio Controls
- · Digital Display Screen with FM Radio
- · Displays Song Number and Play Time
- · Auto Scan and Store for Radio Stations
- Built-in Rechargeable Battery
- Battery Life up to 3 Hours, Non-Stop Play
- 1/4" Microphone and Guitar Input Connector Jacks
- RCA (L/R) Input and Output Connector Jacks
- Master, Mic, Echo, Guitar Volume Controls
- Retractable Handles and Caster Wheels for Easy Transport
- · Heavy Duty Handles for Portability
- Rugged, Durable and Reliable Housing

What's in the Box

- PA Speaker System
- · Handheld Microphone
- · Remote Control
- Audio Connection Cables
- Power Cable

Wireless BT Connectivity

- · Built-in Wireless BT Music Streaming
- Works with All of Your Favorite Devices
 (iPhone, Android, Smartphone, iPad, Tablet, Computer, etc.)
- · Wireless BT Network Name: Pyle Speaker
- Wireless BT Range: Over 65'+ ft.

Technical Specs

• Maximum Power Output: 1000 Watts

• RMS Power Output: 500 Watt @ 4 Ohm

· Battery: 7.5 Amp

· Average Charge Time: 8 Hours

• Max. USB/SD Card Size: 32GB

MP3 File Compatibility

Molded Speaker Cabinet Material: Engineered ABS

• DC 12V Input

• Power: 110/220 Voltage Selector

• Magnet: 40 Oz.

• Tweeter Type: Piezo

• Impedance: 4 Ohm

· Sensitivity: 90 dB

• T.H.D.: 10%

Frequency Response: 20-20kHzCrossover Frequency: 3.5kHz





Documents / Resources



PYLE Portable Wireless BT PA Loudspeaker System PPHP152BMU [pdf] User Manual PYLE, Portable, Wireless, BT, PA, Loudspeaker System, PPHP152BMU, Built-in Rechargeable Battery, MP3, USB, SD Readers, FM Radio, 15, Subwoofer, 1000 Watt

Manuals+,