

PYLE
PPHP1548B
Portable Wireless
BT Subwoofer
System



PYLE PPHP1548B Portable Wireless BT Subwoofer System User Guide

[Home](#) » [Pyle](#) » PYLE PPHP1548B Portable Wireless BT Subwoofer System User Guide 

PYLE

PYLE PPHP1548B Portable Wireless BT Subwoofer System



READ ALL INSTRUCTIONS CAREFULLY BEFORE USING THIS PRODUCT. RETAIN THIS OWNER'S MANUAL FOR FUTURE REFERENCE.

Features

- True Wireless Stereo Speaker System
- Loudspeaker Studio-Tested Design
- Built-in BT for Wireless Music Streaming
- Built-in Rechargeable Battery
- Sound System: 15" Subwoofer and Piezo Driver
- Digital Display Screen with FM Radio
- USB Flash and SD Memory Card Readers
- MP3 Digital Audio File Playback
- Touch Button Audio Controls
- 1/4" Audio Inputs for Microphone
- Master, Mic, Echo, Volume Settings
- Auto Scan and Store for Radio Stations

- Rugged & Heavy-Duty Molded Cabinet Housing
- Carry Handles and Caster Wheels for Easy Transport
- 35mm Speaker Stand Mountable Insert

Bluetooth Connectivity

- Wireless Music Streaming Capability
- Quick & Hassle-Free Device Pairing
- Works with All of Your Favorite Wireless BT-Enabled Devices (Smartphones, Tablets, Laptops, Computers, etc.)
- Wireless BT Network Name: 'PYLE SPEAKER'
- Wireless BT Version: 5.0

What's In The Box

- PA Speaker System
- Wired Handheld Microphone
- Remote Control
- Speaker Stand
- 5V/2A Type-C Cable (USB Cable)

Speaker Stand

- 3.8 ft Speaker Stand Holder Mount
- Quick and Easy Telescoping Height Adjustment
- Height Adjustable: 31.5" – 45.6" inches
- Locking Safety Pin for Secure Placement
- Rugged and Durable Metal Construction
- Reinforced 35mm (1.375") Engineered Tubing
- Conveniently Folds for Storage & Transport
- Knob-Style Tension Locking Mechanism
- Maximum Speaker Weight Load Capacity: Up to 110 lbs.
- Perfect for On-Stage or In-Studio Use

Technical Specs

- Power Output: 1000 Watts MAX
- RMS Power Output: 20 Watts @ 4 Ohm
- MP3 Digital Audio File Compatibility
- Magnet: 20 Oz.
- Impedance: 4 Ohm
- Sensitivity: 90 dB
- T.H.D.: 10%
- Frequency Response: 20 Hz – 20 kHz

- Crossover Frequency: 3.5 kHz
- Max. USB/SD Card Size: 32GB
- Power Supply: 7.4V/1800 mAh Lithium-Ion
- Battery-Operated Remote Control Requires 3V Lithium Cell (CR2025)
- Molded Speaker Cabinet Material: Polypropylene
- Power: 120/240V, Voltage Selector
- Dimensions (L x W x H): 15.7" x 14.6" x 26.8" inches

California Prop 65 Warning



WARNING

This product may expose you to chemicals, which are known to the state of California to cause cancer, birth defects, and other reproductive harm. Do not ingest. For more info go to: www.P65warnings.ca.gov

WARNING!

CAUTION: TO REDUCE THE RISK OF ELECTRIC SHOCK, DO NOT REMOVE THE COVER OF THIS UNIT. THERE ARE NO USER-SERVICEABLE PARTS INSIDE. REFER ALL SERVICING TO A QUALIFIED TECHNICIAN.



The lightning flash with arrowhead symbol within an equilateral triangle is intended to alert the user to the presence of "dangerous" voltage within the product's enclosure that may be of sufficient magnitude to constitute a risk of electric shock to humans. Users should exhibit extra safety when this symbol appears in this instruction manual and follow all precautions as they are stated.



The exclamation point within an equilateral triangle is intended to alert the user to the presence of important operating and maintenance (servicing) instructions in this manual.

SAFETY INSTRUCTION


1. Please read the user manual carefully before use and retain it for future reference.
2. The power supply must match the demand of the device with a reliable ground wire.
3. All covering signals should comply with the demand of the device.
4. The device should be located far away from high temperatures, moisture, and powerful electromagnetic fields.
5. Maximum operating temperature is 113°F.
6. No naked flame sources, such as lighted candles, shall be placed on the product.
7. Clean only with a dry cloth. The appliance should be cleaned only as recommended by the manufacturer.
8. When not in use, unplug the unit from the mains.
9. To establish a safe level:
 - Start your volume control at a low setting.
 - Slowly increase the sound until you can hear it comfortably and clearly, without distortion.
10. Only use suitable means of transportation if you want to move the speaker.

Note

- Once the WIRELESS BT devices are paired, there is no need to pair them again.

- If the speaker is connected via BT device but does not play sound, please turn off nearby devices and only leave one device to reconnect with the speaker.
- When inserting the USB/SD Card, make sure the direction you select is correct. Never insert violently to avoid damaging the USB/SD Card or the unit. If it doesn't work, please check if the direction is correct.
- Turn off and remove the USB/SD Card before turning off the speaker.


CONTROLS AND CONNECTIONS

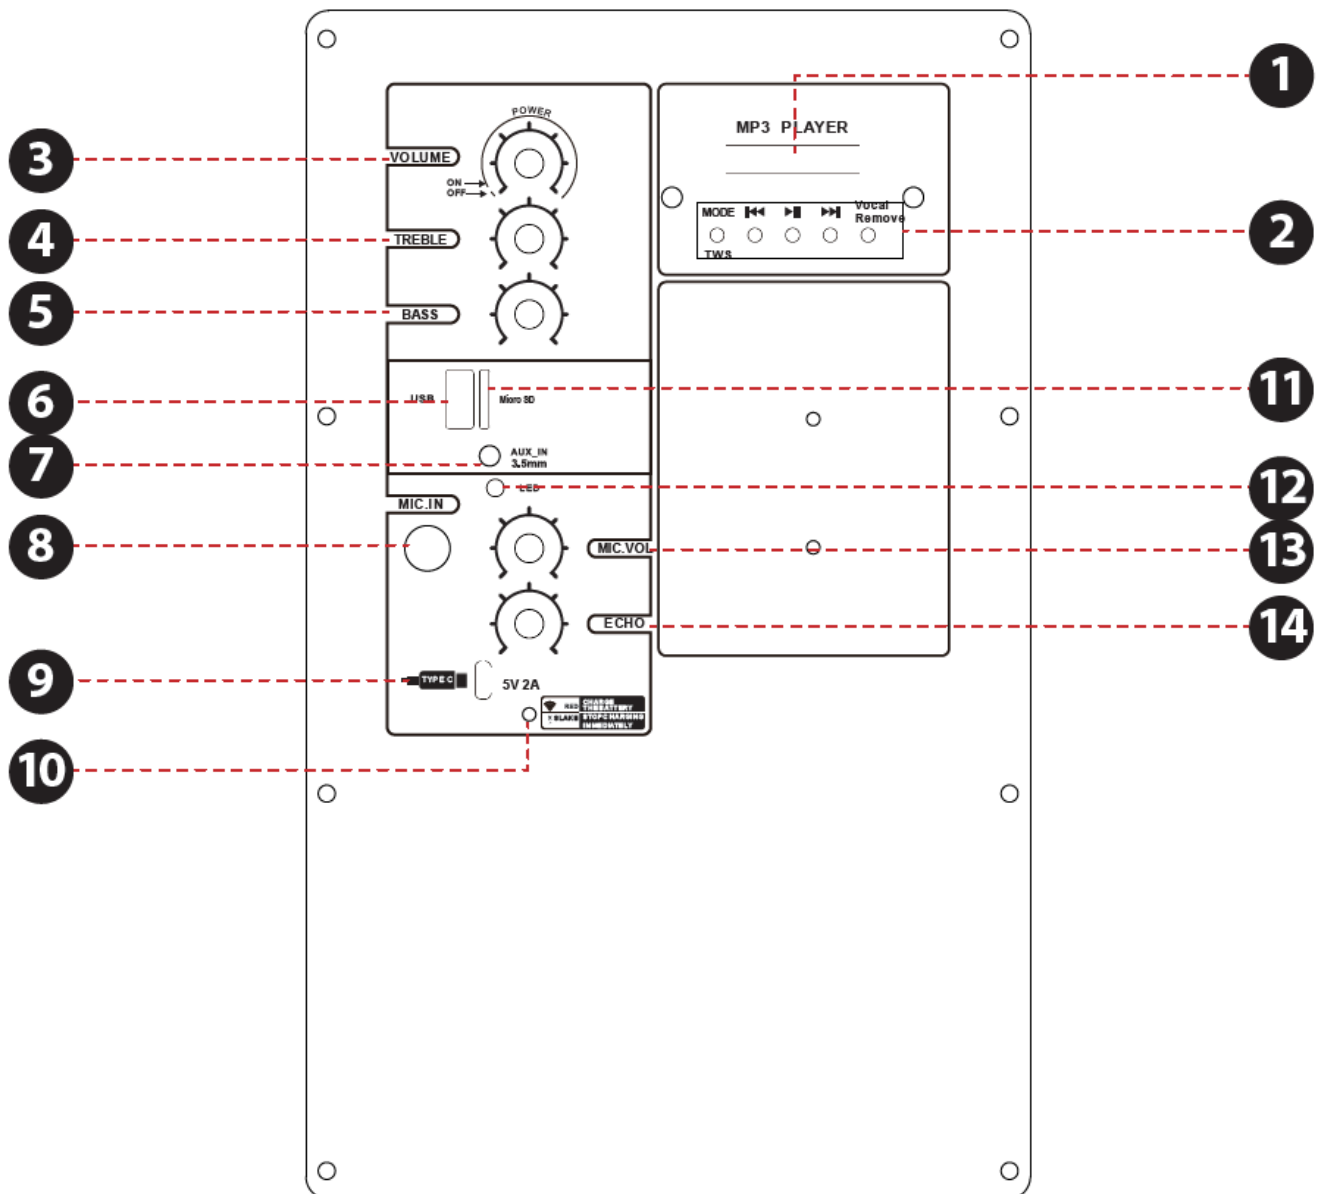



1. LED Screen
2. Function Buttons
3. MP3 Volume/Power Switch
4. Treble Control: Adjusts high frequencies.
5. Bass Control: Adjusts low frequencies.
6. USB Port
7. 3.5mm Line Input
8. Mic Input Jack
9. Type-C Charge Port

10. Charge LED
11. Micro SD Slot
12. LED Switch (ON/OFF)
13. Microphone Input Volume Control
14. ECHO Control

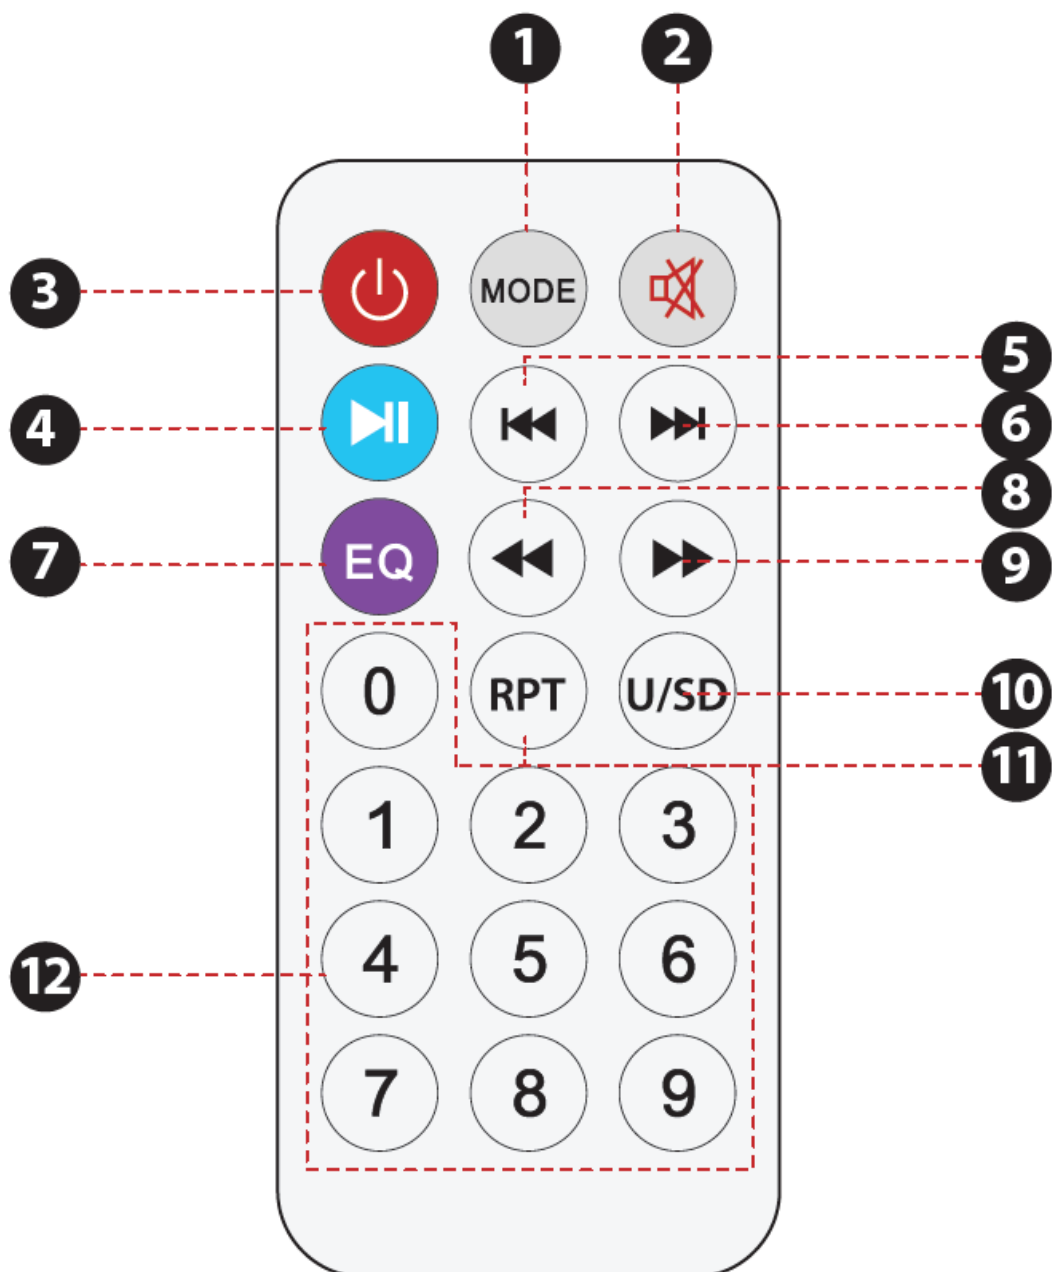REMOTE CONTROL



1. MODE: Switch between USB/Micro SD/BT/FM/Line In.
2. Mute: Mutes the audio.
3. Standby Mode
4.  Play/Pause
5.  Previous Track:

- USB/Micro SD: Plays the previous song.
- FM: Switches to the previous station.

6. **▶▶** Next Track:

- USB/Micro SD: Plays the next song.
- FM: Switches to the next station.

7. EQ: Selects preset equalizer settings (Normal, Bass, Pop, Rock, Classic, Jazz).

8. **◀◀** Rewind

9. **▶▶** Fast Forward

10. USB/Micro SD Control

11. SCAN: Press and hold to auto-search FM stations.

12. RPT: Toggles Random/Single/Order playback modes.

13. 0-9 Number Keys: Selects tracks directly by number.

FCC STATEMENT

WARNING: Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device under Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This unit generates, uses, and can radiate radio frequency energy, and if not installed and used by the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try and correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment to an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

1. This device may not cause harmful interference.
2. This device must accept any interference received, including interference that may cause undesired operation.

Register Product

Thank you for choosing PyleUSA. By registering your product, you ensure that you receive the full benefits of our exclusive warranty and personalized customer support. Complete the form to access expert support and to keep your PyleUSA purchase in perfect condition.

Start Here



PyleUSA.com/pages/register


Questions or Comments?

We are here to help! Phone: 1.718.535.1800

PyleUSA.com/ContactUs



Documents / Resources

	<p>PYLE PPHP1548B Portable Wireless BT Subwoofer System [pdf] User Guide PPHP1548B Portable Wireless BT Subwoofer System, PPHP1548B, Portable Wireless BT Subwoofer System, Wireless BT Subwoofer System, BT Subwoofer System, Subwoofer System</p>
-----------------------------------------------------------------------------------	-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

References

- P65warnings.ca.gov
- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.