



PYLE PPHP842B Wireless BT Portable PA Speaker User Manual

[Home](#) » [Pyle](#) » PYLE PPHP842B Wireless BT Portable PA Speaker User Manual 

PYLE
PyleUSA.com









PPHP842B – PPHP1042B – PPHP1242B – PPHP1542B
Wireless BT Portable PA Speaker
Portable PA & Karaoke Party Audio Speaker
with Built-in Rechargeable Battery, Flashing
Party Lights, MP3/USB/ /FM Radio
User Manual



PPHP842B

PPHP1042B - PPHP1242B - PPHP1542B

WARNING

	1. DO NOT place objects on top of the device, as objects may scratch the device.
	2. DO NOT expose the device to dirty or dusty environments.
	3. DO NOT insert any foreign objects into the device.
	4. DO NOT expose the device to a strong magnetic or electrical field.
	5. DO NOT use the device in the rain
	6. Please check with your Local Authority or retailer for proper disposal of electronic products.
	7. DO NOT disassemble the device. Only a certified service technician should perform the repair.
	8. The device has apertures to disperse heat. DO NOT block the device ventilation, the device may become hot and malfunction as a result.

The illegal operations may cause personal injury, which could be fatal and may cause damage to property.


PPHP842B CONTROL BOARD FUNCTIONS

1. Master volume control/Power switch
2. Charge LED indicator, red color is on charge mode, light off is full charge mode
3. Bass volume control knob
4. Treble volume control knob
5. 3.5MM AUX input jack
6. Microphone volume control knob
7. USB and Micro SD Memory Card Slot
8. 6.5MM microphone input jack
9. Microphone priority button

When playing the recorded file, press and hold to delete the current recording.

10. Short press to start recording and short press again to save and play recording Press and hold the press to play recording files, and press and hold again to quit recording
11. Next

12. Play/Pause/press and hold for TWS function
13. Previous
14. Short press to choose mode/Press and hold to turn ON/OFF light
15. Display screen
16. DC 5V input jack

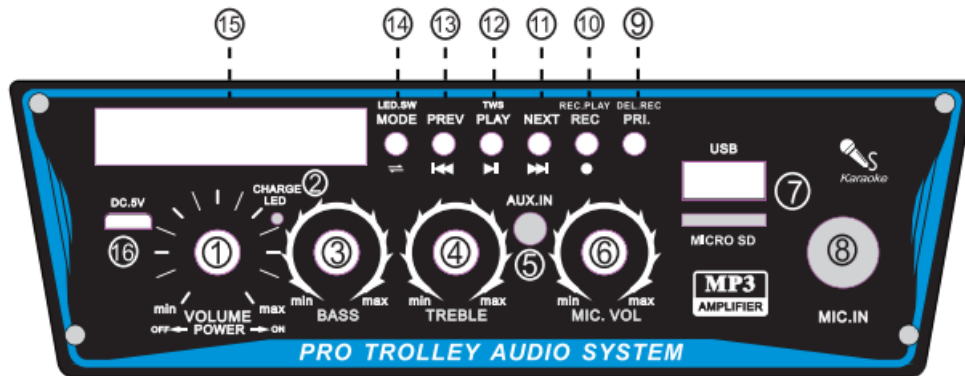

PPHP1042B – PPHP1242B – PPHP1542B CONTROL BOARD FUNCTIONS


1. Master volume control/Power switch
2. 3.5MM AUX input jack
3. Bass volume control knob
4. Treble volume control knob
5. Echo control knob
6. Microphone volume control knob
7. Charge LED indicator, red color is on charge mode, light off is full charge mode
8. DC 9V input jack
9. 6.5MM microphone input jack
10. Display screen
11. Short press to choose mode/Press and hold to turn ON/OFF light
12. Previous
13. Play/Pause/press and hold for TWS function
14. Next
15. Short press to start recording and short press again to save and play recording Press and hold the press to play recording files, and press and hold again to quit recording
16. Microphone priority button

When playing the recorded file, press and hold to delete the current recording.
17. USB and Micro SD Memory Card Slot

REMOTE CONTROL FUNCTIONS

1. Power: Used to turn on and off the MP3 player power
2. MODE: Used to switch the AUX/
USB/Wireless BT/Radio
3. Mute button

4. Play/Stop button
5. Next song on USB
6. Previous song on USB
7. EQ solution
8. Increase volume
9. Choose song number directly
10. Choose USB signal directly
11. Decrease volume
12. Repeat the song

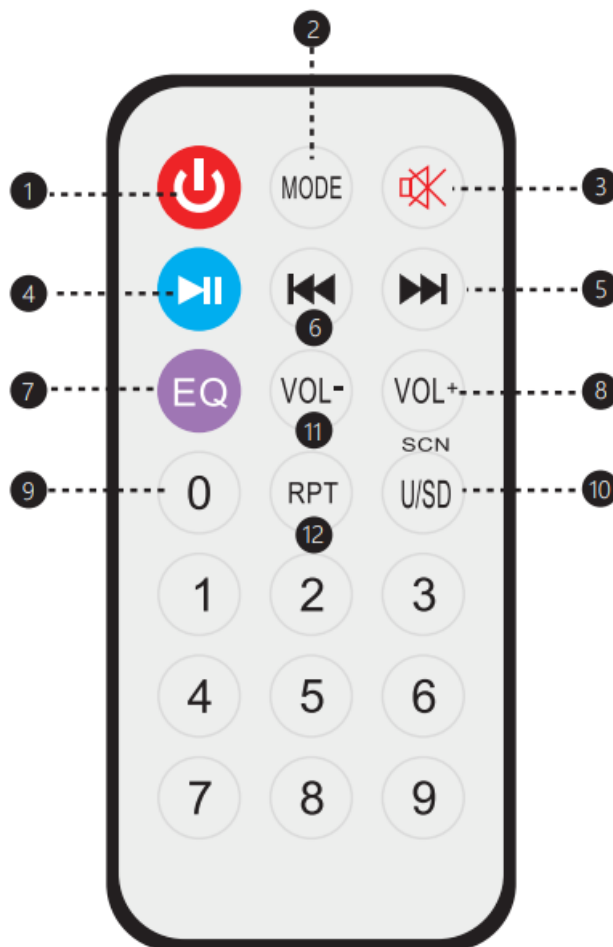

TWS FUNCTION

To increase the sound effect, our unit provides TWS function as follows:

Step-1: Turn ON BT mode on your device and connect the machine.

Step-2: Press and hold each control board “TWS” button more than 3’s, and you will see “ON” on display, the unit will start to connect to the other unit automatically, now you can enjoy stereo sound, and adjusting one unit volume will affect the other unit.

Remark:

1. After connection, press and hold again one of the control board “TWS” buttons more than 3’s, you will see “OFF” on display, unit’s TWS disconnection.

Fault	Possible Cause	Solution
No sound	1.No input sound source. 2. Volume is too low.	1. Use a better music signal. 2. Adjust the volume.
Distortion of sound	1. Volume too high. 2. Speaker may be damaged	1. Turn down the volume. 2. If the speaker is damaged, repair or replace it.
Karaoke does not work	1. Microphone plug is not fully inserted. 2. Microphone switch is not on. 3. Microphone volume knob is at the lowest position.	1. Plug the microphone properly into the socket. 2. Turn on the microphone switch. 3. Adjust microphone volume properly.
MP3 does not play	1. The audio format in the U disc is incorrect. 2. Improper operation has caused a processing disorder. 3. USB disc is disconnected.	1. Convert audio format into Mp3 format. 2. Reboot the machine. 3. Insert USB disc properly.

Wireless BT Streaming:

- Built-in BT for Wireless Music Streaming
- Simple & Hassle-Free Pairing
- Works with All of Today's Latest Devices Smartphones, Tablets, Laptops, Computers, etc.
- Wireless BT Version: 4.2
- Wireless BT Network Name: 'PYLEUSA'
- Wireless Range: Up to 32' ft.

What's in the Box:

- PA Speaker System
- Remote Control
- Power Adapter
- Wired microphone



This product can expose you to a chemical or group of chemicals, which may include "Lead and lead compounds" which is known in the state of California to cause cancer, birth defects, or other reproductive harm. For more info, go to <https://www.p65warnings.ca.gov/>.

PPHP842B

Features:

- True Wireless Stereo System
- Portable Speaker System
- High-Powered PA Loudspeaker Style
- Wireless BT Music Streaming Ability
- Multi-Color Flashing LED Party Lights
- Built-in Rechargeable Battery
- FM Radio with Digital LED Display
- Connect & Stream Audio from External Devices
- Aux (3.5mm) Input Connector Jack
- USB Flash Memory Reader
- Micro SD Card Reader
- 6.5mm Microphone input
- Battery Level LED Indicator Lights
- Recording Function
- Microphone Priority Function
- Bass & Treble Adjust Knobs
- Rugged & Durable Molded Cabinet Design
- Convenient Trolley & Wheels
- For Indoor / Outdoor Use



Technical Specs:

- Construction Material: Polypropylene (PP)
- Max Power Output: 400 Watt Max
- Sound System: 8" -inch Subwoofer + 1" Tweeter
- Impedance: 3.6 Ohm
- Frequency Response: 40Hz-16KHz
- USB Interface Type: 2.0
- Digital Audio File Support: MP3
- Maximum USB Flash Support: 32GB
- Remote Control Battery Operated, 1 Piece Button Cell Battery CR-2025 (Included)
- Battery Life: Up to 3 Hours (Charge Time: Approx. 5Hours)
- Rechargeable Battery: 3.7V, 3600mAh – 13.32Wh
- Power Supply: 120/240V, Switchable (5V/2A Power Adapter)
- Product Dimensions (L x W x H): 9.3" x 7.8" x 14.3" -inches

PPHP1042B

Features:

- True Wireless Stereo System
- Portable Speaker System
- High-Powered PA Loudspeaker Style
- Wireless BT Music Streaming Ability
- Multi-Color Flashing LED Party Lights
- Built-in Rechargeable Battery
- FM Radio with Digital LED Display
- Connect & Stream Audio from External Devices

- Aux (3.5mm) Input Connector Jack
- USB Flash Memory Reader
- Micro SD Card Reader
- 6.5mm Microphone input
- Battery Level LED Indicator Lights
- Recording Function
- Microphone Priority Function
- Microphone Echo Adjust Knob
- Bass & Treble Adjust Knobs
- Rugged & Durable Molded Cabinet Design
- Convenient Trolley & Wheels
- For Indoor / Outdoor Use



Technical Specs:

- Construction Material: Polypropylene (PP)
- Max Power Output: 600 Watt Max
- Sound System: 10" -inch Subwoofer + 1" Tweeter
- Impedance: 3.6 Ohm
- Frequency Response: 40Hz-16KHz
- USB Interface Type: 2.0
- Digital Audio File Support: MP3
- Maximum USB Flash Support: 32GB
- Remote Control Battery Operated, 1 Piece Button Cell Battery CR-2025 (Included)
- Battery Life: Up to 3.5 Hours (Charge Time: Approx. 5 Hours)
- Rechargeable Battery: 7.4V, 3600mAh – 26.64 Wh
- Power Supply: 120/240V, Switchable (9V/1.5A Power Adapter)

- Product Dimensions (L x W x H): 11.6" x 8.4" x 17.9" -inches

PPHP1242B

Features:

- True Wireless Stereo System
- Portable Speaker System
- High-Powered PA Loudspeaker Style
- Wireless BT Music Streaming Ability
- Multi-Color Flashing LED Party Lights
- Built-in Rechargeable Battery
- FM Radio with Digital LED Display
- Connect & Stream Audio from External Devices
- Aux (3.5mm) Input Connector Jack
- USB Flash Memory Reader
- Micro SD Card Reader
- 6.5mm Microphone input
- Battery Level LED Indicator Lights
- Recording Function
- Microphone Priority Function
- Microphone Echo Adjust Knob
- Bass & Treble Adjust Knobs
- Rugged & Durable Molded Cabinet Design
- Convenient Trolley & Wheels
- For Indoor / Outdoor Use



Technical Specs:

- Construction Material: Polypropylene (PP)
- Max Power Output: 800 Watt Max
- Sound System: 12" -inch Subwoofer + 1" Tweeter
- Impedance: 3.6 Ohm
- Frequency Response: 40Hz-16KHz
- USB Interface Type: 2.0
- Digital Audio File Support: MP3
- Maximum USB Flash Support: 32GB
- Remote Control Battery Operated, 1 Piece Button Cell Battery CR-2025 (Included)
- Battery Life: Up to 3 Hours (Charge Time: Approx. 5 Hours)
- Rechargeable Battery: 7.4V, 3600mAh – 26.64 Wh
- Power Supply: 120/240V, Switchable (9V/1.5A Power Adapter)
- Product Dimensions (L x W x H): 13.6" x 9.9" x 20.7" -inches

PPHP1542B

Features:

- True Wireless Stereo System
- Portable Speaker System
- High-Powered PA Loudspeaker Style
- Wireless BT Music Streaming Ability
- Multi-Color Flashing LED Party Lights
- Built-in Rechargeable Battery
- FM Radio with Digital LED Display
- Connect & Stream Audio from External Devices
- Aux (3.5mm) Input Connector Jack
- USB Flash Memory Reader
- Micro SD Card Reader
- 6.5mm Microphone input
- Battery Level LED Indicator Lights
- Recording Function
- Microphone Priority Function
- Microphone Echo Adjust Knob
- Bass & Treble Adjust Knobs
- Rugged & Durable Molded Cabinet Design
- Convenient Trolley & Wheels
- For Indoor / Outdoor Use



Technical Specs:

- Construction Material: Polypropylene (PP)
- Max Power Output: 1200 Watt Max
- Sound System: 15" -inch Subwoofer + 1" Tweeter
- Impedance: 3.6 Ohm
- Frequency Response: 40Hz-16KHz
- USB Interface Type: 2.0
- Digital Audio File Support: MP3
- Maximum USB Flash Support: 32GB
- Remote Control Battery Operated, 1 Piece Button Cell Battery CR-2025 (Included)
- Battery Life: Up to 2.5 Hours (Charge Time: Approx. 5 Hours)
- Rechargeable Battery: 7.4V, 3600mAh – 26.64 Wh
- Power Supply: 120/240V, Switchable (9V/1.5A Power Adapter)
- Product Dimensions (L x W x H): 17.8" x 13.3" x 27.4" -inches

PYLE
PyleUSA.com



VISIT US ONLINE:

Have a question? Need service or repair?

Want to leave a comment?

[.PyleUSA.com/ContactUs](https://www.pyleusa.com/ContactUs)

Questions? Issues?

We are here to help!

Phone: (1) 718-535-1800

Email: support@pyleusa.com

Documents / Resources



[PYLE PPHP842B Wireless BT Portable PA Speaker](#) [pdf] User Manual
PPHP842B, PPHP1042B, PPHP1242B, PPHP1542B, Wireless BT Portable PA Speaker

References

- [P Pyle USA Electronics | Home Audio | Car Audio & More](#)
- p65warnings.ca.gov/

Manuals+.