



# Radial engineering StageBug SB-2 Passive Direct Box User Guide

[Home](#) » [Radial engineering](#) » Radial engineering StageBug SB-2 Passive Direct Box User Guide 

## Contents

- [1 Radial engineering StageBug SB-2 Passive Direct Box](#)
- [2 Instructions](#)
- [3 Documents / Resources](#)
  - [3.1 References](#)
- [4 Related Posts](#)




## Radial engineering StageBug SB-2 Passive Direct Box



### Instructions

Thank you for purchasing the StageBug SB-2, a compact passive direct box that is perfect for active basses and keyboards. The SB-2 does not require any power to operate: simply connect to the input using a standard 1/4" instrument cable, and take the balanced XLR output to a microphone input on the PA mixing console. A Thru output can be used to feed a tuner or a stage amplifier, or it can be used as a second input to sum stereo keyboards down to mono to save mixer channels.


1. Using the SB-2 with electric bass.
2. Using the SB-2 with a keyboard.

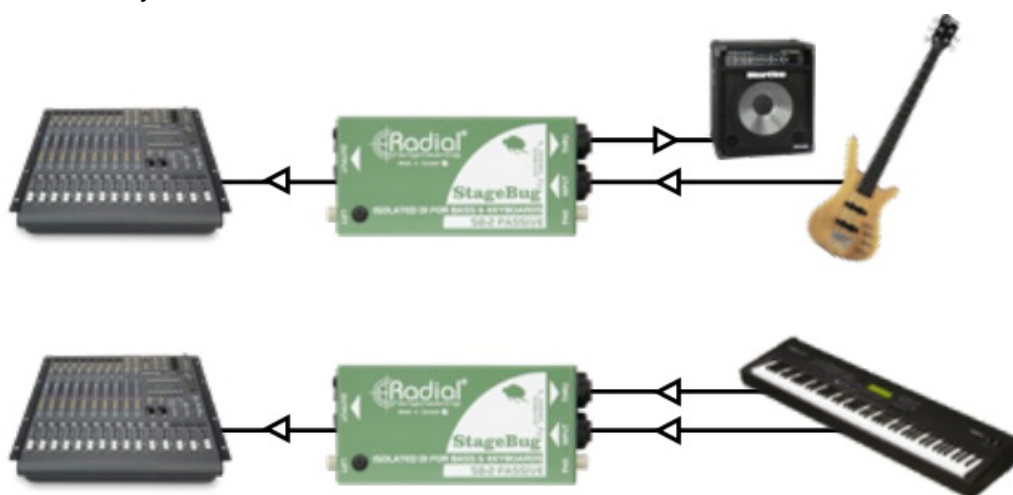

Copyright Radial Engineering Ltd. Specifications & appearance subject to change without notice. Manual Part # R870 1057 00 / 09-2021

For additional information including frequently asked questions, please visit our website at [www.radialeng.com](http://www.radialeng.com)

Documents / Resources

	<a href="#">Radial engineering StageBug SB-2 Passive Direct Box</a> [pdf] User Guide StageBug SB-2 Passive Direct Box, StageBug SB-2, Passive Direct Box, Direct Box, SB-2 Direct Box, StageBug Direct Box
---	---

References

- [Radial Engineering](#)