



[Home](#) » [RadioShack](#) » **radioshack BT09S Bluetooth Audio Receiver With Type-C Input and Car Charger User Guide** 

Contents [[hide](#)]

- [1 radioshack BT09S Bluetooth Audio Receiver With Type-C Input and Car Charger](#)
- [2 Introduction](#)
- [3 Packing Contents](#)
- [4 Features](#)
- [5 Specifications](#)
- [6 Compatibility](#)
- [7 Precautions](#)
- [8 Appearance](#)
- [9 Operation Instructions](#)
- [10 Quick Guide](#)
- [11 FCC Statement](#)
- [12 Frequently Asked Questions](#)
- [13 Documents / Resources](#)
 - [13.1 References](#)



radioshack BT09S Bluetooth Audio Receiver With Type-C Input and Car Charger



Introduction

Thanks for choosing our Bluetooth receiver. This device allows you to hear the phone music and call not just from car radio, but also from home speaker. Because of its special structure. Once two parts hooked up and plugged to any USB charging port, its will start charging automatically. Fully charged 2 hours, it will provides up to 7 hours of music playing time or 5.5 hours of talking time. To have a better experience, please read this instruction carefully.

Packing Contents

- Bluetooth Receiver
- User Guide
- Charging Cable

Features

1. Advance Bluetooth technology V5.3
2. Wireless audio streaming for home speakers or car stereo system
3. Dual Battery Charging Solutions with two Touch Spots and Type-C input port
4. Dual USB output ports with QC3.0+5V/2.4A(total 30W)
5. Built-in 300mAh battery

6. Built-in LED light for working status indication
7. Full-charge time about 2 hours
8. Audio receiver head can work as an independent accessory
9. Protection for over-circuit voltage, over heat, short circuit
10. Quickly active Siri/Google assistant

Specifications

- **Bluetooth Version:** V5.3
- **Bluetooth ID:** BT09S
- **Bluetooth Frequency range:** 2.402~2.480GHz
- **Bluetooth Distance:** about 8M (open area)
- **Battery Capacity:** 300mAh 3.7V
- **Charging time:** about 2 hours
- **Talking time:** about 5.5 hours
- **Music playing time:** up to 7 hours
- **Standby time:** auto power-off 10 minutes after disconnected
- **Size:** 98.5*34.4*34.5mm
- **Microphone:** ∅ 4.0*1.5mm
- **Product weight:** 52.4g
- **Material:** Aluminum alloy + ABS Housing

Compatibility

This device can be paired as a hands-free kit with any compatible Bluetooth-enabled devices. Each time can only connected with one Bluetooth device.


Precautions

Please read all safety instruction warnings carefully before using this product. Improper use of this product may result in damage to this or attached products. To ensure the products work well, please never use this in the following conditions:

1. Moist or underwater conditions.
2. Conditions near heater or high-temperature service.
3. Conditions with direct and strong sunshine,

4. Conditions with apt falling
5. Never dismantle the product without due permission, otherwise it may nullify the warranty clause.

Appearance

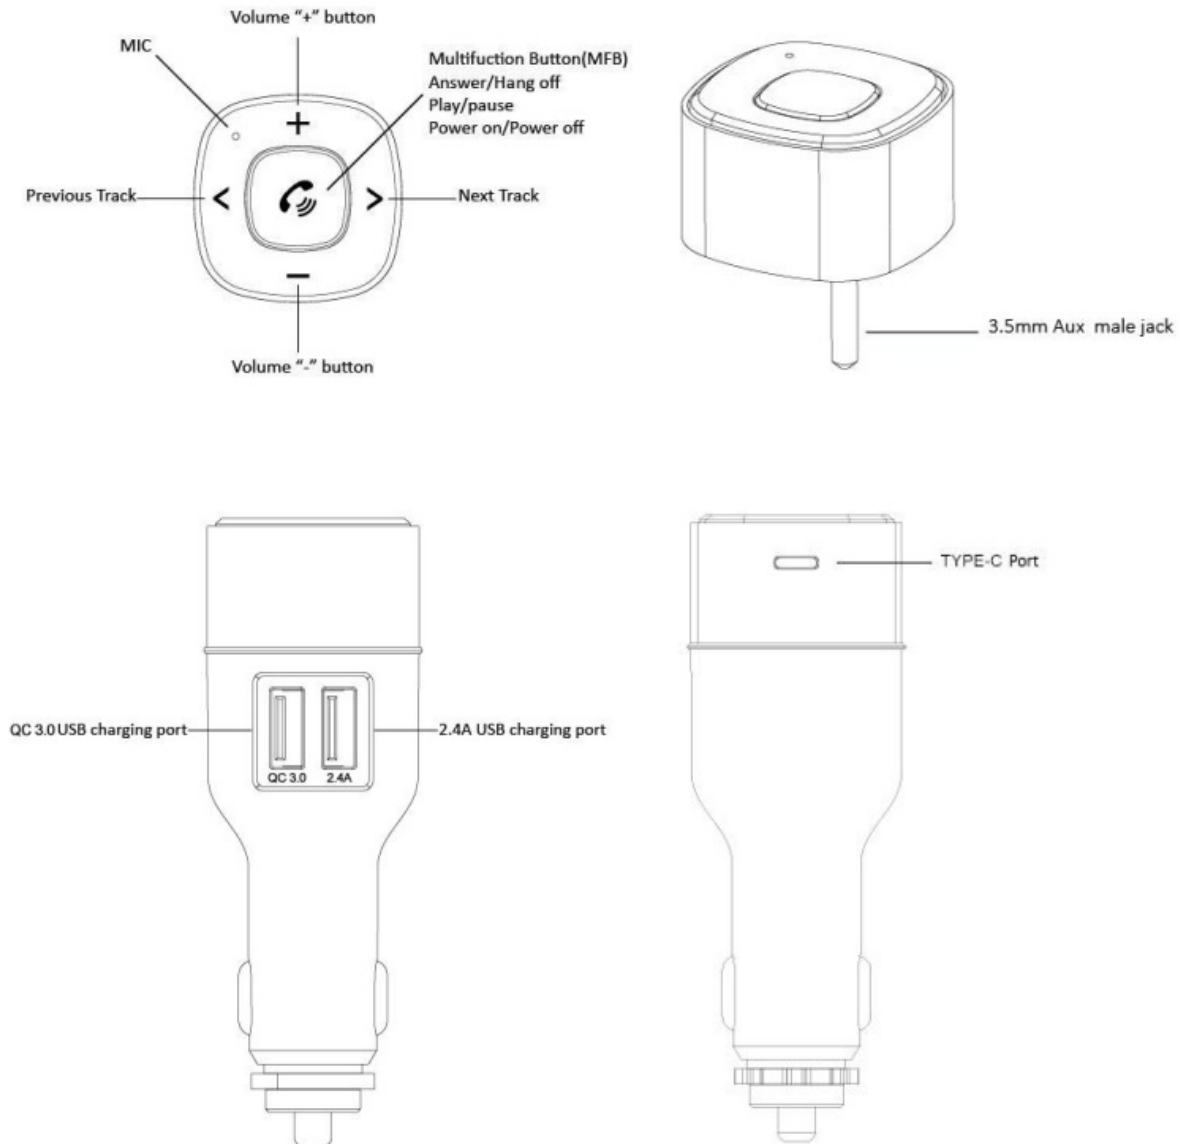

Operation Instructions

Using the music playing function

1. Plug the Bluetooth receiver's 3.5mm male jack into your vehicle's FM radio or home speaker auxiliary port.
2. Long-press and hold on the MFB for 5 seconds, the LED light begins to flash and prompt with "Power on"
3. Turn on your Bluetooth enabled devices and search new device named "BT09S", then

pair with this unit.

4. Turn on your music, then you can enjoy the crystal audio sounds.
5. Press MFB once to Play/Pause if you need it.

Using the hands-free function:

1. Press MFB once to answer/Hang off the phone call when there is an incoming call.
2. Press MFB and hold 2 seconds to reject the phone call.
3. Press MFB twice to redial the last phone call.
4. Press MFB and hold 2 seconds during conversation so as to hear the call with the BT09C or the Phone.

Charging the Bluetooth Receiver

1. When the battery power is low, the relative prompt will appear and its status will also display on your phone.
2. It starts charging when the two parts hooked, plug the USB adapter to the charging port, and it will be fully charged within 2 hours.

Cautions: This device can't work while charging.

Quick Guide

Power on	Press MFB and hold for 5 seconds until flashing and prompting you with "Power on"
Power off	Press MFB and hold for 5 seconds until prompt "Power off"

Play/Pause music	Press MFB once during music playing
Answer call	Press MFB once when there is incoming call
End call	Press MFB once during call
Redial call	Press MFB twice while standby
Reject call	Press MFB and hold for 2 seconds when there is an incoming call
Adjust the volume	Press and hold “+”button: increase volume Press and hold “-” button: decrease volume
Choose music	Press “<” button: Play the previous song Press “>” button: Play the next song
Switch phone calls between BT09S and Phone	Press MFB and hold for 2 seconds during conversation

FCC Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

To assure continued compliance, any changes or modifications not expressly approved by the party.

Responsible for compliance could void the user's authority to operate this equipment. (Example- use only shielded interface cables when connecting to computer or peripheral devices).

This equipment complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

1. This device may not cause harmful interference, and
2. This device must accept any interference received, including interference that may cause undesired operation.

FCC Radiation Exposure Statement:

The equipment complies with FCC Radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator and your body.

Frequently Asked Questions


- **Q: Can I use the device while it’s charging?**

A: No, this device cannot work while charging.

- **Q: How do I adjust the volume?**

A: Press and hold the + button to increase volume, hold the – button to decrease volume.

Documents / Resources

	<p>radioshack BT09S Bluetooth Audio Receiver With Type-C Input and Car C harger [pdf] User Guide</p> <p>BT09S, BT09S Bluetooth Audio Receiver With Type-C Input and Car Char ger, Bluetooth Audio Receiver With Type-C Input and Car Charger, Audio Receiver With Type-C Input and Car Charger, Receiver With Type-C Input and Car Charger, Type-C Input and Car Charger, Input and Car Charger</p>
--	---

References

- [User Manual](#)

RadioShack

Audio Receiver With Type-C Input and Car Charger, Bluetooth Audio Receiver With Type-C Input and Car Charger, BT09S, BT09S Bluetooth Audio Receiver With Type-C Input and Car Charger, Input and Car Charger, RadioShack, Receiver With Type-C Input and Car Charger, Type-C Input and Car Charger

Leave a comment

Your email address will not be published. Required fields are marked *

Comment *

Name

Email

Website

☐ Save my name, email, and website in this browser for the next time I comment.

Post Comment

Search:

e.g. whirlpool wrf535swhz

Search

[Manuals+](#) | [Upload](#) | [Deep Search](#) | [Privacy Policy](#) | [@manuals.plus](#) | [YouTube](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.