



RAYSGEM M2G Smart Mirror User Manual

[Home](#) » [RAYSGEM](#) » RAYSGEM M2G Smart Mirror User Manual 

Contents

- [1 RAYSGEM M2G Smart Mirror](#)
- [2 Product Information: M2G Smart Mirror](#)
- [3 Product Usage Instructions: M2G Smart Mirror](#)
- [4 Package](#)
- [5 Introduction](#)
- [6 Specifications](#)
- [7 Troubleshooting](#)
- [8 Documents / Resources](#)
 - [8.1 References](#)
- [9 Related Posts](#)

RAYSGEM

RAYSGEM M2G Smart Mirror



Product Information: M2G Smart Mirror

The M2G Smart Mirror is an interactive terminal that functions as a dressing mirror with added features such as touch screen, display, and voice control. It serves as a comprehensive hub for all smart devices and helps establish a smart home system for kitchen and bathroom. For more information about the M2G Smart Mirror, please visit our website <https://raysgem.com>.

Package Contents

- Mirror*1
- Power adapter*1
- User Manual*1
- Installation Instruction*1
- Screwhead *3
- Dilating screw *3

Front View

1. Mirror panel
2. Display area (Full HD display)
3. Touch area (Full touch on display area)
4. Touch button (ON/OFF)
5. Speakers (Left and right sides)

Back View

- Wall Anchor (Wall mount support)
- Metal casing (Frosted surface)
- MIC
- USB type A
- USB DC (DC 12V 4A)

Product Usage Instructions: M2G Smart Mirror

Start up & Shut down

Start up: Press the power button for 2 seconds, and the Smart Mirror will boot up until the home page appears.

Re-start: Long press the power button for 10 seconds, and the Smart Mirror will re-start.

Display Control

Turn ON/OFF the display: Single tap the power button to turn ON/OFF the display. You can also single tap on the screen to turn on the display.

LED Light Control

Turn ON/OFF the LED light: Single tap the LED light button to turn ON/OFF the LED light. Single tap the LED light button quickly to switch between light colors. Long press the LED light button to adjust the light brightness. The LED light button is blue when the LED light is off and white when the LED light is on.

Anti-fog Function Control

Turn ON/OFF the Anti-fog function: Single tap the anti-fog button to turn on the anti-fog function, and single tap again to turn it off. The button is blue when the anti-fog is off and white when the anti-fog is on. The anti-fog function will be turned off automatically when it has been working for more than one hour.

Warning

Do not try to open Smart mirror in case of electric shock

Note: In case of electric shock, please do not try to open Smart mirror. When malfunction happens, please consult a profession before you open Smart mirror .

This is a sign of high voltage danger. Any contact with the internal parts can be extremely dangerous.


This is for important notes of how to maintain Smart mirror.

- Please keep Smart mirror away from any heat or under direct sun light.
- Please keep Smart mirror away from anything that can generate heat, such as candles, ashtrays, incensation, combustible gas or explosive substance.
- Please do not overload your wall sockets, extension power cables.
- Please place the power cable properly without anything pressing again the power cable.
- For safety reasons, please unplug Smart mirror power in storm weather or when you won't be using Smart mirror for a long time.
- Please use proper direct current supply for Smart mirror. Make sure your local DC power is within safety range.
- In case of any electric shock, please do not insert any metal object into Smart mirror sockets.
- Please make sure power jack is plugged in tightly into your power socket. Unplug power jack when you disconnect Smart mirror.
- Please do not touch Smart mirror's power cable with wet hands.

- In case of any malfunction, especially when there's unusual sound or smell coming out of Smart mirror, please unplug the power and contact your supplier immediately.
- If you'll be leaving Smart mirror unused for a very long time or traveling with our senior family members, children and people with disabilities at home, please make sure to unplug Smart mirror.
- Too much dirt on the power socket or cable might generate heat and cause insulation aging, please keep it clean in case of electric shock and fire.
- Please make sure your power socket is well grounded in case of electric shock or damage to Smart mirror.
- To unplug Smart mirror is to unplug from your power socket, for convenience, we recommend you to use power socket with its own ON/OFF switch.
- Please do not allow children to play with Smart mirror.
- Please install Smart mirror in a safe place, any wobble or tilt installation puts Smart mirror in a vulnerable position.
- In case of fall and damage to Smart mirror, please unplug the power and contact your local supplier immediately.
- Unplug Smart mirror before you clean it. Use soft and dry cloth to wipe it clean. Do not use any chemical solution on Smart mirror surface for it might erode Smart mirror.

Package




Standard Smart Mirror package contains the following items as below. Please contact your local retailer if anything is missing. Some of the items in this manual may differ because of customization or model.

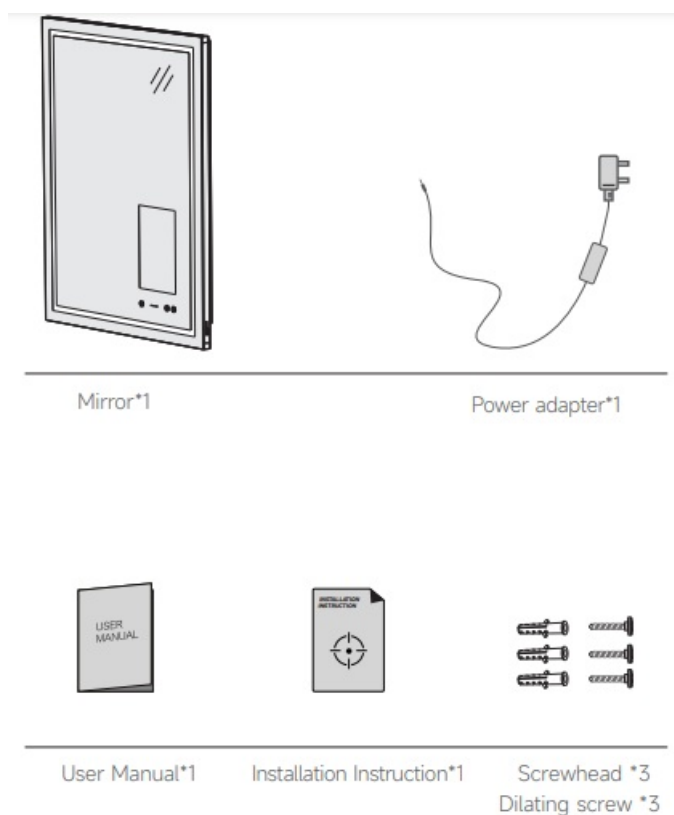

Introduction


Smart Mirror is a mirror that can serve you as a dressing mirror, but also comes with touch screen, display and voice control. Mirror is an interactive terminal of master control, and a comprehensive hub for all smart devices. Smart Mirror helps to establish a smart home system for kitchen and bathroom. For more information, please visit

Front View

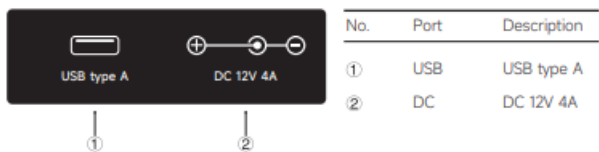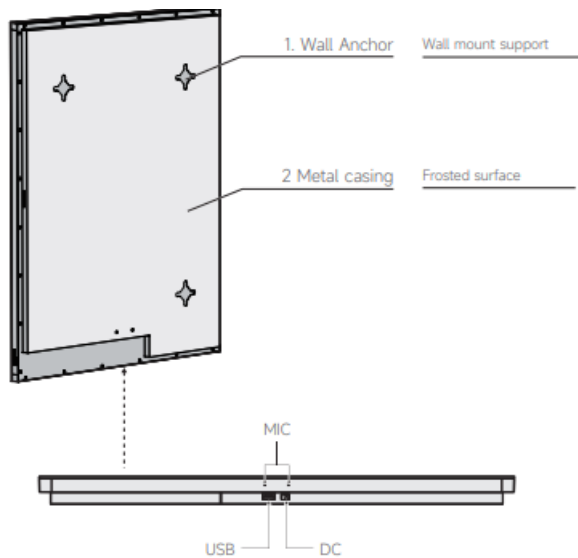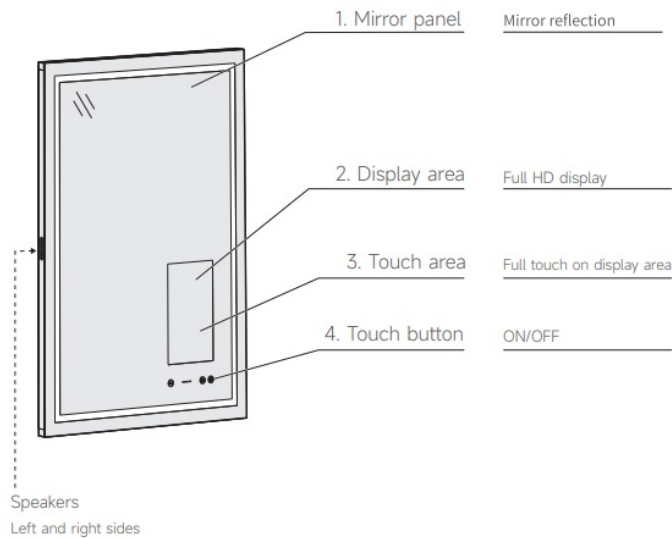


Start up & Shut down

1. **Start up:** Press the power button for 2 seconds, Smart Mirror will boot up till the home page appears.
- 2.

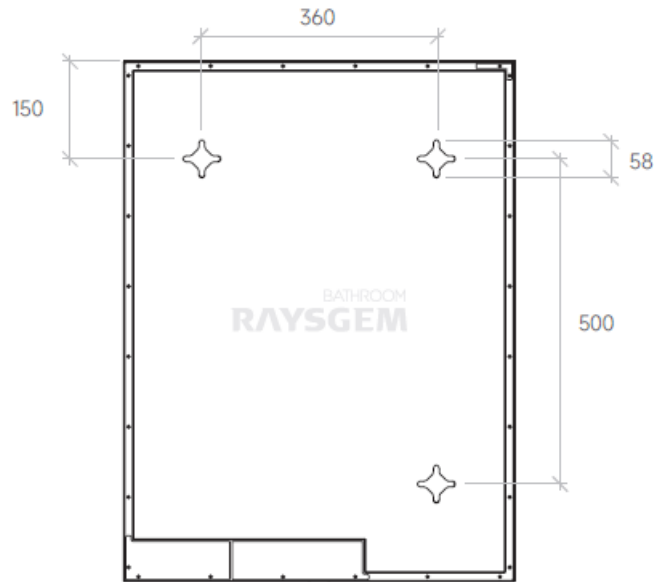


Back view


Long press the power button for 10 seconds, Smart Mirror will Re-start.

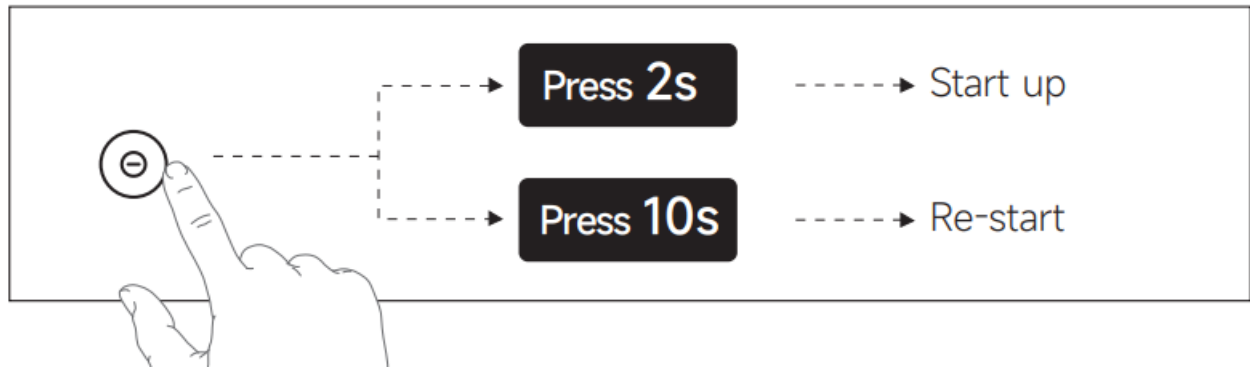

3. **Turn ON/OFF the display:** Single tap the power button to Turn ON/OFF the display. Single tap on screen also can turn on The display.
4. **Turn ON/OFF the LED light:** Single tap the LED light button to turn ON/OFF the LED light, single tap the LED light button quickly to switch Between the light colors, Long press the LED light button to adjust the Light brightness. The LED light button is in blue when the LED light is off, and it is in white when the LED light is on.

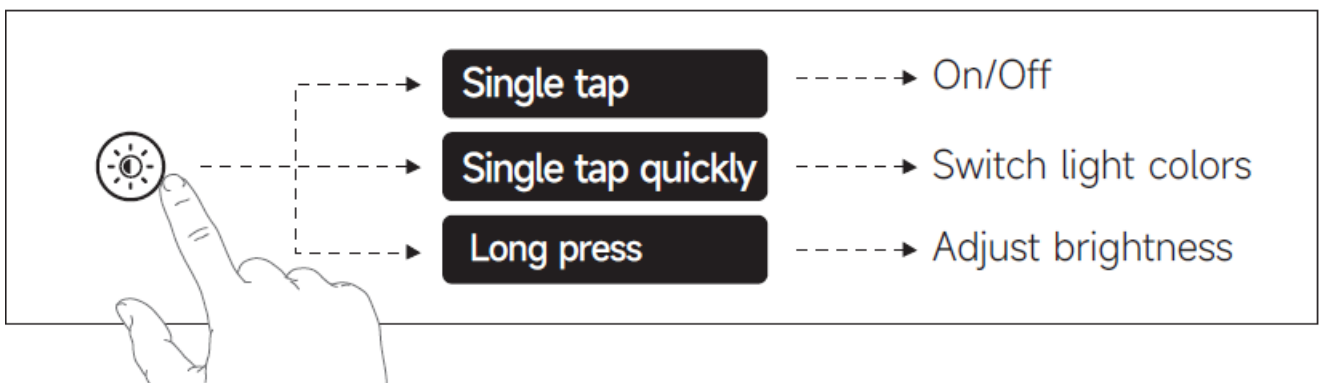

5. **Turn ON/OFF the Anti-fog function:** Single tap the anti-fog button to turn on the anti-fog function, and single tap again to turn it off. The button is in blue when the anti-fog is off, and it is in white when the anti-fog is on. The anti-fog will be turned off automatically when it has been working for more than one hour.

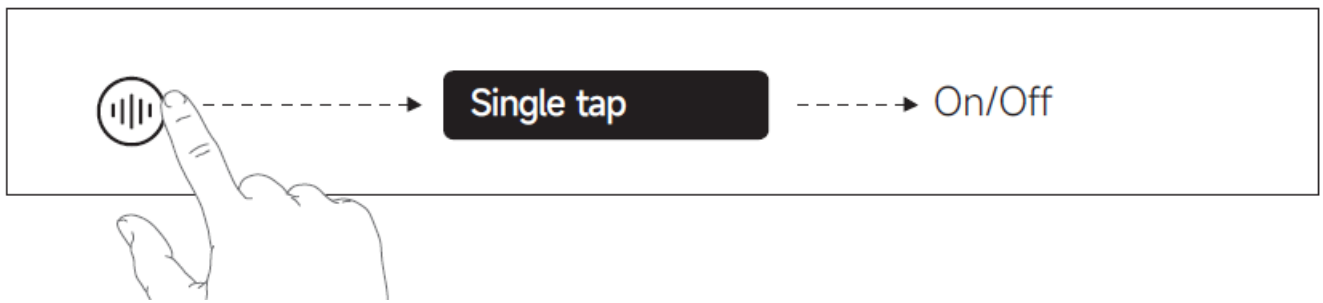


Voice Control

The smart mirror supports Google assistant voice control. Please sign in Google assistant with your Google account. When the first time the smart mirror is powered on. Set your own language and match your voice in Google assistant. Say "Hey Google" to active Google assistant within 5 meters from the smart mirror.



WLAN network setting

Enter Android system setting after the smart mirror is powered on, enter WLAN and turn it on, Enter your WiFi password to connect with internet.

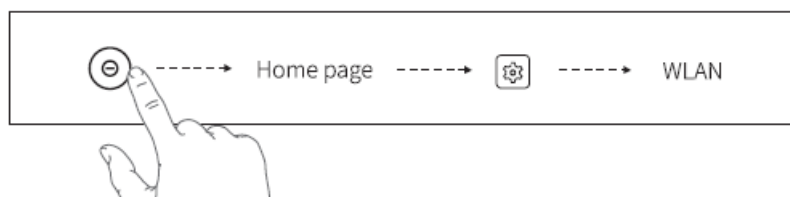


App Installation

Enter Google Play Store after the smart mirror is powered on, log in Google Play Store with your Google account at the first time, then search, download and install your favorite apps.


Bluetooth

Enter Android system setting after the smart mirror is powered on, enter connected devices and enter Connection preferences,
Enter Bluetooth and turn it on to search and pair with your Bluetooth devices.

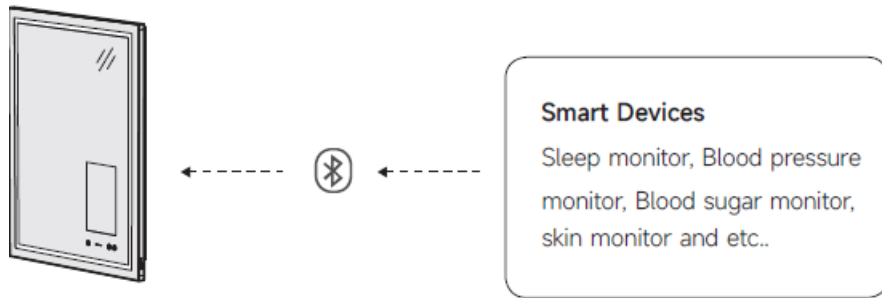


Connect to your Smart Home

Install and Enter Google Home, enter Add and manage, create new home or set up device in an existing home, Enter Work with Google to search and authorize with your Smart Home brands. Use Google Home or Google assistant to control the smart home devices after the authorization with your Google account.

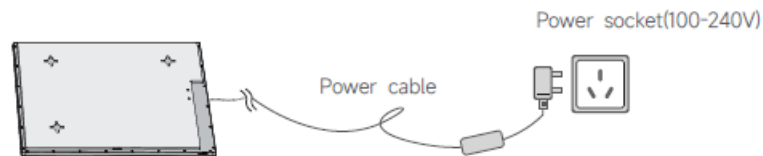

1. Connect Mirror to power as shown above.
2. Long press the power button to start up the smart mirror after the power is successfully connected.

Connect to USB device

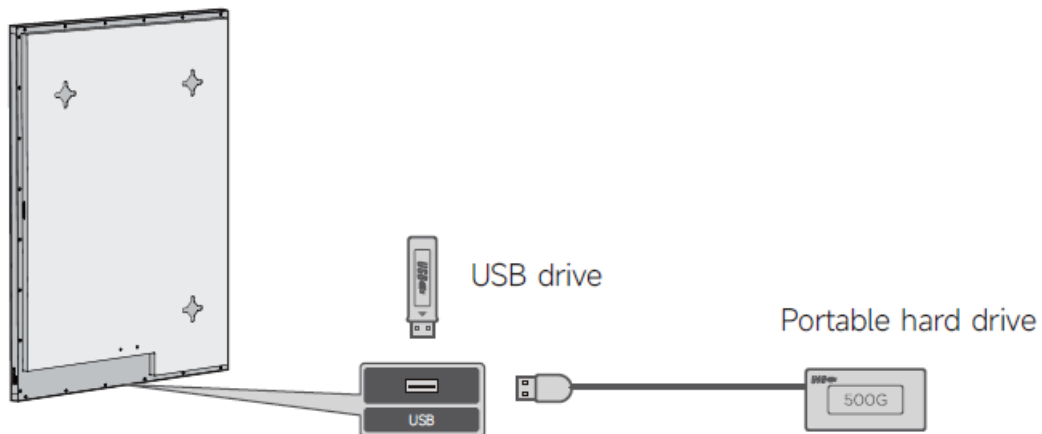

Insert USB drive or portable hard drive to Mirror through USB port.


Flush Mount

Open a recess as shown in the wall where you want to install the Mirror, fix Mirror to the wall.




Wall Mount

Hang Mirror directly to the wall.

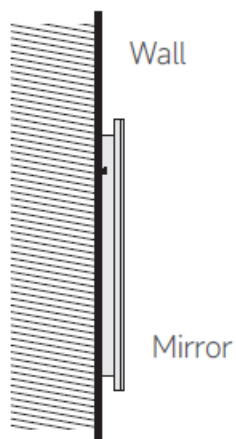



Customized Installation

Install the Mirror same as wall mount, add customized frame around the mirror.

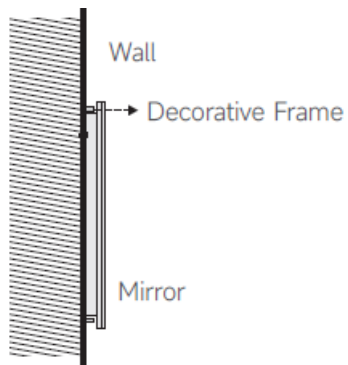


Wall Mount

Fix the screws into the wall and hang the Smart Mirror.

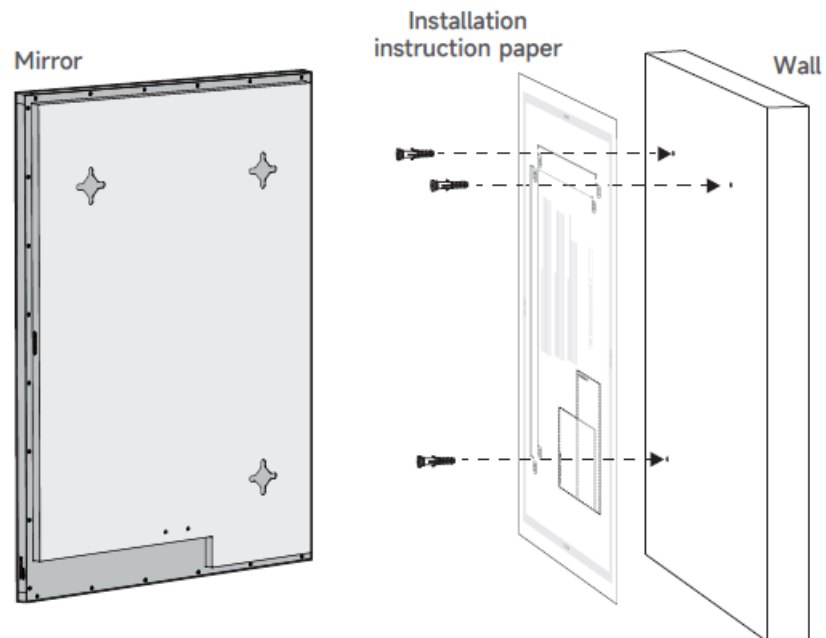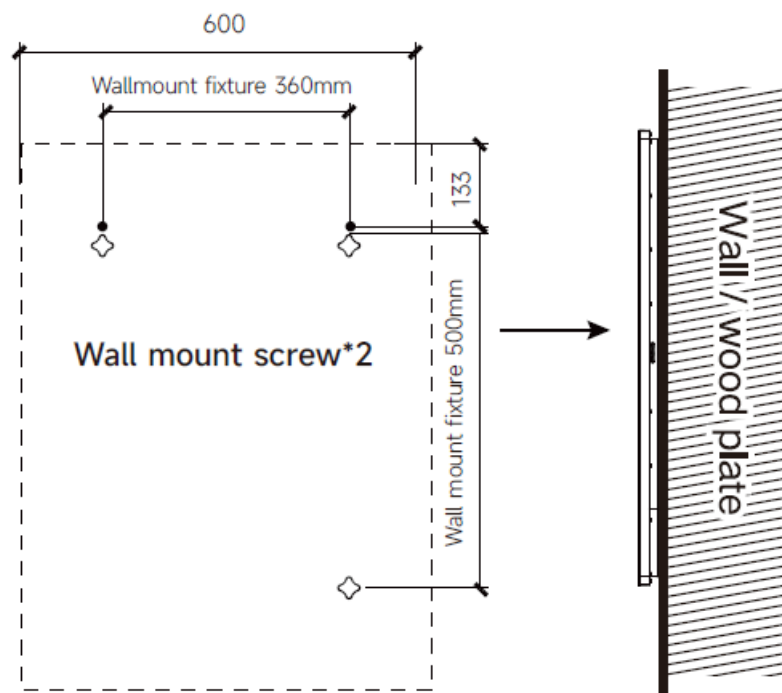

Notes: Be careful during installation to avoid scratching the mirror surface.

Front view

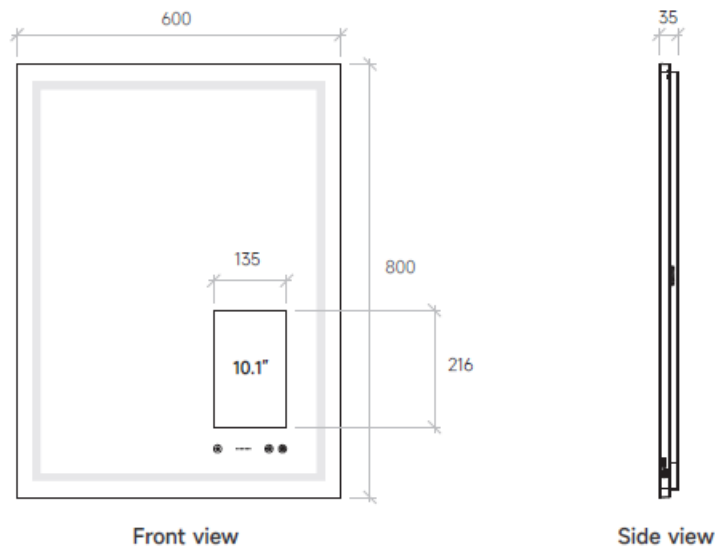

Back view

No further notice on small changes on the same model.

Specifications

- Display size 10.1 inch
- Display type Resolution IPS
- Contrast ratio 1920*1200
- Brightness 650cd/m (Original LCD screen)
- Viewing angle 178°(H) * 178°(V)
- Response time 25ms

Configuration

- CPU 2.0GHz A75*2 + 1.8GHz A55*6
- GPU Mali-G52
- RAM 4GB
- ROM 32G
- Camera No
- WIFI Double frequency 2.4/5GHz IEEE 802.11a/b/g/n/ac
- Bluetooth Bluetooth 5 Bluetooth Smart
- LED lighting Yes
- Anti-fog film Yes
- Speaker 2*3W
- Touch screen Yes(5 points)
- Voice Assistant Yes
- OS Android 11

Consumption

- Power input DC 12V 4A

- Consumption $\leq 48W$
- Standby $\leq 1W$

Interfaces

- Power input DC 12V
- USB Type A x 1..

Dimension/Material/Process

- General size 800mm(H)x600mm(W)
- Thickness 35mm
- Mirror panel Coated silver mirror
- Material/Process Metal housing and Aluminum frame
- Gross weight 13.7 kg
- Net weight 9.6 kg
- Package dimension 930*740*170mm

Others

Notes

- Use only original power cable that comes with the Smart Mirror.
- Keep power cable in good shape and condition.
- In any case of malfunction, unplug Smart Mirror immediately.
- Unplug the Smart Mirror if you won't be using it for a long time.

In any case of malfunction, before sending Smart Mirror for maintenance, please read the following instructions and solution.

Troubleshooting

Troubleshooting is only for users who are facing major operating issues on Smart mirror. If users should have problems with specific functional page, please go to your retailer to get user manuals on specific functions.

Couldn't start up Smart Mirror

1. Check if power jack is loose.

No image/sound or bad display

NOTE


1. Declaration of Conformity (DOC)

RAYSGEM ELECTRONICS & TECHNOLOGY CO., LTD, hereby declares that this product conforms to Directive 2014/53/EU.

Disposal

This symbol must appear on any electrical and electronic equipment placed on the EU market. This symbol indicates that this device should not be disposed of as unsorted municipal waste at the end of its service life. Owners of WEEE (Waste from Electrical and Electronic Equipment) shall dispose of it separately from unsorted municipal waste. Spent batteries and accumulators, which are not enclosed by the WEEE, as well as lamps that can be removed from the WEEE in a non-destructive manner, must be removed by end users from the WEEE in a non-destructive manner before it is handed over to a collection point.

Documents / Resources

	RAYSGEM M2G Smart Mirror [pdf] User Manual M2G Smart Mirror, M2G, Smart Mirror, Mirror
---	---

References

- [R Smart Mirror, Worthy Everyday | Touch Screen & Voice Control](#)